


## Quartz Crystal


SMD-version

part no.	12.88722
model	KX – 7T
frequency	16.0 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
storage temperature	-40° ~ +125°C
frequency tolerance at +25°C	±10 ppm
temperature tolerance -40° ~ +85°C	±25 ppm
load capacitance $C_L$	12 pF
series resonance R1 max.	60 Ohm
aging at 25°C (first year) max.	±2 ppm
shunt capacitance $C_O$ max.	3.0 pF
drive level max.	0.05 mW
AEC-Q 200	yes
contents of reel	1000 pcs.


### Dimensions (mm):

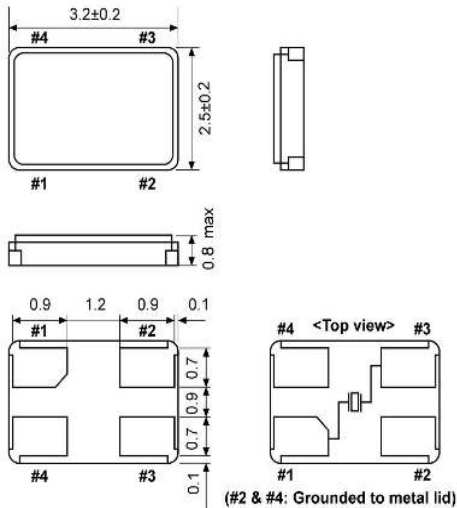

### Reflow soldering condition:

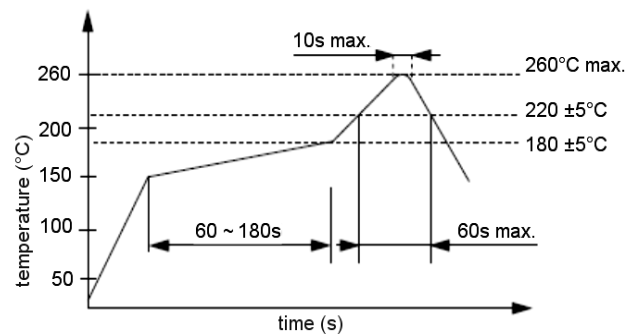

### Suggested soldering pad:



### Tape specification:

