

SIGN	DATE	DESCRIPTION	APPROVER
△	12/04'10	The DWG NO. is changed from 8T30007 to 8T30006	Tason
△	12/04'10	Add the "tuv" Safety Approval	Tason




THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Materials

Item 1 insulating body	Thermoplastic (UL94V-0)
Item 2 Steel screw	Screw, Zinc plating("+/-" slot type)
Item 3 Wire guard	Stainless steel
Item 4 Terminal body	Brass Tin plated

Electrical UL △ TUV

- Voltage rating: 300VAC/250VAC
- Current rating: 8A/12A
- Wire range:
- Solid wire(AWG): 14-26/0.2-2.5mm²
- Stranded wire(AWG): 14-26/0.2-2.5mm²
- Torque: 2.6Lb-In/0.4Nm
- Screw: M2.5
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C/ -40°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: UL △ TUV

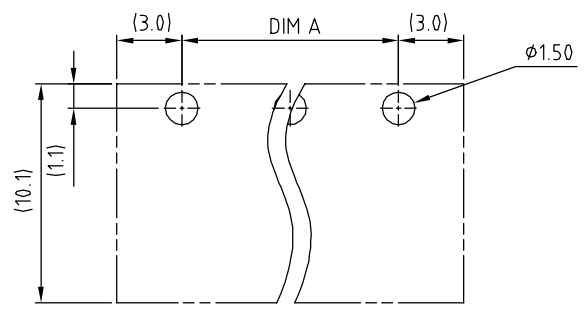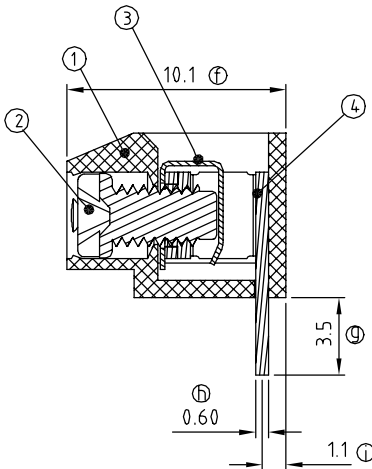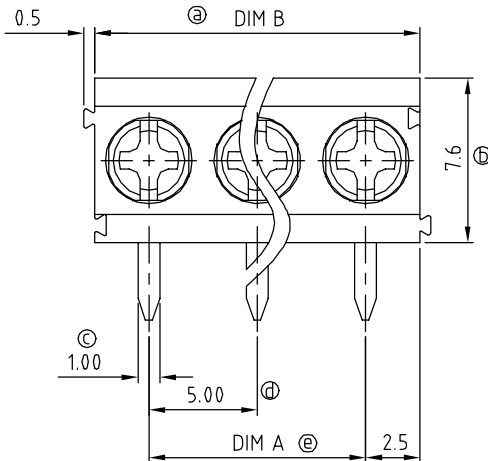

P.C.B. LAYOUT

N = Number of poles
 Dim A = (N-1) X 5.0
 Dim B = N x 5.0

	Dim A	Dim B
2P	±0.05	±0.05
3-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

T3 xx 04 x 3 xxxx G

<ul style="list-style-type: none"> 02 2 CONTACTS 03 3 CONTACTS 12 12 CONTACTS 	<p>Color</p> <ul style="list-style-type: none"> 0 Black (RAL9005) 5 Green(RAL6018/T) 6 Blue (RAL5015/A) 8 Grey(RAL7035/D) 	<ul style="list-style-type: none"> 0000 "⊕" Logo 000A "ANY" Logo Any special item by customer request, please contact sales department 	<p>RoHS Pb<40,000ppm</p>
--	---	---	---------------------------------

<h1>ANYTEK</h1>		<h2>CUSTOMER COPY</h2>	
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE: T3 5.0 Series 90°		DWG NO.: 8T30006 △	
PART NO.: T3xx04x3xxxxG		CUST NO.:	
APPROVED:	CHECKED:	DESIGNED: Tason 熊海燾	DRAWN: 11/08'06
		UNIT: mm SCALE: NONE SHEET: 01/01 REV.: C	
		Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°	