

**(b) Technical specification/
Technische Daten:**

Working voltage/ Betriebsspannung: IEC 664-1	100 VDC
Current rating/ Strombelastbarkeit:	7,5 A (UL) / 5 A (CSA, VDE)
Insulation resistance/ Isolationswiderstand:	≥ 1 GΩ
Dielectric withstanding voltage/ Spannungsfestigkeit (DWV):	424 VDC
Temperature working range/ Umgebungstemperatur:	- 25 °C ... + 105 °C
Capacitance value/ Kapazitätswert:	830 pF ± 20 %
Mating cycles/ Steckzyklen:	Quality class 1 = 500 Gütestufe 1 Quality class 2 = 200 Gütestufe 2 Quality class 3 = 50 Gütestufe 3

**Materials/
Werkstoffe:**

Contact/ Kontakt:	Cu alloy, Au over Ni Contact tails pretinned/ Kontaktspitzen verzinkt
Insulator/ Isolierkörper:	High temp. PA UL 94 V-0
Shell/ Gehäuse:	Steel, Sn over Ni
Metal bracket/ Metallwinkel:	GD-Zn, Sn over Ni
Threaded insert/ Gewindeeinsatz:	Cu alloy, Sn over Ni
Fixing-plate/ Zentrierplatte:	High temp. PA UL 94 V-0

**Installation specification/
Montagedaten:**

Solder parameter/ Lötparameter:	
Solder preheat temperature/ Vorheiztemperatur:	100 °C for 30 sec./ 100 °C für 30 Sek.
Solder bath temperature/ Lötbadtemperatur:	260 °C for 5 sec./ 260 °C für 5 Sek.
PCB hole drillings/ Leiterplattenbohrbild:	see sheet 2/ siehe Seite 2
Recommended torque value for thread/ Empfohlenes Drehmoment für Gewinde:	max. 6 in.LB/ max. 67 Ncm

Metal bracket/
Metallwinkel

Fixing-plate/
Zentrierplatte (b)





Threaded insert/
Gewindeeinsatz

Part no./part marked/ Art.-Nr./Bedruckung:	Quality class/ Gütestufe:	Contact plating/ Kontakt Veredelung:
242A12690X	3	Gold flash over nickel Gold über Nickel
242B12690X	2	20 µin hard gold over min. 50 µin nickel 20 µin Gold über min. 50 µin Nickel
242C12690X	1	30 µin hard gold over min. 50 µin nickel 30 µin Gold über min. 50 µin Nickel

		D-SUB C-Filter female 37pos. solder pin angled 0.590 inch with metal bracket, threaded insert and fixing plate D-SUB C-Filter Buchse 37pol. Lötstift abgewinkelt 14,19 mm mit Metallwinkel, Gewindeeinsatz und Zentrierplatte	
Index: b Ä19-0074 16.05.2019 LUN	Scale/ Maßstab: 2:1		dwg no / Z.-nr.: 24K1A1871
Status: Freigegeben			
RoHS compliant/ konform			1 / 2

This reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. For further information on our products, please refer to our website: www.conec.com. For more information on our products, please refer to our website: www.conec.com.

PCB hole drillings
(PCB top side)
Leiterplattenbohrbild
(Leiterplatten Oberseite)

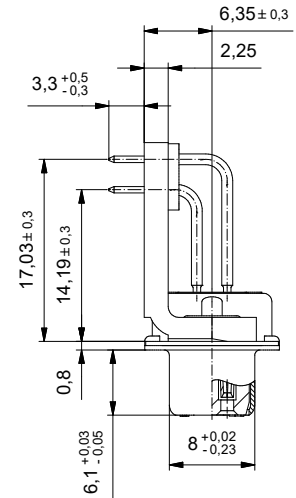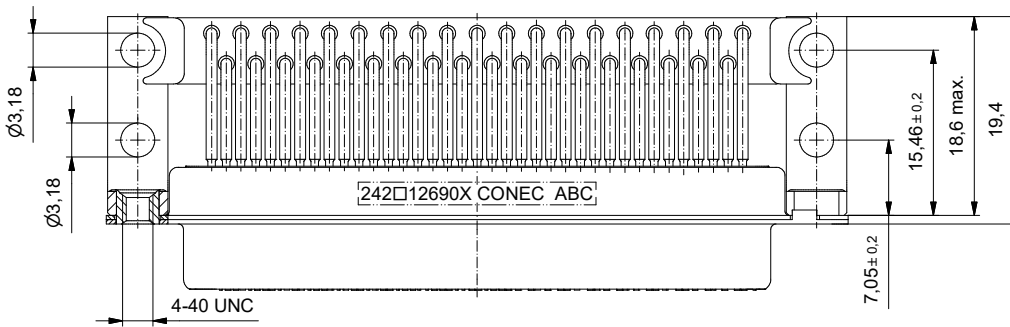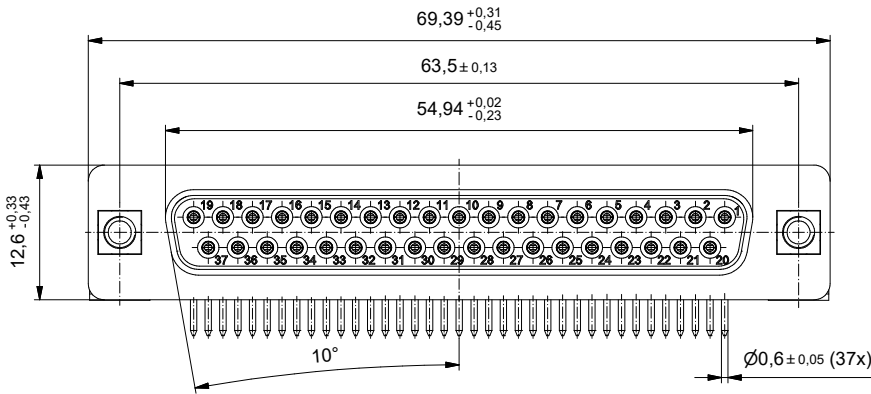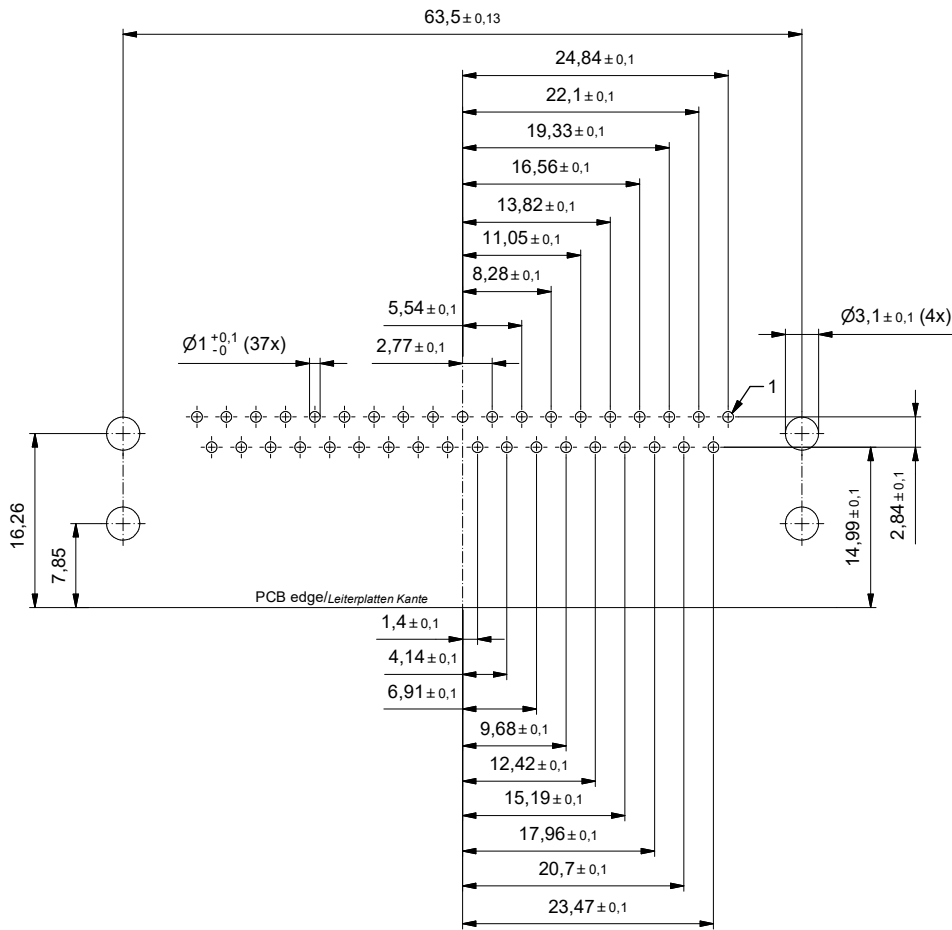

		dim. in mm		D-SUB C-Filter female 37pos. solder pin angled 0.590 inch with metal bracket, threaded insert and fixing plate D-SUB C-Filter Buchse 37pol. Lötstift abgewinkelt 14,19 mm mit Metallwinkel, Gewindeinsatz und Zentrierplatte			
		Date/Datum	Name				
drawn/gez.	16.05.19	Unkrüder					
appd./gepr.	20.05.19	Schmidt					
Index:	b Ä19-0074 16.05.2019 LUN	scale/ Maßstab:	2:1	dwg no / Z.-nr.: 24K1A1871			
Status:	Freigegeben	CONEC		DIN-A3			
RoHS compliant/ konform				2 / 2			

This reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. We reserve every right. In particular, we reserve the right to take legal action against you in court.