



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.98 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.24 ohms max.
INDUCTANCE	1-2 10kHz, 200mVAC, 1s	1.08mH ±10%
INDUCTANCE	1-2 10kHz, 200mVAC, 1.6ADC, 1s	800µH min.
DIELECTRIC	1-9 tie(3+4),400VAC, 1 second	-
DIELECTRIC	1-5 1800VAC, 1 second	-
TURNS RATIO	(1-2):(4-5)	2.023:1, ±2%
TURNS RATIO	(1-2):(6-9)	4.047:1, ±2%

PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED #026(10) [1.71] .100/.150 * [2.54/3.81] 60 -A- DOT LOCATES TERM. #1 .535 MAX. [13.59] 66 * DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

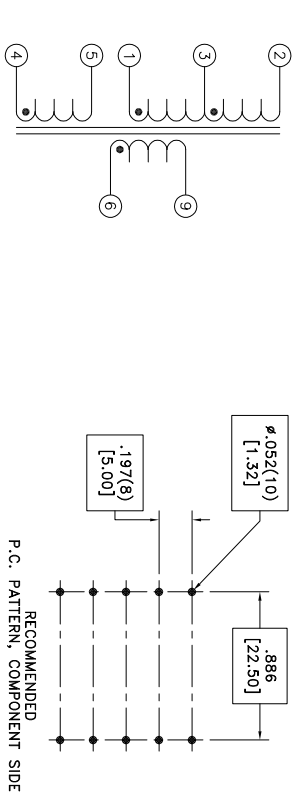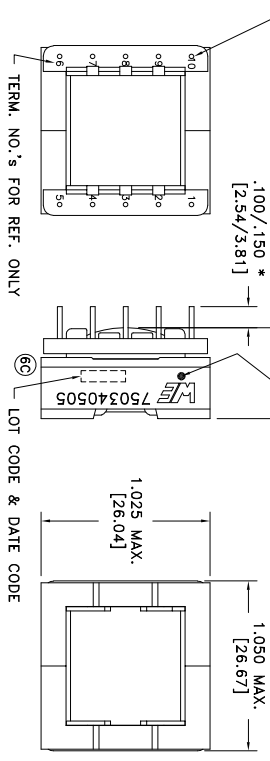

66 Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVERSION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.003 Footprint: ±.001 [0.3]	DRAWING TITLE	PART NO.
6D	5/19	Method: Tray PKG-0029			TRANSFORMER	750340505
6C	11/15	www.we-online.com/midcom				SPECIFICATION SHEET 1 OF 1
6B	7/11					
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	e1Sos p/n: 750340505	

