




**213810**  
**SBT-F-GYR-R50-3B-B5**  
**Signal column**

- Status display 360°
- Good signal effect thanks to state-of-the art, efficient LEDs
- Low energy consumption
- Immediately usable, direct predefined segment activation
- Simple installation (M30 threading)
- Assembly accessories optionally available
- Buzzer

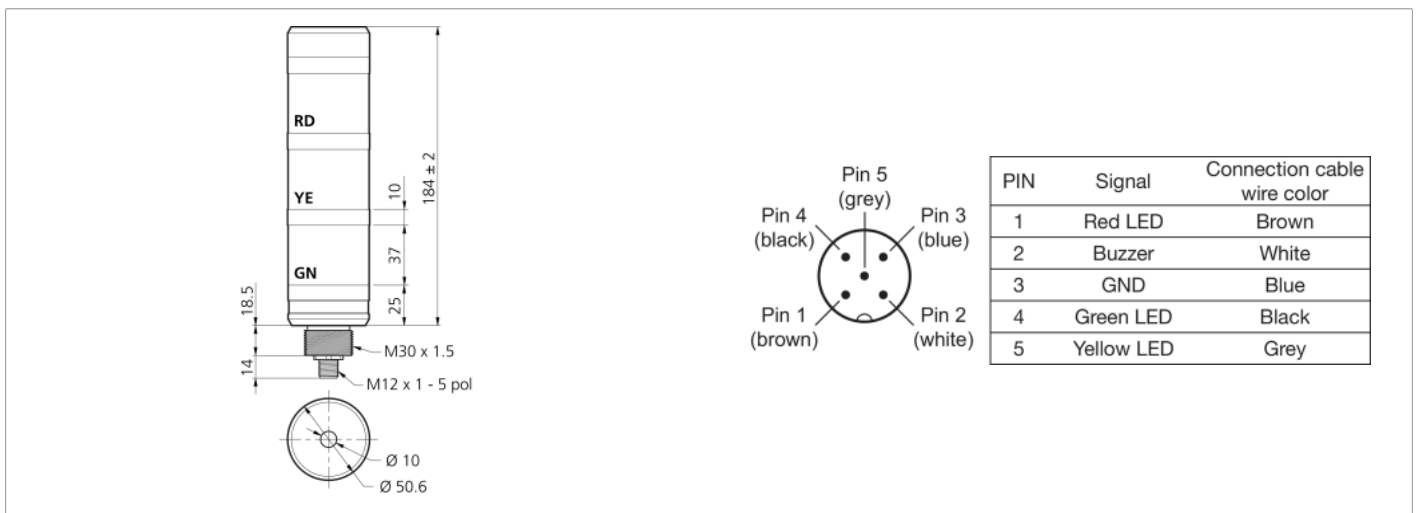

| Function |  |  |  |  |  |  |  |  |  |  |  |  |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|
|          |  |  |  |  |  |  |  |  |  |  |  |  |

| Technical data (typ.)                | +20°C, 24 V DC                           |
|--------------------------------------|--|
| Service voltage                      | 24 V DC (Supply Class 2)                 |
| Internal power consumption           | 160 mA (24 V DC)                         |
| Power                                | 3,8 W (24 V)                             |
| Inverse polarity protection          | Yes                                      |
| Illuminated area                     | 50 x 37 mm (Ø x H / segment)             |
| Number of segments                   | 3  |
| Housing material                     | Aluminum (natural, Anodized)             |
| Material                             | Polycarbonate (Diffusor)                 |
| Weight                               | 310 g                                    |
| Protection class                     | III, operation on protective low voltage |
| Model                                | Signal column                            |
| Buzzer                               | Yes, 95 (dB(A) typ. @ 50 cm)             |
| Color selection                      | Red, green, yellow                       |
| Number of inputs/outputs             | 4/0                                      |
| Level (Hi/Lo) inputs                 | 24V / 0V                                 |
| Color                                | Red, green, yellow                       |
| Vibration load                       | 10 ... 55 Hz / 0,35 mm                   |
| Ambient temperature during operation | 0 ... +50 °C                             |
| Protection type                      | IP 20                                    |
| Connection                           | Connector, M12, 5-pin                    |
| Connection cable                     | VK ... /5-SB                             |



**213810**  
**SBT-F-GYR-R50-3B-B5**  
**Signal column**

[More information / accessories](#)

<https://www.di-soric.com/213810>