

COIL: @ +25° C.


RESISTANCE 1250 $\Omega$  ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.0 VDC

MUST RELEASE 1.5 VDC

CUSTOMER DATA SHEET

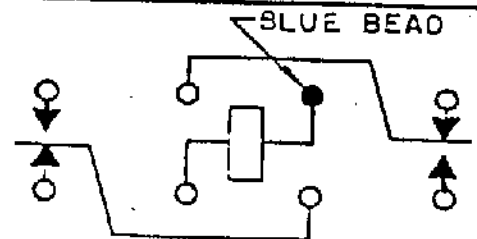

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS AT 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO  
2 AMPS @ 28 VDC RESISTIVE  
100,000 OPERATIONS

NOTES:

DR 2/22/85

CK. OSW



Communications  
Instruments, Inc.

CUST. CII STANDARD

CUST. NO. \_\_\_\_\_

TYPE "HF" RELAY

HF1201D00