



A Product Line of **Diodes Incorporated**

LITE-ON SEMICONDUCTOR

G30H120CTFW

TRENCH SCHOTTKY RECTIFIER	REVERSE VOLTAGE – 120 Volts FORWARD CURRENT – 30 Amperes					
FEATURES • High junction temperature capability		<u>ITO-220</u>	(S)AB			
 Negligible switching losses Good trade off between leakage current and forward 			ľ	TO-220(S)A	В	
	B	<u>M</u>	DIM	MIN	MAX	
voltage drop Qualification is according to AEC-Q101Rev_D 			Α	14.95	15.95	
Lead-Free Finish; RoHS Compliant (Notes 1 & 2)	ч (т		В	10.00	10.40	
			С	2.76	3.36	
 Halogen and Antimony Free. "Green" Device (Note 3) 	4 4		D	8.50	8.80	
			E	2.10	2.50	
	PIN	4	F	13.00 1.15	13.70 1.37	
APPLICATION	1 2 3		H	2.40	2.70	
 High frequency miniature switch mode of adaptors 		-		0.50	0.80	
 On-board DC-DC converters 		I	J	0.45	0.70	
 Use in high frequency inverters 	<u> </u>	5.	ĸ	3.00	3.30	
			L	4.46	4.87	
MECHANICAL DATA	L		M	2.48	2.80	
Package: JEDEC TO-220ABFP		+ <u>N</u> +	Ν	2.50	2.80	
 Package Material: "Green" Molding compound, UL flammability classification 94V-0, "Halogen-free". 			All dime	ension in m	illimeter	
Lead free finish, RoHS compliant	PIN 1	▶┤─┐				
Polarity : As marked on body	PIN 3	PIN 2				
Marking code: G30H120CTFW						
Weight: 0.05 ounces, 1.558 grams (Approximate)						
MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTI	CS					

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER			SYMBOL	VALUE		UNIT
Maximum repetitive peak reverse voltage			V _{RRM}	120		V
Maximum DC blocking voltage			V _{DC}	120		V
Maximum Average rectified forward current @Tc = 85°C		I _{AV}	30		٨	
Non repetitive peak reverse current @tp=2us		I _{RSM}	3		Α	
Peak forward surge 8.3ms single half sine-wave superimposed on rated load			I _{FSM}	280		А
Operating Junction and Storage temperature range			T _J , T _{STG}	-55 ~ +175		°C
STATIC ELECTRICAL	CHARACTER	ISTICS	-			
PARAMETER	TEST C	ONDITION	SYMBOL	ТҮР	MAX	UNIT
Forward voltage (Note 4)	I _F = 15A	T _J = 25°C T _J = 125°C	V _F	 0.67	0.84	V
Reverse leakage current	V _R = 120V	$T_J = 25^{\circ}C$ $T_J = 125^{\circ}C$	I _R	 0.8	5 5	uA mA
Typical junction capacitance (Note 5)		CJ	1000		pF	
THERMAL CHARACT	ERISTICS					
PARAMETER		SYMBOL	ТҮР		UNIT	
Typical thermal resistance (Note 6,7)		RthJ _∟ RthJ _c	5 4		°C/W	

Note:

1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.

2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony

compounds.

300us pulse width, 2% duty cycle.
 Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

6. Thermal resistance test performed in accordance with JESD-51.
7. The unit mounted on Aluminum plate 30mm x 40mm x 1.62mm and Copper heatsink 200mm x 200mm x 5mm in free air condition.



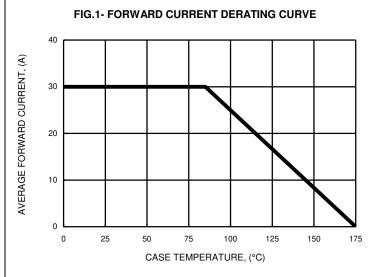


FIG.3- TYPICAL FORWARD CHARACTERISTICS



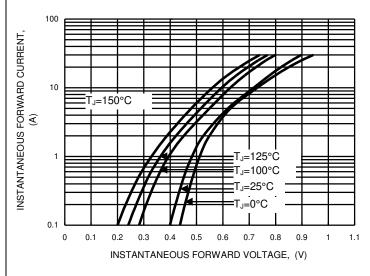



FIG.5- TYPICAL REVERSE CHARACTERISTICS



G30H120CTFW Document number: DS44944 Rev. 2 - 2

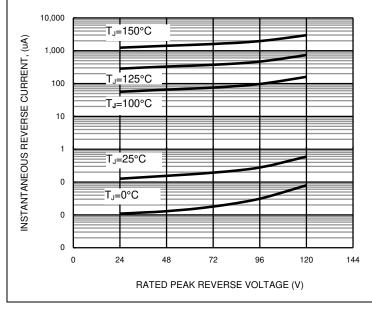

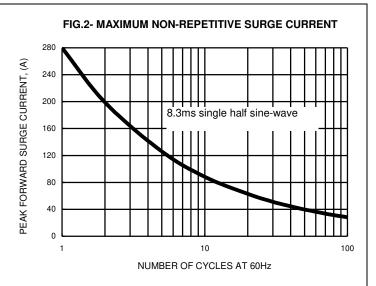

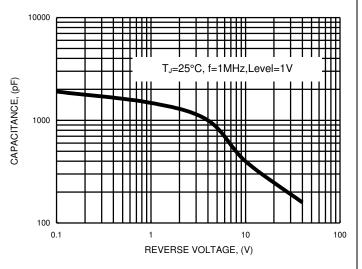





Ordering Information:

ſ	Part Number	Package	Packing		
	Fait Nulliber	Fackage	Qty.	Carrier	
	G30H120CTFW	ITO-220(S)AB	50pcs	Tube	

Marking information:

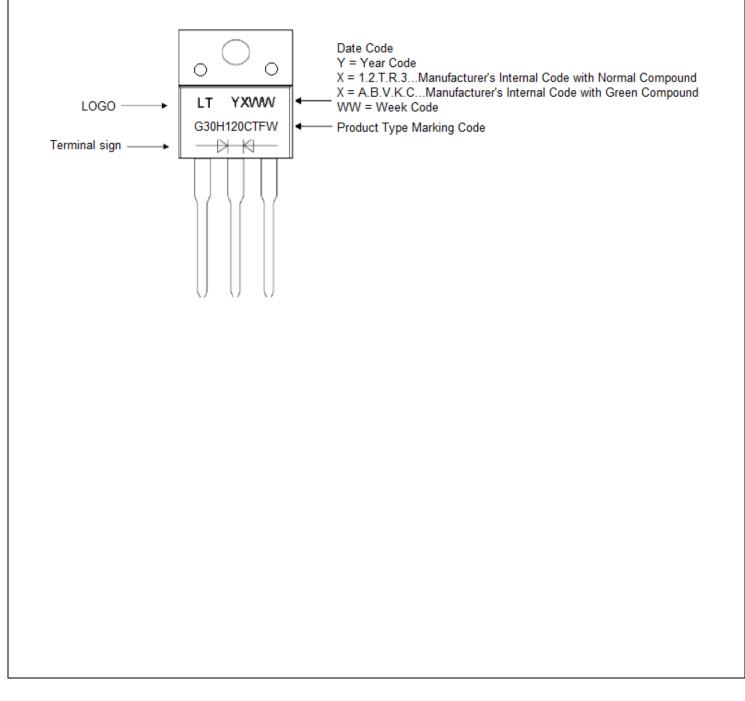




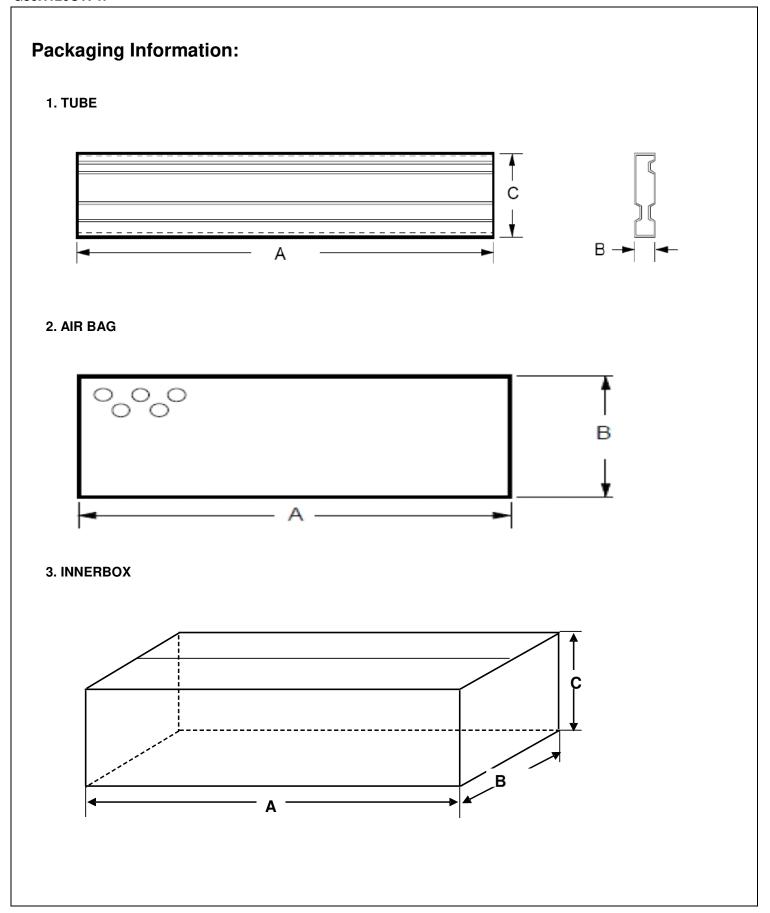



Packaging Information (continued):

4. CARTON

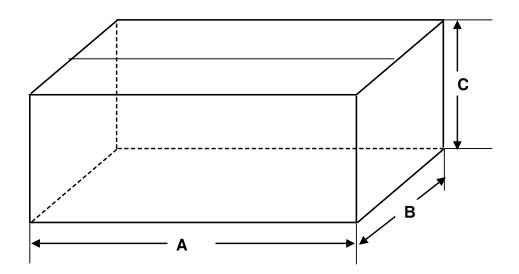

Unit: mm

P/N	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	Q'ty/per	REMARK
TUBE	536	5.6	31.8	50	/
AIR BAG	800	550	/	/	/
INNERBOX	555	165	105	2000	40TUBE
CARTON	575	179	225	4K	2 INNER BOX



IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.

3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.

4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.

subject 5. provided Diodes' Standard Conditions Diodes' products are to Terms and of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.

7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.

8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

9. This Notice may be periodically updated with the most recent version available at https://www.diodes.com/about/company/terms-and-conditions/important-notice

DIODES is a trademark of Diodes Incorporated in the United States and other countries. The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries. © 2022 Diodes Incorporated. All Rights Reserved.

www.diodes.com