


# FLKM HDSUB-26/F

Order No.: 5528341

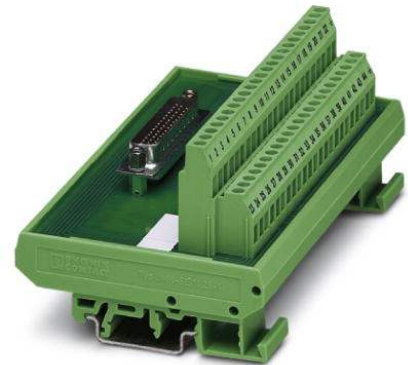


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5528341>

VARIOFACE module, with screw connection and high density D-Subminiature female connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 26, width: 79 mm



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Commercial data

GTIN (EAN)	 4 017918 900816
sales group	I011
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 253 (IF-2007)

## Technical data

### General data

Nominal voltage $U_N$	125 V
Max. current carrying capacity per branch	1 A
Number of positions	26
Width	79 mm
Height	77 mm
Depth	58 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Mounting position	Any
<b>Connection data</b>	
Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Number of positions	26
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

**Certificates / Approvals**




Certification

CUL, UL


**Diagrams/Drawings**

Circuit diagram

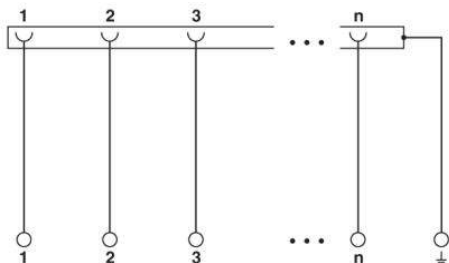

Schematic diagram

---

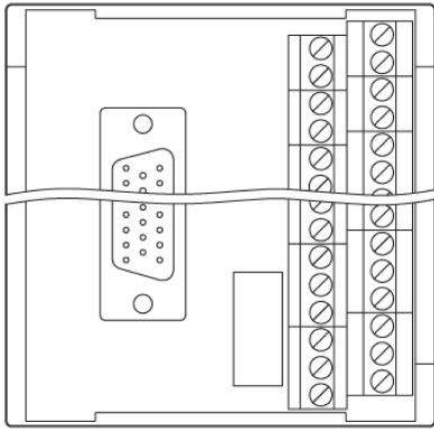

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;