


## HC-B 24-TMB-100/O1STM40G-STA

Order No.: 1604599

The illustration shows the version HC-B 24-TMB-100/O1STM32S-STA

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604599>

HEAVYCON ADVANCE standard powder-coated sleeve housing B24,  
with bayonet locking, height 100 mm, with 1x M40 thread, straight  
cable outlet

Commercial data	
GTIN (EAN)	 4 017918 948276
sales group	D201
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 475 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
03/01/2006

[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Note	For contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
Design	B24
Height	100 mm
Width	57 mm

Length	152 mm
Housing type	Sleeve housings
Locking type	Bayonet locking
Cable exit	Straight
Type of the screw connection	1x M40
Degree of protection	IP65/67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel
Material grip body interlock	PA-GF
Length of the assembly cutout	112 mm
Width of the assembly cutout	35 mm

#### Accessories

Item	Designation	Description
------	-------------	-------------

#### Assembly


1604641	HC-B-BF	Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking
---------	---------	---

#### General

1690969	HC-B 24-TMB-SD-IP65	HEAVYCON ADVANCE IP65 protective cover B24, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm
1604654	HC-B-BF-SET	Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers

## Diagrams/Drawings

### Dimensioned drawing

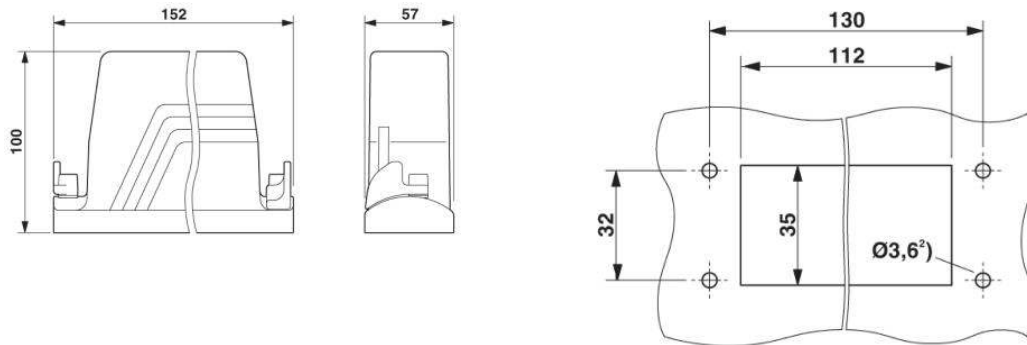

Panel cutout

<sup>2)</sup> When self-tapping Torx screws are used  
(Torx20, M4)

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;