

LOC	DIST	REVISIONS 変更					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E	REVISED	ECR-05-005079	16JUN2005	T.H	N.Y





TABLE 1

温度範囲 TEMPERATURE LIMIT	P/N 174737-1	P/N 174737-2
使用温度範囲 OPERATING TEMPERATURE LIMIT	-40°C~105°C	-40°C~60°C
保管温度範囲 STORAGE TEMPERATURE LIMIT	-40°C~50°C	-40°C~50°C
作業温度範囲 WORKING TEMPERATURE LIMIT	5°C~50°C	5°C~50°C

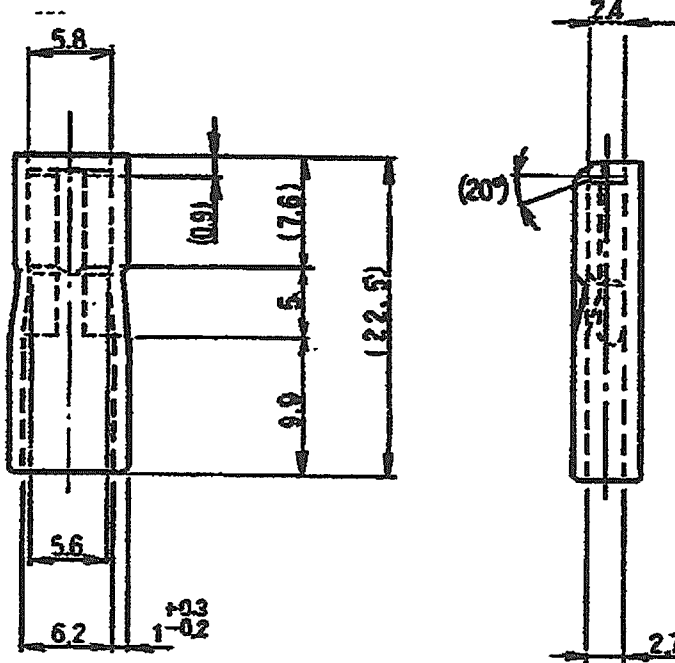

注記 ;

1. 一般公差 : ± 0.3
2. 適用コンタクト型番 : 173722, 173724
- ③ 使用温度上限 : TABLE 1 参照
4. 本製品に関する適用製品規格は用意しておりません。製品の使用に際しては、適用性について御確認の上決定下さい。

NOTES ;

1. GENERAL TOLERANCE : ± 0.3
2. APPLICABLE RECEPTACLE P/N : 173722, 173724
- ③ OPERATING TEMPERATURE UPPER LIMIT : SEE TABLE 1
4. THIS PRODUCT IS NOT PREPARED THE PRODUCT SPECIFICATION. THEREFORE, PLEASE USE THIS PRODUCT AFTER CONSIDERING THE APPLICABILITY OF THIS PRODUCT.

黄 YELLOW	PVC(軟質) PVC(SOFT) UL94V-0	174737-2
青 BLUE	PVC(軟質) PVC(SOFT) UL94V-0	174737-1
色 COLOR	材料 MATERIAL	型番 P/N

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY TYCO ELECTRONICS CORPORATION.

© COPYRIGHT

THIS DRAWING IS UNPUBLISHED.

DIMENSIONS: 単位: 精 MM	DWN	T.HATANO	100CT2002	MATERIAL 材料	SEE TABLE	FINISH 仕上		
	CHK	M.SUZUKI	100CT2002	Tyco Electronics AMP K.K. Kawasaki, Japan				
	APVD	M.SHINDO	100CT2002					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差				NAME 名称	INSULATION SLEEVE FOR 187 SERIES POSITIVE LOCK EX REC. (BACK ENTRY TYPE)		
PRODUCT SPEC 製品規格				SIZE	A4	CAGE CODE	00779	
APPLICATION SPEC 取付適用規格				DRAWING NO 番号	C-174737			
WEIGHT				RESTRICTED TO				-
CUSTOMER DRAWING				SCALE 尺度	2:1	SHEET	1 OF 1	
				REV				E