

PRODUCT NUMBER
57102-XXX-XXXXXLF

PLATING
S = 0.38µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
G = 0.76µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
F = GOLD FLASH ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL

RoHS COMPATIBLE SEE NOTE 7
POLARIZATION, SEE NOTE 6
PACKAGING, SEE NOTE 5
NB OF POSITIONS PER ROW: 02 TO 25 POS

PIN STYLE	POST LENGTH	TAIL LENGTH	OAL
02	2.00	2.50	6.00
04	2.00	3.00	6.50
06	4.00	2.50	8.00
08	4.00	3.00	8.50
09	4.80	2.50	8.80
10	6.00	3.00	10.50
12	5.71	4.37	11.58
13	8.00	2.08	11.58
14	8.07	2.52	12.09
15	6.75	1.80	10.05


1.27µm MIN NICKEL UNDERPLATING

NOTES:




- MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC
UL 94V-0, COLOR BLACK
- MATERIAL TERMINAL: COPPER ALLOY
- TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW
- 7N MIN. PIN RETENTION IN EITHER DIRECTION.
- PACKAGING:
= STANDARD PACKAGING IN POLYBAGS
- = PACKAGING POLYBAGS WHEN POLARIZATION FEATURE APPLICABLE
U = TUBE AVAILABLE FROM 03 TO 25 POS PER ROW
- FOR POLARIZATION, SPECIFIED PIN
EXAMPLE : 03 = OMIT PIN POSITION 3, SEE TOP VIEW
OMIT FROM PRODUCT NUMBER IF THIS FEATURE IS NOT APPLICABLE

7. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

- PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
- MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
- COMPATIBLE TO REFLOW PROCESS 260°C MAX
FOR 30 SECONDES
- LABELLING:
- MEETS PACKAGING SPECS AS PER GS-14-920
- LEGAL STATEMENT : SEE GS-47-0004

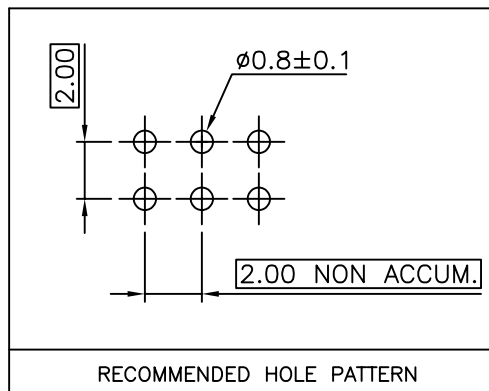

TOP VIEW

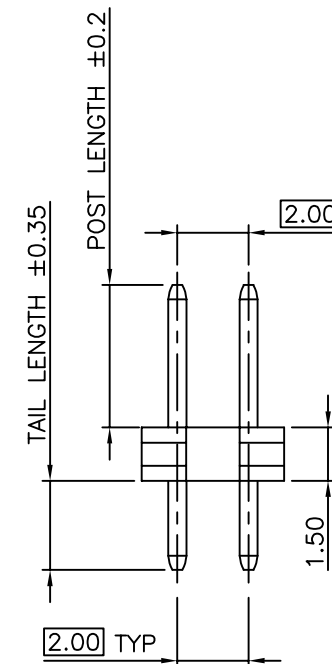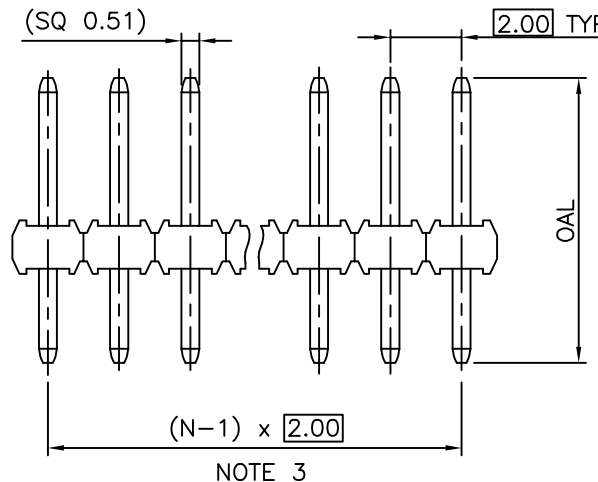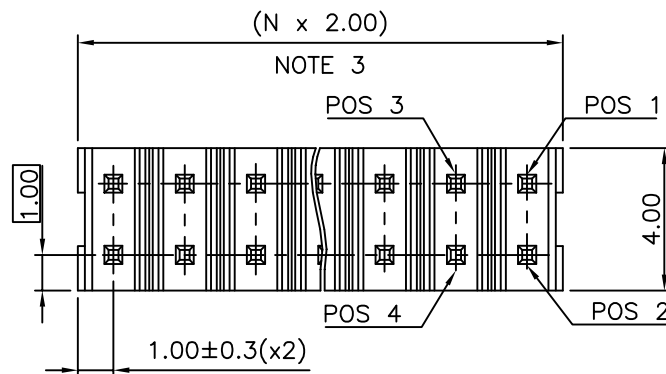

mat'l. code		surface ISO 1302	tolerance ISO 406 ISO 101	projection 101	product family MINITEK
ltr	ecn no	dr	date	title	
L	F12-0062	LMU	12.05.25	UNSH HEADER	
M	B-19190	LMU	14.10.24	2.00 mm VERTICAL TMT	
N	B-19797	AMA	14.12.16	dwg no	
P	B-19988	LMU	15.01.13	sheet 1 of 1	
R	F-46840	DDE	22.12.21	size	
sheet index		revision sheet	type		A3
index		sheet	CUSTOMER Drawing		