


Specification Control Drawing


Raychem

a) Part as supplied

202W232

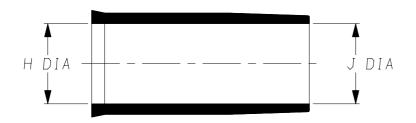

b) Part after unrestricted recovery

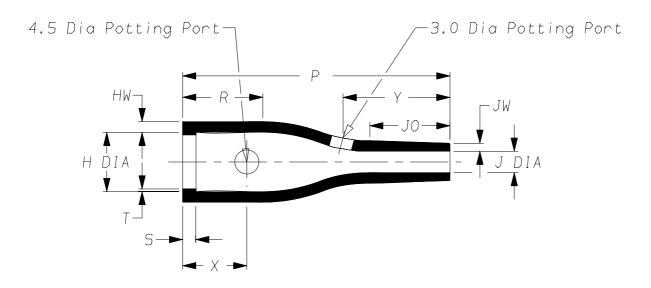

DIMENSIONS in millimetres (in inches, for reference)

	H	+	_	J	P	R	S	T	JO	HW	JW	X	Υ
Part No.	Min	Max	Min	Max	±10%	Ref	±10%	±10%	Ref	±20%	±20%	±20%	±20%
	а	b	а	b	b	b	b	b	b	b	b	b	b
	15 {0.59}	11.7 {0.46}	15 {0.59}	4.3 {0.17}	50 {1.97}	15 {0.59}	2.5 {0.10}	0.5 {0.02}	15 {0.59}	2.0 {0.08}	1.5 {0.06}	12 {0.47}	20 {0.79}

Potting Port X at 90° to Potting Port Y

Copyright (!)

Approval

Design


The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

MKTG.

Q.A.

R	aychem	Specificat Control D		Part Number 202W232 Issue 4
Iss.	Date	E.C.R. No.	Deta	ails of Change
2 3 4 4	February 1988 July 1998 December 2006 December 2006		Redrawn -12 Mat	Ports added erial description name changed l dimensions added

(Ordering Information)

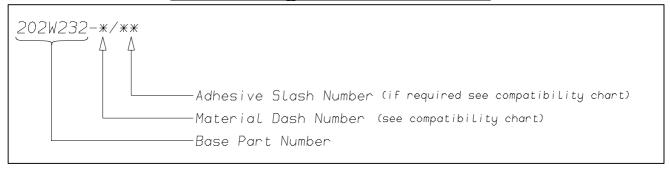

COMPATIBILITY CHART)

Material Dash Number	Material Description	SPEC Number	Coating Slash Number	
-3	POLYOLEFIN, SEMI-RIGID	RT-301, RK-6703	/42 ,/86, /180	
-4	POLYOLEFIN, FLEXIBLE	RT-1304 RT-1050	/42 ,/86, /180	
-6	SILICON	RT-602, RK-6706	N/A	
-12	FLUOROELASTOMER, FLEXIBLE	RT-1312, RW-2071	/225	
-25	ELASTOMER, FLUID RESISTANT	RT-1325, RK-6713	/42, /86, /225	
-100	ZERO HALOGEN	RT-1323, RK-6717	/86, /180	
-130	POLYOLEFIN, COMMERCIAL FLEXIBLE	RW-2008	/42	

NOTES

- 1) As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.
- 2 Potting Ports are optional, when specified by suffix "-00" they will be located as shown.

Faraday Road, Swindon, Wiltshire, SN3 5HH England	Tyco Electronics Corporation 300, Constitution Drive, Menlo Park, CA 94025 USA
Telephone: (01793) 528171 Fax: 572516	Telephone (650) 361–3860 Fax: (650) 361–5579
Cage Code K1010	Cage Code 06090