

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-11-004820	11MAR11	RK	HMR
	B3	REVISED PER ECO-18-007846	13AUG2018	RS	DR
	B4	REVISED PER ECO-18-015552	03OCT2018	RS	DR

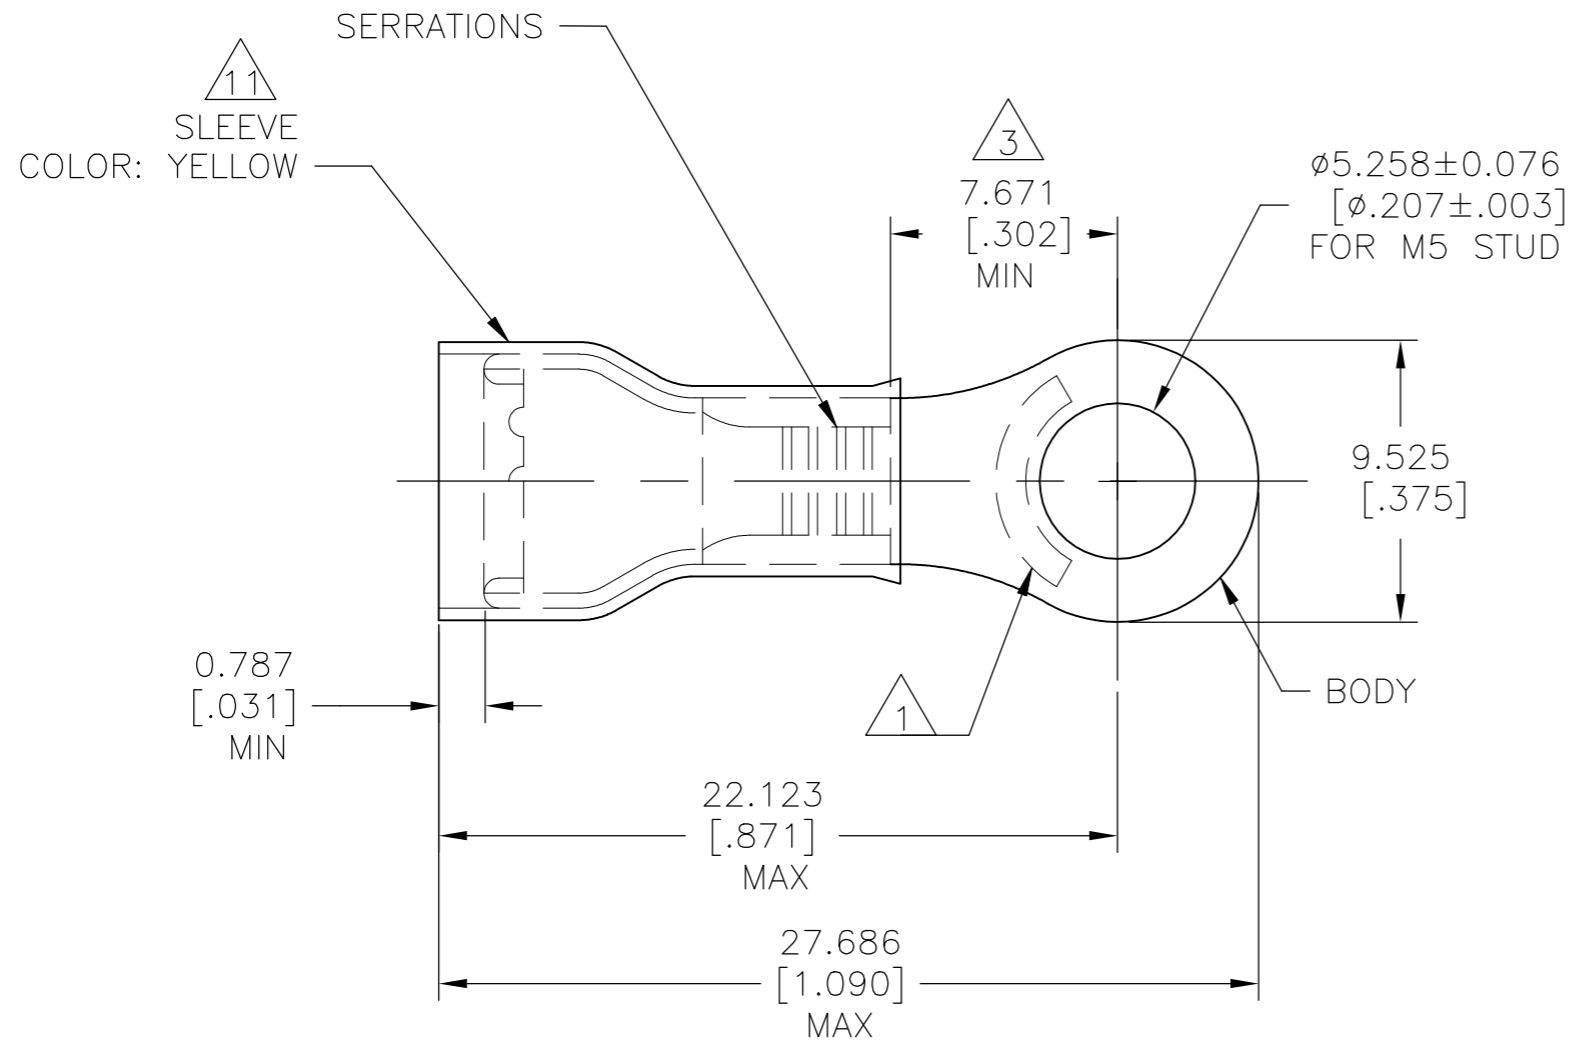

- 1 STAMP "AMP 12-10*", LOCATION APPROX AS SHOWN.
- 2 BODY MATERIAL THICKNESS IS 0.991±0.051 [.039±.002]
- 3 APPLIES FROM THE EDGE OF THE METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 4 NOTE DELETED
- 5 BODY - COPPER PER ASTM B-152
SLEEVE - COPPER PER ASTM B-152
INSULATION - NYLON
- 6 BODY - TIN PL PER ASTM B-545
SLEEVE - TIN PL PER ASTM B-545
INSULATION - COLOR - YELLOW
- 7 105°C [221°F] MAX OPERATING TEMPERATURE.
- 8 300 VOLT MAX
- 9 2.62-6.64mm² [5,180 - 13,100 CMA]
SOLID OR STRANDED
- 10 NOTE DELETED
- 11 INTERNAL EDGE FEATURE MAY BE SOLID OR SCALLOPED

.150-.250	2500	REELED ON TAPE	2-130171-1
.150-.250	500	LOOSE PIECE	130171
WIRE INSULATION OD RANGE	QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth 20FEB06	STE TE Connectivity Ltd.													
DIMENSIONS: mm [INCHES]		CHK T MICHIELUTTI 20FEB06														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHIELUTTI 20FEB06	NAME TERMINAL RING TONGUE, PIDG, WIRE SIZE 12-10 AWG													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± .008</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± 5°</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± .008	4 PLC	± -	ANGLES	± 5°	PRODUCT SPEC UL 486 A-B	SIZE A3	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± .008															
4 PLC	± -															
ANGLES	± 5°															
MATERIAL		APPLICATION SPEC 114-2157	CAGE CODE 00779	DRAWING NO 130171												
FINISH		WEIGHT -	RESTRICTED TO -													
5		CUSTOMER DRAWING		SCALE 4:1												
6		SHEET 1 OF 1		REV B4												