
—	Ω	н т	m –	<u>с</u>





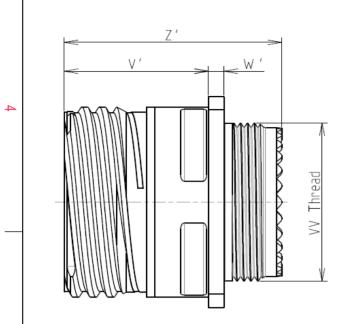

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy $0.8 \mu m$ minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 2000 hours -Salt Spray -Mass : 20.1 g ± 10%

8D 0

G

13

Μ

26

S

F

В


Dim	Nominal	
P	3.25±0.2	
PP	4.93±0.2	
R1	23.01	
R2	20.62	
S	28.6±0.3	
V'	19.5+1.4/-0	
W'	2.1/3.65	
Z'	32 Max	
V THREAD	M18x1-6g	


ORIENTATION : B

CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е



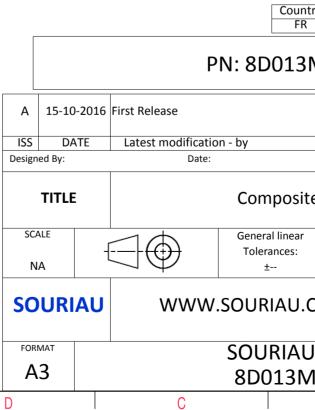

Β		A		
			4	
AS EXAMPLE			3	
any non-conformit which does not co or of the Parties or b ndation, technical n untry Jurisc FR 3M26SB	mply with by a third party	List	2	
	CUSTOMER D	MOD N°		
ite Receptacle 8D series				
ar	NPRDS / PR 859	OJECT	1	
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	1	SHEET		
M26SB-C		A 1/2		
U	I	n		

ſ	τ	Q	г	m		O
		Contact Layout				Panel Cutou
4		26			1	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		2#12 6#22D 13-26]			
cω	Ctc A B C D E F 1 2	X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
		· · · · ·	_			COUDIALI shall not be lipble for an
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						Country FR
						PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Composite
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013M
L	Н	G	F	E	D	C

