

LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Nickel
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +200°C
- Salt Spray : 2000 hours
- Mass : 17.1 g ± 10%

| Connector dimension |             |
|---------------------|-------------|
| Dim                 | Nominal     |
| P                   | 3.25±0.2    |
| PP                  | 4.39±0.2    |
| R1                  | 24.61       |
| R2                  | 23.01       |
| S                   | 31±0.3      |
| V'                  | 19.5+1.4/-0 |
| W'                  | 2.1/3.65    |
| Z'                  | 32 Max      |
| VV THREAD           | M22x1-6g    |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

|         |                             |
|---------|-----------------------------|
| Country | Jurisdiction & Control List |
| FR      | Not Listed                  |

**PN: 8D015M97AD**

|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 12-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |


**TITLE** Composite Receptacle 8D series

|       |  |                            |                 |
|-------|--|----------------------------|-----------------|
| SCALE |  | General linear Tolerances: | NPRDS / PROJECT |
| NA    |  | ±--                        | <b>859</b>      |

**SOURIAU** WWW.SOURIAU.COM

This document is the property of SOURIAU it must not be reproduced or communicated without permission

|           |                                    |  |            |
|-----------|------------------------------------|--|------------|
| FORMAT    | <b>SOURIAU DRG N° 8D015M97AD-C</b> |  | SHEET      |
| <b>A3</b> |                                    |  | <b>1/2</b> |

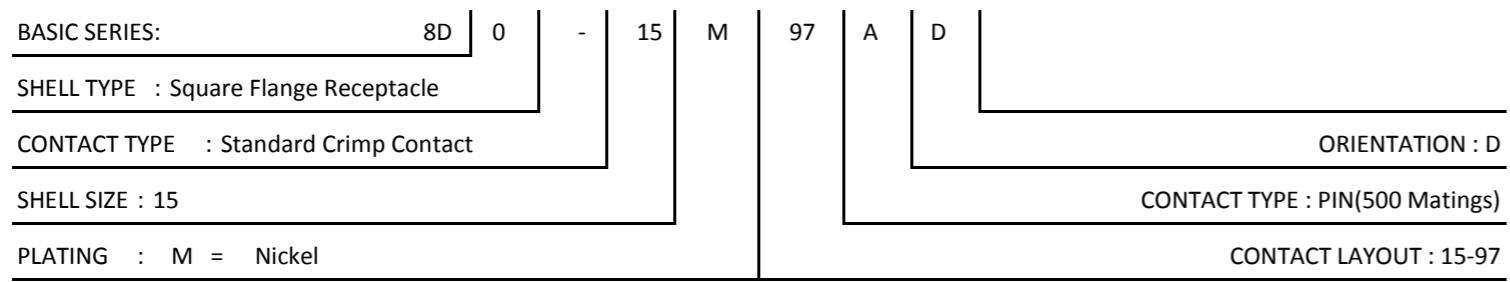

Contacts Layout



| Contact position ID | Location    |             | Contact position ID | Location    |             |
|---------------------|-------------|-------------|---------------------|-------------|-------------|
|                     | X-axis (mm) | Y-axis (mm) |                     | X-axis (mm) | Y-axis (mm) |
| A                   | +065 (1.65) | +234 (5.94) | G                   | -207 (5.26) | -095 (2.41) |
| B                   | +178 (4.52) | +178 (4.52) | H                   | -234 (5.94) | +065 (1.65) |
| C                   | +230 (5.84) | -023 (0.58) | J                   | -178 (4.52) | +178 (4.52) |
| D                   | +178 (4.52) | -178 (4.52) | K                   | -065 (1.65) | +234 (5.94) |
| E                   | +065 (1.65) | -234 (5.94) | L                   | -047 (1.19) | +081 (2.06) |
| F                   | -089 (2.26) | -235 (5.97) | M                   | +047 (1.19) | -081 (2.06) |

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location         | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|--------------------------|------------|
| 15         | -97             | 4<br>8             | 16<br>20      | I              | C, G, L, M<br>All others | MS20052-97 |

Panel Cutout



| Dim | Nominal    |
|-----|------------|
| ØA  | 26.59 min  |
| ØAA | 23.01 min  |
| R1  | 24.61      |
| ØT  | 3.25 ±0.13 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D015M97AD

|                |                                       |                            |   |
|----------------|---------------------------------------|----------------------------|---|
| A              | 12-10-2016                            | First Release              |   |
| ISS            | DATE                                  | Latest modification - by   | MOD N°  |
| Designed By:   |                                       | Date:                      | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | <b>Composite Receptacle 8D series</b> |                            |   |
| SCALE          |                                       | General linear Tolerances: | NPRDS / PROJECT   |
| NA             |                                       | ±--                        | <b>859</b>  |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>                |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D015M97AD-C</b>    |                            | SHEET 2/2   |