
—	G	П	m	D	0





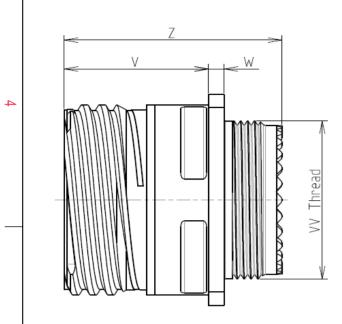

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_∶ -65°C to +175°C			
-Salt Spray	: 500 hours			

: 14.95 g ± 10%

8D 0

G

11

W

01

В


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

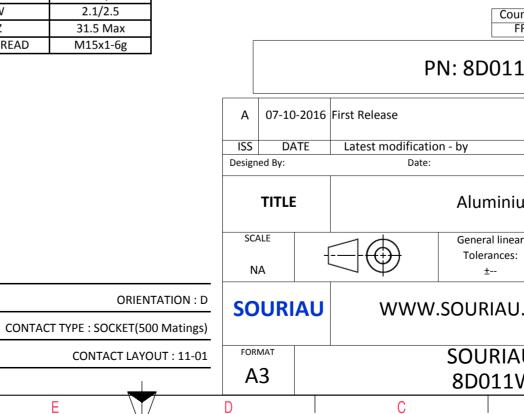

	σ		A			
					4	
S EXA	AMPLE				3	
s whic er of t	non-conformit ch does not co he Parties or t on, technical n Jurisd	mply with by a third part			2	
1W01BD						
				MOD N°		
		CUSTOME	R DRAWING			
um	m Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
	U DRG N° SHEET			-		
W0	1BD-C	I		1/2	J	
	В		А			

		G	ار (m		0
		Contact Layout				Panel Cutout
4		01			ţ.	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01	1		¥ 	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D011W
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011W0
	H	G	F	E	D	C

