





SC52LC



## SMD POWER INDUCTORS

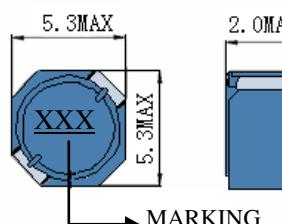

- Features
    - 1. Magnetically shielded construction
    - 2. Excellent Power Density
    - 3. Engineered to Provide High Efficiency

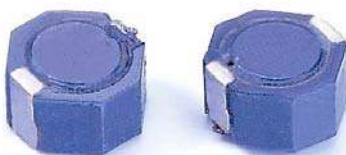

## ELECTRICAL CHARACTERISTICS

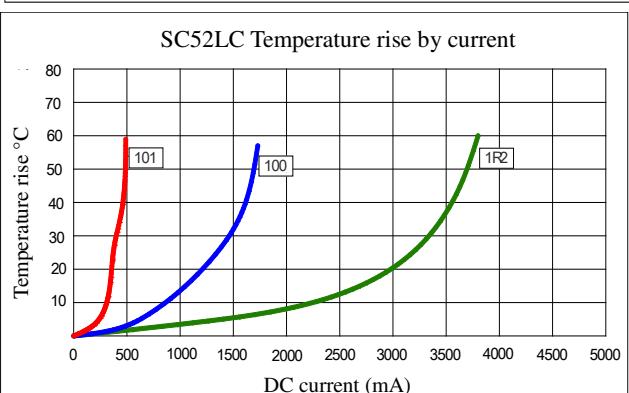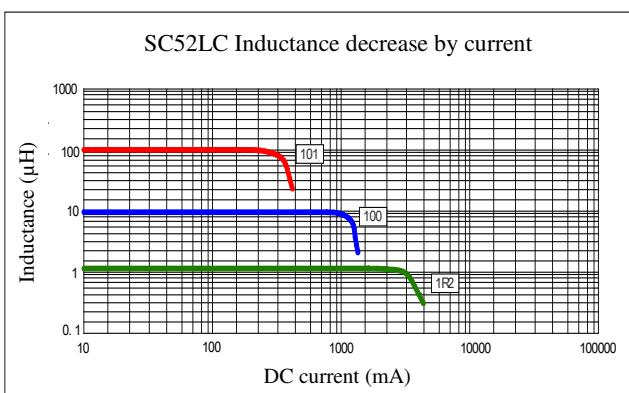

(1). Inductance tolerance for 1.2uH~6.8uH:  $\pm 30\%$ , for 10uH~100uH:  $\pm 20\%$ . Tested at 0.25V, 0ADC and 25°C

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 30% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

**Custom versions available upon request.**

© 2019 Signal Transformer –Specification subject to change without notice. 12.19

