


155364

NUMBLR
NUMERO

THAN 3/16 PERSONNEL WITHOUT WRITTEN AUTHORIZATION. THIS AMP. DE MEXICO, S.A. ESTÁ INFORMACION ES CONFIDENCIAL Y SI LE REVELA BAJO LA CONDICION DE QUE UD. NO LA MUESTRE A NINGUNA OTRA PERSONA QUE NO SEA PERSONAL DE AMP. SIN AUTORIZACION ESCRITA DE AMP DE MEXICO, S.A.

DO NOT SCALE PRINT
DIMENSIONES EN PULGADAS MILIMETROS
NO USE ESCALAS DENTRO DEL DIBUJO.

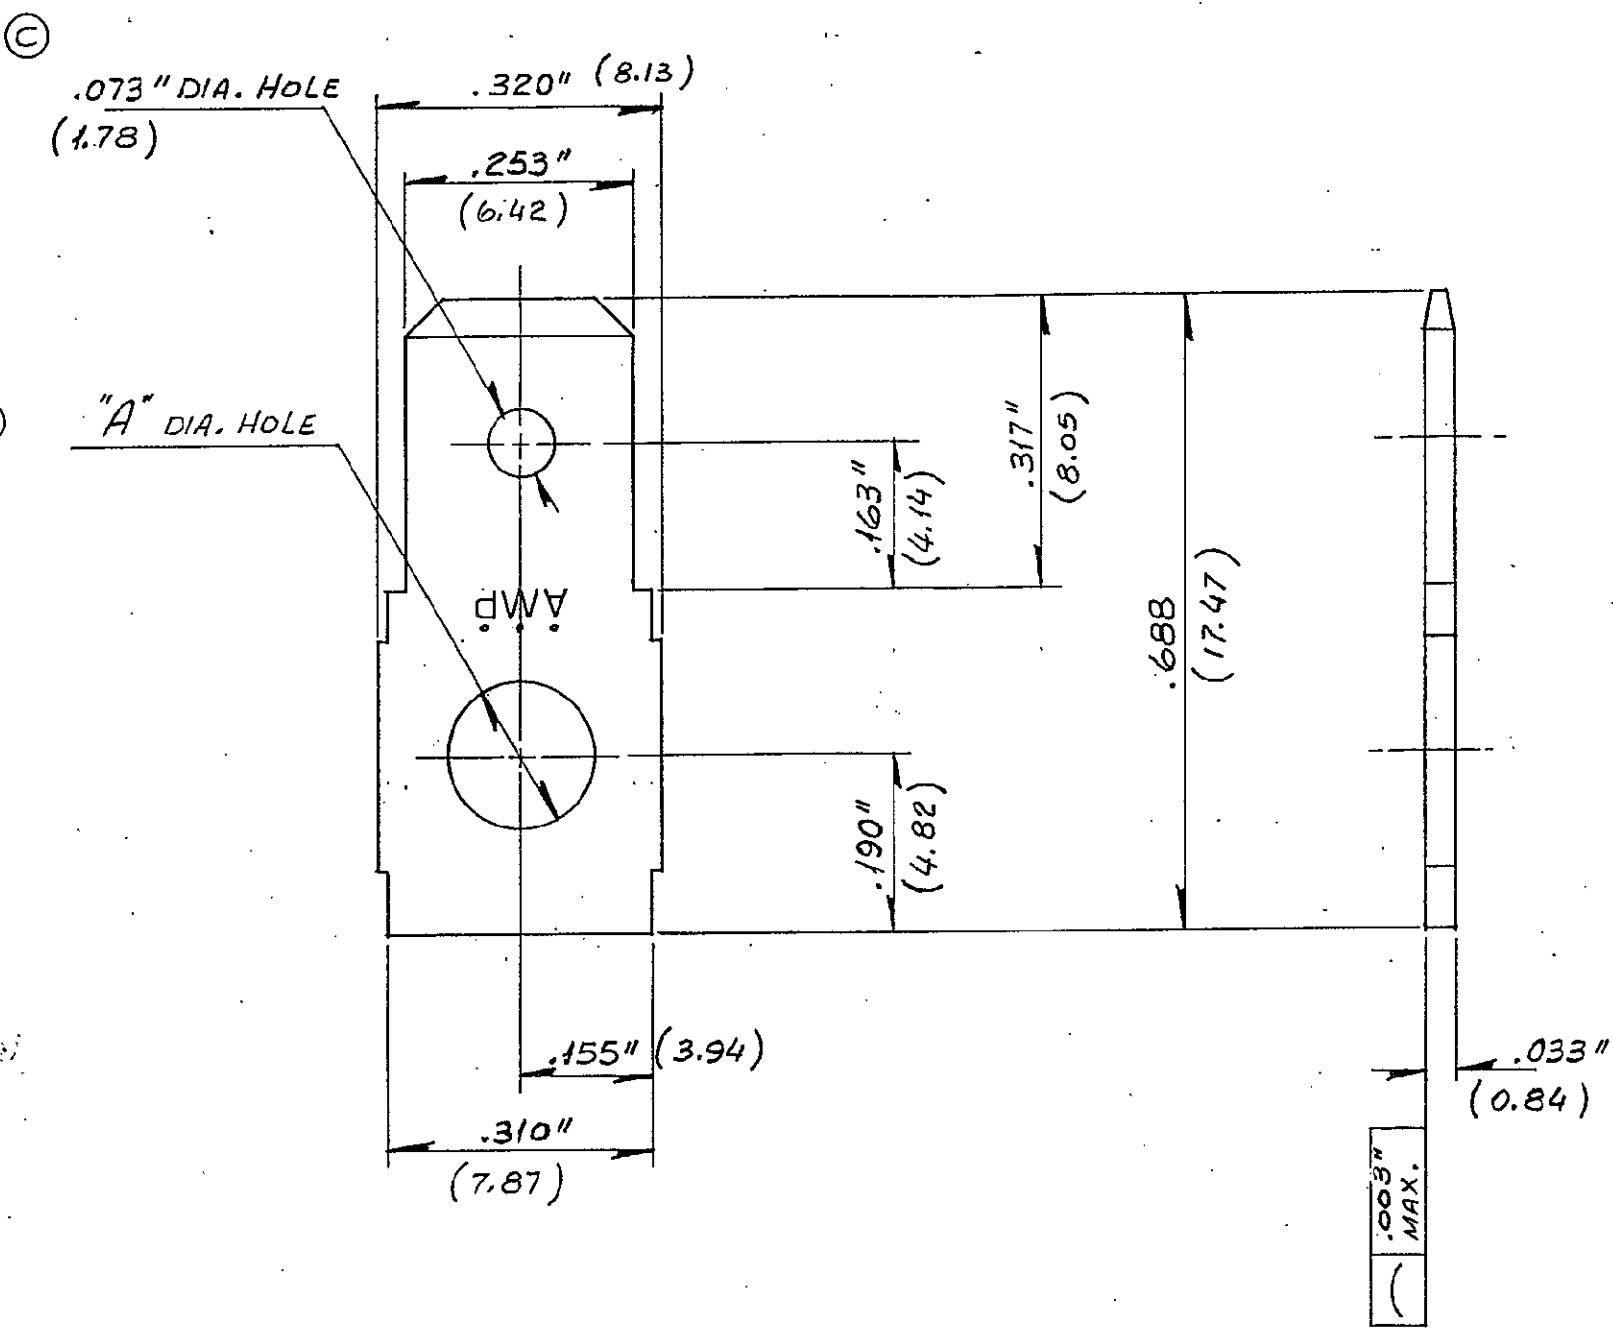

NOTES :
I. — DIMENSIONS WITH MAX. TOLERANCES.
(DIMENSIONES CON TOLERANCIAS MAXIMAS.)

E	5.31 - 5.41	.209 - .213	TIN PLATED (ESTANADO)	BRASS (LATON)	155364-4
	5.31 - 5.41	.209 - .213	—	—	155364-3
	4.04 - 4.19	.159 - .165	TIN PLATED (ESTANADO)	BRASS (LATON)	155364-2
	4.04 - 4.19	.159 - .165	—	—	155364-1
	EQUIV. mm.	DIM. "A"	FINISH TERMINADO	MATERIAL	AMP PART NUMBER PIEZA NO.

REV	NO	DESCRIPTION	DATE	BY
E	4	DIM. .209" ADDED	10-80	AMP
D	3	DIM. .159 ADDED	6-77	AMP
C	2	.073 WAS .070	1978	AMP
B	2	DIM. .688 WAS .692	10-77	AMP
A	1	REDRAWN WITH CHANGES	10-77	AMP

DIRECTION OFF TOP OF REEL POSICION DE ENROLLADO PARA EL EXTREMO QUE VA AL CARRETE				WIRE CRIMP —	INS CRIMP —	SB. —	STOCK THK ESP MAT — X —	WIDE ANCHO —	WIRE RANGE RANGO DEL CONDUCTOR —	AMP de México, S. A.	
LAYOUT NO. —				SURFACE AREA SUPERFICIE SQ IN. PULG ²		TRIMMING BURR NOT TO EXCEED REBABA NO EXEDA DE .003 IN. PULG.		INSULATION RANGE RANGO DEL AISLANTE —			
DIE TROQUEL —				QTY/REEL CANT/CARR —		DIBUJO PARA CLIENTES DR. A. RUIZ R. 26 JULY 77 APP. [Signature] 27.77 CHK. [Signature] 27.77 REL. [Signature]				NAME NOMBRE: FLAT SINGLE .250" SERIES FASTON-TAB	
HEAT TREAT TRATAMIENTO TERMICO —				WDW DESA —						IDW DESR —	
DIE FEED —				PASO DEL TROQUEL —	APPL FEED —	PASO DEL APL —	NUMBER NUMERO 155364				