
PROPRIETARY INFORMATION: PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION									
REV	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE, RFS. 18951, EM	06/29/10	HM						

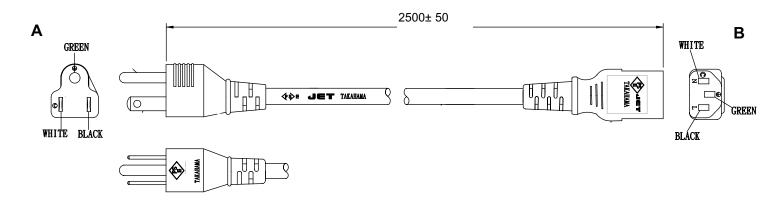

GENERAL SPECIFICATIONS:

RATING: 15A / 125V AC

CABLE TYPE / SIZE: HVCTF 3 x 2.0 MM²

TEMPERATURE RATING: 105° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK

OVERALL LENGTH (L): $2500 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER: $8.6 \pm 0.15 \text{ mm}$

END 'A' PLUG; JAPAN JIS 8303 / 3 PINS

END 'B'

APPROVALS PLUG:

APPROVALS CABLE:


APPROVALS CONNECTOR:

MITI or PSE

MITI or PSE

PACKING:

HANKING





NOTES:

Contents of this document

prior notice

are subject to change without

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Foot Note:

Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

itation of Use:

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH NO.	PART NO	REV.	DESCRIPTION		NOTES				
TABULATION BLOCK									
		TOLE DECIMA .xx +/- (0.1 +/- 1° .005			rthvale, NJ 07647 Fax 201.784.0111			
INIT.BY:	EM DATE: 06/29/10	MILLIMET .xx +/- 0 .xxx +/0	1.3 +/- 1°	DWG TITLE: JAPANESE DETACHABLE CORDSET					
DRAWN	: NF DATE: 06/29/10	FSCN N G, CC	o.: SIZE A			REV. A			
APRVD:	HM DATE: SCALE: NONE 06/29/10		E: NONE	PART NO: 3003068F2701-HK(R)		SHEET 1/1			