

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012065	NEW MINI FIT CONN HOUSING 555706R210	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	6	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A5	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A6	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

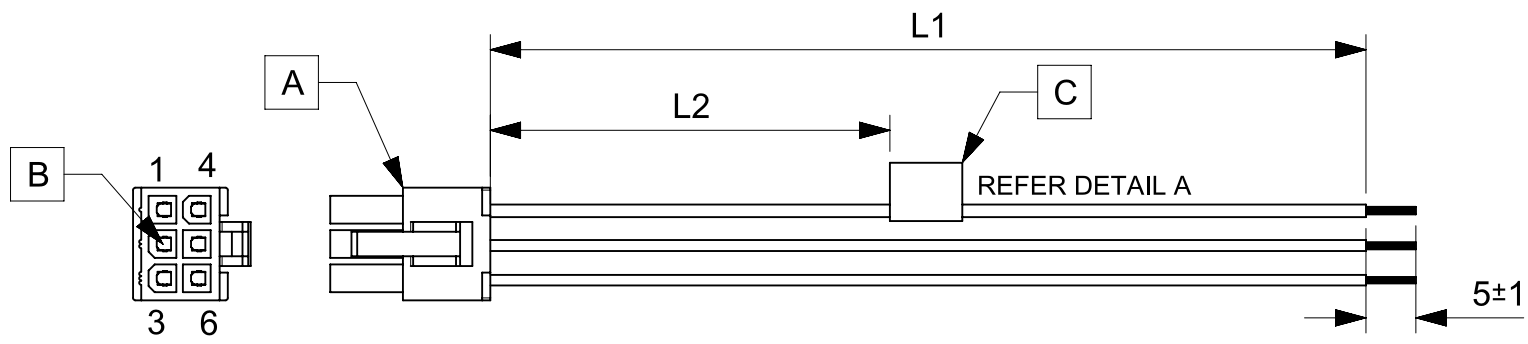


TABLE			
PART NUMBER	L1	L2	TITLE
2153261061	150±8	63 REF	MINIFIT JR DR R-S 6 CIRCUIT 150MM Sn
2153261062	300±10	138 REF	MINIFIT JR DR R-S 6 CIRCUIT 300MM Sn
2153261063	600±10	288 REF	MINIFIT JR DR R-S 6 CIRCUIT 600MM Sn

- NOTES**
1. Connector view shown is from mating side.
  2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
  3. Label text must be 2mm max. in height with Arial font.
  4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/19	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	DIMENSION UNITS: <b>mm</b> SCALE: <b>NTS</b>		CURRENT REV DESC:			
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 638379 DRWN: ARAJU    2020/03/19 CHK'D: RDESAI01    2020/05/28 APPR: RDESAI01    2020/05/28				
	ANGULAR TOL ± °		INITIAL REVISION: DRWN: ARAJU    2020/03/19 APPR: RDESAI01    2020/05/28				
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: <b>2153261061</b> DOC TYPE: PSD    DOC PART: 000    REVISION: A				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: <b>A4-SIZE</b>	SERIES: <b>215326</b>	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET	SHEET NUMBER: 1 OF 1