

Surge protection device - PT-IQ-4X1+F-5DC-UT - 2801216

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection, consisting of protective plug and base element, with integrated multi-stage status indicator on the module for four signal wires with common reference potential. Indirect grounding via gas-filled surge arrester.

The figure shows the PT-IQ-2x2-24DC-UT version



Key commercial data

| | |
|----------------------|----------|
| Packing unit | 1 pc |
| Custom tariff number | 85363010 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|------------------|---------|
| Height | 91.1 mm |
| Width | 17.7 mm |
| Depth | 77.5 mm |
| Horizontal pitch | 1 Div. |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Degree of protection | IP20 |

General

| | |
|---|--------|
| Housing material | PA 6.6 |
| Inflammability class according to UL 94 | V0 |
| Color | black |

Surge protection device - PT-IQ-4X1+F-5DC-UT - 2801216

Technical data

General

| | |
|---------------------|--|
| Mounting type | DIN rail mounting |
| Type | DIN rail module, two-section, divisible |
| Direction of action | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |

Protective circuit

| | |
|--|----------------------------------|
| IEC test classification | C1 |
| | C2 |
| | C3 |
| | D1 |
| Nominal voltage U_N | 5 V |
| Maximum continuous voltage U_C | 6 V DC |
| | 4 V AC |
| Nominal current I_N | 700 mA (50 °C) |
| Operating effective current I_C at U_C | ≤ 2 mA (per path) |
| Residual current I_{PE} | ≤ 1 μ A |
| Nominal discharge current I_n (8/20) μ s (Core-Earth) | 10 kA |
| Total surge current (8/20) μ s | 20 kA |
| Impulse discharge current (10/350) μ s, peak value I_{imp} | 2.5 kA |
| Voltage protection level U_p (core-ground) | ≤ 720 V (C1 - 1 kV/500 A) |
| | ≤ 870 V (C2 - 10 kV / 5 kA) |
| | ≤ 1000 V (C3 - 25 A) |
| | ≤ 950 V (C3 - 50 A) |
| Voltage protection level U_p (core-GND) | ≤ 120 V (C1 - 1 kV/500 A) |
| | ≤ 150 V (C2 - 10 kV / 5 kA) |
| | ≤ 25 V (C3 - 25 A) |
| | ≤ 25 V (C3 - 50 A) |
| Response time t_A (Core-Earth) | ≤ 1 ns |
| | ≤ 100 ns |
| Input attenuation a_E , asym. | typ. 0.3 dB (≤ 45 kHz) |
| Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ohm system | typ. 300 kHz |
| Capacity (Core-Earth) | 7.5 nF |
| Resistance in series | 1.2 Ω ± 5 % |
| Surge protection fault message | Optical, multi-stage |
| Max. required back-up fuse | 800 mA (FF) |
| Impulse durability (conductor-ground) | C1 (1 kV / 500 A) |
| | C2 (10 kV / 5 kA) |
| | C2 (10 kA) |

Surge protection device - PT-IQ-4X1+F-5DC-UT - 2801216

Technical data

Protective circuit

| | |
|---|-----------------|
| | C3 (25 A) |
| | C3 (50 A) |
| | D1 - 2,5 kA |
| Impulse durability (conductor-GND) | C1 - 1 kV/500 A |
| | C2 - 10 kV/5 kA |
| | C2 - 10 kA |
| | C3 - 25 A |
| | C3 - 50 A |
| Pulse reset time (conductor-ground) | ≤ 10 ms |
| Pulse reset time (conductor-GND) | ≤ 10 ms |
| Overload failure mode (connector) | Mode 2 |
| Overload failure mode (GND-ground base element) | Mode 2 |

Connection data

| | |
|---------------------------------------|-----------------------|
| Connection method | Screw connection |
| Connection type IN | Screw terminal blocks |
| Connection type OUT | Screw terminal blocks |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm |
| Stripping length | 8 mm |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |

Connection, equipotential bonding

| | |
|-------------------|---|
| Connection method | NS 35 DIN rail or connection terminal block |
|-------------------|---|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130807 |

Surge protection device - PT-IQ-4X1+F-5DC-UT - 2801216

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 7.0 | 27130807 |
| eCl@ss 8.0 | 27130807 |

ETIM


| | |
|----------|----------|
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |

UNSPSC


| | |
|---------------|----------|
| UNSPSC 6.01 | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11 | 39121610 |
| UNSPSC 12.01 | 39121610 |
| UNSPSC 13.2 | 39121620 |

Drawings

Diagram

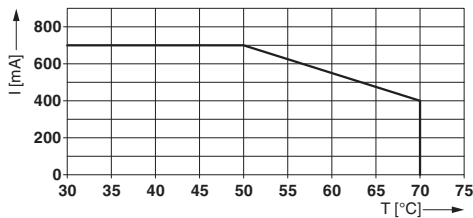

Dimensional drawing

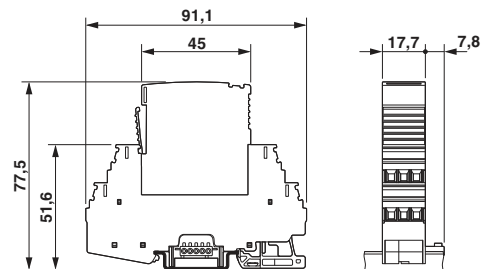

Circuit diagram

