
# 179631-1 - ACTIVE

TE Internal #: 179631-1 Housing for Female Terminals, Wire-to-Wire, 16 Position, .086 in [2.2 mm] Centerline, Natural, Signal, Panel Mount, -40 – 185 °F [-40 -85 °C]

### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings

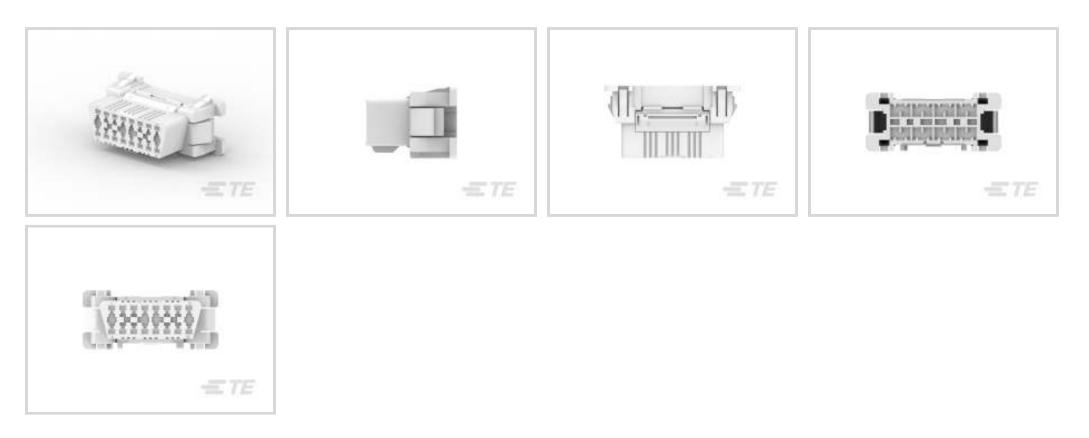

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.5 mm [.059 in ]

Connector System: Wire-to-Wire

Number of Positions: 16

Centerline (Pitch): 2.2 mm [.086 in ]

## Features

# Product Type Features



Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Configuration Features	
Number of Positions	16
Number of Rows	2
Body Features	
Cable Exit Angle	180°
Primary Product Color	Natural
Contact Features	
Contact Size	1.5mm
Contact Type	Receptacle

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 16 Position, .086 in [2.2 mm] Centerline, Natural, Signal, Panel Mount, -40 – 185 °F [-40 – 85 °C]



Mating Tab Midth	
Mating Tab Width	1.5 mm[.059 in]
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Panel Mount
lousing Features	
Housing Material	PBT
Centerline (Pitch)	2.2 mm[.086 in]
Dimensions	
Connector Height	26.2 mm[1.03 in]
Product Width	21.2 mm[.834 in]
Product Length	49.2 mm[1.93 in]
Row-to-Row Spacing	8.6 mm[.339 in]
Jsage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	50
Packaging Method	Bag
Other	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 16 Position, .086 in [2.2 mm] Centerline, Natural, Signal, Panel Mount, -40 – 185 °F [-40 – 85 °C]



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**





# Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 16 Position, .086 in [2.2 mm] Centerline, Natural, Signal, Panel Mount, -40 – 185 °F [-40 – 85 °C]







# Documents

**Product Drawings** DIAGNOSTIC PLUG HSG 16P NARU.

Japanese

# **CAD** Files **Customer View Model** ENG\_CVM\_CVM\_179631-1\_N.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_179631-1\_N.3d\_igs.zip

English

**Customer View Model** ENG\_CVM\_CVM\_179631-1\_N.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

**Product Specifications Application Specification** 

English

**Instruction Sheets** 

Instruction Sheet (U.S.)

English

Automotive On-Board Diagnostic Connector 179631-1

English

Housing for Female Terminals, Wire-to-Wire, 16 Position, .086 in [2.2 mm] Centerline, Natural, Signal, Panel Mount, -40 – 185 °F [-40 – 85 °C]

