

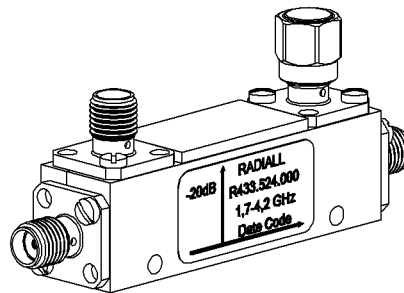


PAGE 1/2	ISSUE 06-12-19A	SERIES COUPLER	PART NUMBER R433524000
----------	-----------------	--------------------------	-------------------------------

Scale 1 : 1

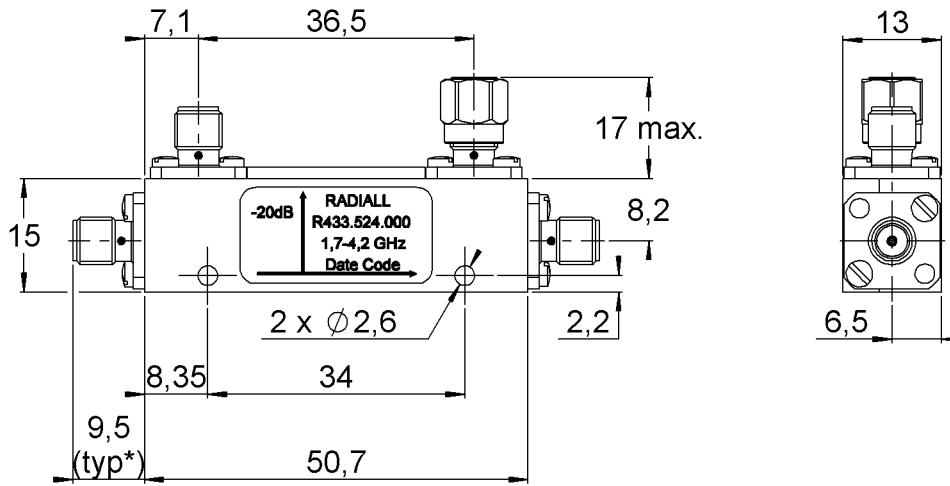

All dimensions are in mm. Tolerances according ISO 2768 m-H



Weight **40,4500** g
Specification

PAGE 2/2	ISSUE 06-12-19A	SERIES COUPLER	PART NUMBER R433524000
----------	------------------------	--------------------------	-------------------------------

ELECTRICAL CHARACTERISTICS

Frequency operating range :	1.7 – 4.2 GHz
Impedance :	50 Ω
VSWR : - Main Line	1.20 max.
- Coupled Line	1.20 max.
Nominal Coupling :	20 dB
Coupling Precision :	± 0.8 dB
Insertion Loss :	0.4 dB max.
Directivity :	20 dB mini
Frequency Sensitivity :	± 0.3 dB
Average Power at 25°C	50W
Peak Power at 25°C	3000W

MECHANICAL CHARACTERISTICS

Connector type :	SMA female per MIL-C 39012
Coaxial Termination :	SMA, 50 Ω, 1W

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	-25°C / +85°C
Storage temperature :	-40°C / +100°C