



## ■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

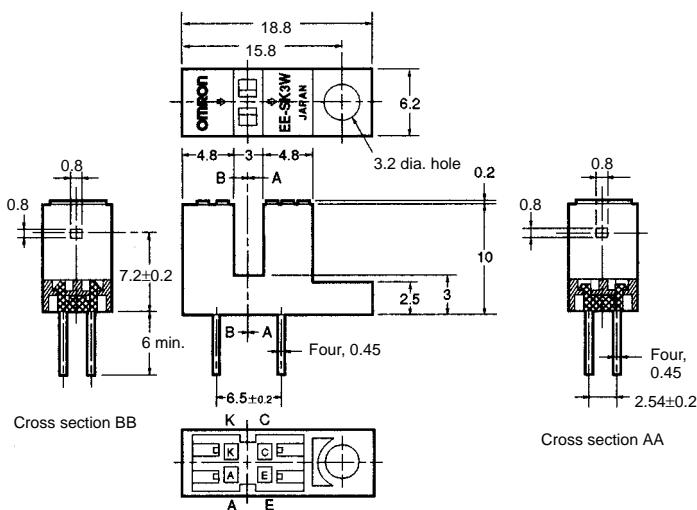

### Internal Circuit

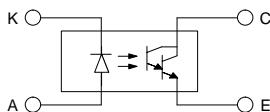

Unless otherwise specified, the tolerances are as shown below.

| Dimensions               | Tolerance   |
|--------------------------|-------------|
| 3 mm max.                | $\pm 0.3$   |
| $3 < \text{mm} \leq 6$   | $\pm 0.375$ |
| $6 < \text{mm} \leq 10$  | $\pm 0.45$  |
| $10 < \text{mm} \leq 18$ | $\pm 0.55$  |
| $18 < \text{mm} \leq 30$ | $\pm 0.65$  |

| Terminal No. | Name      |
|--------------|-----------|
| A            | Anode     |
| K            | Cathode   |
| C            | Collector |
| E            | Emitter   |

## ■ Features

- General-purpose model with a 3-mm-wide slot.
- PCB mounting type.
- With a red LED as an emitter element and a Photo-Darlington transistor as a detector element.

## ■ Absolute Maximum Ratings (Ta = 25°C)

| Item                  | Symbol                    | Rated value                       |
|-----------------------|---------------------------|-----------------------------------|
| Emitter               | Forward current           | I <sub>F</sub> 15 mA (see note 1) |
|                       | Pulse forward current     | I <sub>FP</sub> ---               |
|                       | Reverse voltage           | V <sub>R</sub> 4 V                |
| Detector              | Collector-Emitter voltage | V <sub>CEO</sub> 24 V             |
|                       | Emitter-Collector voltage | V <sub>ECO</sub> ---              |
|                       | Collector current         | I <sub>C</sub> 20 mA              |
|                       | Collector dissipation     | P <sub>C</sub> 75 mW (see note 1) |
| Ambient temperature   | Operating                 | Topr -20°C to 60°C                |
|                       | Storage                   | Tstg -20°C to 80°C                |
| Soldering temperature | Tsol                      | 260°C (see note 2)                |


- Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.  
2. Complete soldering within 10 seconds.

## ■ Electrical and Optical Characteristics (Ta = 25°C)


| Item         | Symbol                               | Value                                   | Condition   |
|--------------|--------------------------------------|---|---|
| Emitter      | Forward voltage                      | V <sub>F</sub> 2.0 V typ., 2.6 V max.   | I <sub>F</sub> = 15 mA  |
|              | Reverse current                      | I <sub>R</sub> 0.01 μA typ., 5 μA max.  | V <sub>R</sub> = 4 V  |
|              | Peak emission wavelength             | λ <sub>P</sub> 700 nm typ.              | I <sub>F</sub> = 3 mA   |
| Detector     | Light current                        | I <sub>L</sub> 1.5 mA min., 120 mA max. | I <sub>F</sub> = 3 mA, V <sub>CE</sub> = 10 V                         |
|              | Dark current                         | I <sub>D</sub> 2 nA typ., 250 nA max.   | V <sub>CE</sub> = 10 V, 0 lx  |
|              | Leakage current                      | I <sub>LEAK</sub> ---                   | ---   |
|              | Collector-Emitter saturated voltage  | V <sub>CE</sub> (sat) 0.9 V typ.        | I <sub>F</sub> = 3 mA, I <sub>L</sub> = 0.5 mA                        |
|              | Peak spectral sensitivity wavelength | λ <sub>P</sub> 800 nm typ.              | V <sub>CE</sub> = 10 V  |
| Rising time  | tr                                   | 180 μs typ.                             | V <sub>CC</sub> = 5 V, R <sub>L</sub> = 100 Ω, I <sub>L</sub> = 10 mA |
| Falling time | tf                                   | 60 μs typ.                              | V <sub>CC</sub> = 5 V, R <sub>L</sub> = 100 Ω, I <sub>L</sub> = 10 mA |

## ■ Engineering Data


**Forward Current vs. Collector Dissipation Temperature Rating**

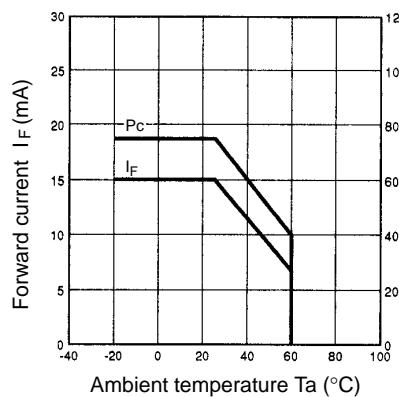


**Forward Current vs. Forward Voltage Characteristics (Typical)**

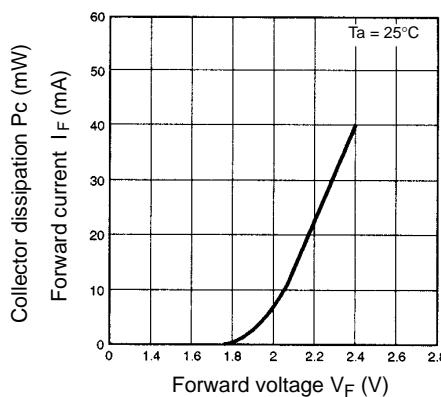


**Light Current vs. Forward Current Characteristics (Typical)**

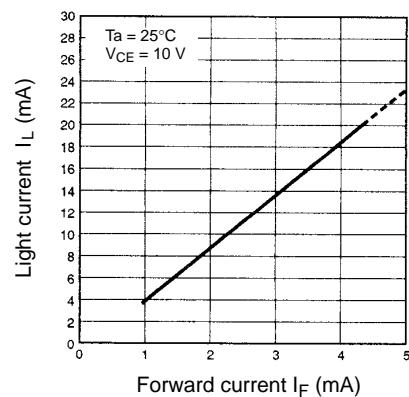


**Light Current vs. Collector-Emitter Voltage Characteristics (Typical)**

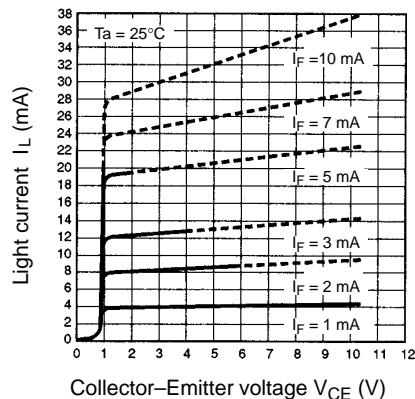


**Relative Light Current vs. Ambient Temperature Characteristics (Typical)**

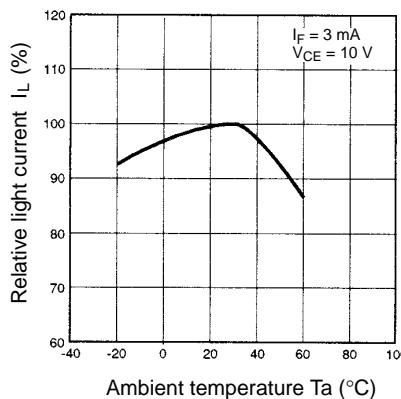


**Dark Current vs. Ambient Temperature Characteristics (Typical)**

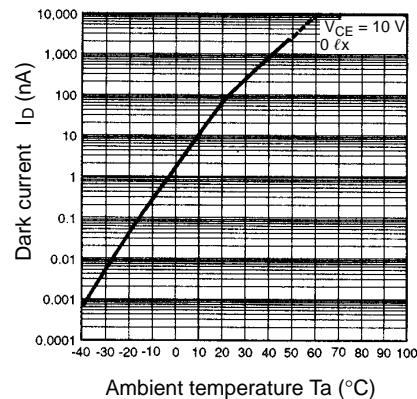

**Response Time vs. Load Resistance Characteristics (Typical)**

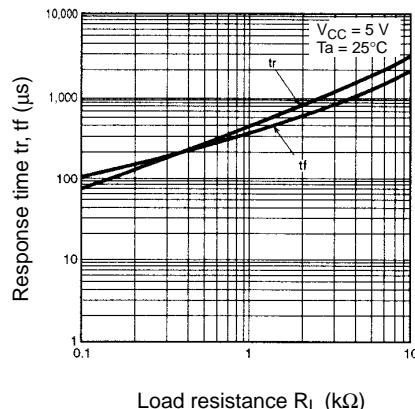

**Sensing Position Characteristics (Typical)**

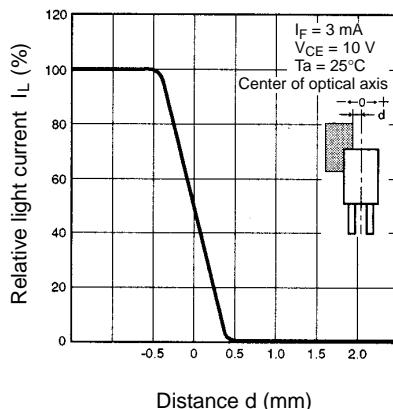

**Response Time Measurement Circuit**

