
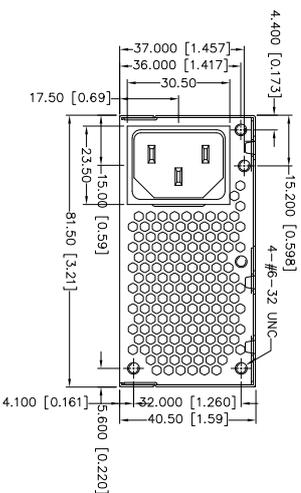


3 增加束線帶

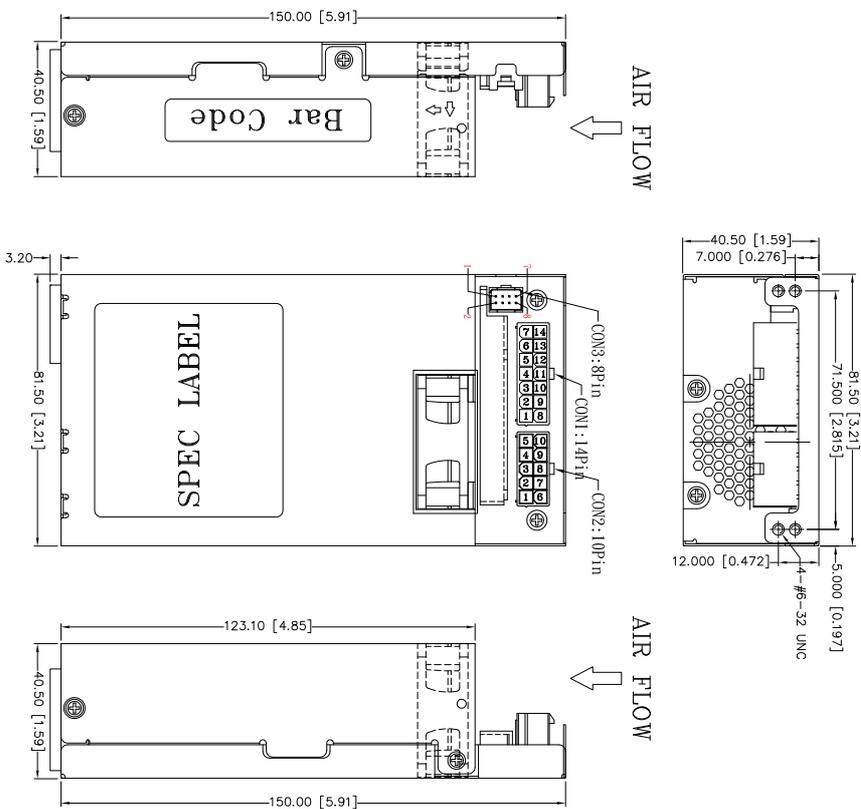

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	Gauge	CONNECTOR TYPE	CABLE LENGTH		
P1	1	+3.3V	ORANGE	20	WST	200±15mm		
	2	+3.3V	ORANGE	20	P20-142002Z-B or EQUIV.			
	3	COM	BLK	20				
	4	+5V	RBD	20				
	5	COM	BLK	20				
	6	+5V	RBD	20				
	7	COM	BLK	20				
	8	PW-OK	GRAY	24				
	9	+5Vsb	PURPLE	24				
	10	+3.3V	YELLOW	20				
P2	1	+3.3V	ORANGE	20	WST	310±15mm		
	2	COM	BLK	20	P4-142002Z-B or EQUIV.			
	3	+12V	YELLOW	20				
	4	+12V	YELLOW	20				
	1	+12V	YELLOW	20	WST		250±15mm or EQUIV.	
	2	COM	BLK	20				
	3	COM	BLK	20				
	4	+5V	RBD	20				
	PA	1	COM	BLK	20		AMP	155±10mm or EQUIV.
		2	COM	BLK	20			
3		COM	BLK	20				
4		+5V	RBD	20				
PB	1	COM	BLK	20	WST	155±10mm or EQUIV.		
	2	COM	BLK	20				
	3	COM	BLK	20				
	4	+12V	YELLOW	20				
	1	+3.3V	ORANGE	20	WST		310±15mm or EQUIV.	
2	COM	BLK	20					
PC	1	+3.3V	ORANGE	20	WST	155±10mm or EQUIV.		
	2	COM	BLK	20				
	3	+5V	RBD	20				
	4	COM	BLK	20				
	5	+12V	YELLOW	20				
PD	1	+3.3V	ORANGE	20	WST	155±10mm or EQUIV.		
	2	COM	BLK	20				
	3	+5V	RBD	20				
	4	COM	BLK	20				
	5	+12V	YELLOW	20				

P/N.:9PA1507700

- NOTE:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 所有膠殼均需使用黑色膠殼(CON3及其對應8Pin膠殼除外).
 3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]
- UNIT:mm [inch]

MODEL NO. : FSP150-50FGNBI(M)(STD0001)	TITLE: ASSY	SHEET: 1 OF 1	REV:03
R&D(2)	PE	DRAWN	DATE
INTERIOR COUNTERSIGN:		黃淑芳	OCT.19.2018