

FACTORY I.D. CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS

.87
(22.1)


.63
(16.1)

1.02±.03
(25.9±0.8)



OPTIONAL LOCKING RAMPS

.69
(17.6)

OPTIONAL MOUNTING EAR (PREBENT EAR SHOWN)

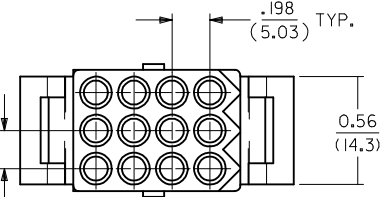

RECEPTACLE



FACTORY I.D.

CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS


.84
(21.4)

.63
(16.1)

.98±.03
(24.9±0.8)

0.42
(10.7)

OPTIONAL MOUNTING EAR (PREBENT EAR SHOWN)




.98
(24.8)

.74
(18.8)

0.56
(14.3)

.198
(5.03) TYP.

PLUG



| | | | | | | |
|---|--|---------------------------------------|------------------|--|--------------|---|
| OBSOLETE 1360-R1* EC NO: UCP2015-1850 DRWN:JFOX 2014/11/03 CHKD:HKIPPER 2014/11/03 APPR:FSMITH 2014/11/13 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
| | ▽=0 | mm INCH | IN/MM | 2:1 | INCH | |
| | ▽=0 | 4 PLACES ± --- ± --- | DRAWN BY DATE | TITLE | | |
| | ▽=0 | 3 PLACES ± --- ±.010 | CHECKED BY DATE | .093/(2.36) HOUSINGS PLUG AND RECEPTACLE 12 CKT, .198/(5.03)CTR. | | |
| | ▽=0 | 2 PLACES ± 0.25 ±.014 | APPROVED BY DATE | SD-1360-* | | |
| 0 | 1 PLACE ± 0.35 ± --- | 0 PLACE ± --- ± --- | MATERIAL NO. | DOCUMENT NO. | SHEET NO. | |
| 0 | ANGULAR ± 2° | | SEE CHART | 1 OF 2 | | |
| AE2 | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |

