


PC board drilling dimensions (after plating)
(thickness ≤ 3.20±0.30mm)

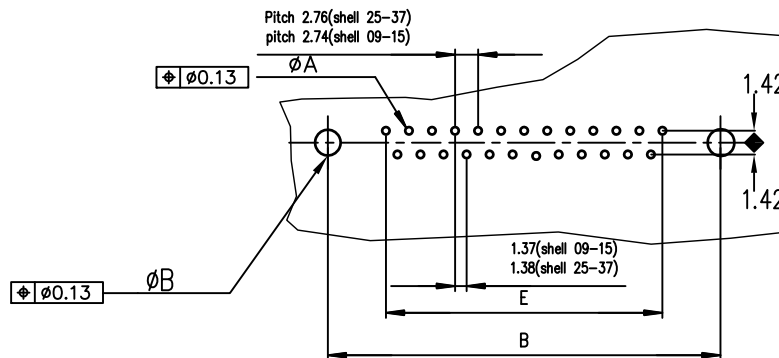

ROHS PART NUMBER

| SHELL | A±0.38 | B±0.12 | C±0.10 | D±0.25 | E±0.07 | PART NUMBER |
|-------|--------|--------|--------|--------|--------|----------------|
| 09 | 30.81 | 24.99 | 16.96 | 16.21 | 10.96 | D09S91C*GL00LF |
| 15 | 39.14 | 33.32 | 25.18 | 24.54 | 19.18 | D15S91C*GL00LF |
| 25 | 53.03 | 47.04 | 39.12 | 38.25 | 33.12 | D25S91C*GL00LF |
| 37 | 69.32 | 63.50 | 55.68 | 54.71 | 49.68 | D37S91C*GL00LF |

Plating: 4 --> 200 mating
Plating: 6 --> 500 Mating
Plating: 8 --> 1.25µ Equivalent PdNi/Au

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

| | | | | | | | | | |
|-------------|-------------|-----------------------|-------------|---------------------------------------|--------|------------------|---------------|--------------------------------------|--------------------------|
| mat'l. code | | surface ISO 1302 ✓ | | tolerance ISO 406 ISO 1101 | | projection mm | | product family D-SUB | |
| ltr | ecn no | dr | date | tolerances unless otherwise specified | | mm | | title | |
| J | ELX-I-21654 | AB | 2015-10-26 | angles | linear | .0±0.1 | scale 2:1 | FEMALE DELTA-D STRAIGHT PRESS-FIT | |
| K | ELX-I-24020 | AAB | 2016-06-06 | 0°±2' | | .00±0.1 | | | |
| | | | | | | .000±0.1 | | | |
| | | dr | PESSON | 1995-10-03 | | | dwg no | | sheet 1 of 1 |
| | | engr | MITHUN PAUL | 2016-06-06 | | | C01-8646-0303 | | A3 |
| | | chr | ATHUL A.B | 2016-06-06 | | | type | | Product Customer Drawing |
| | | appd | BIJU K PAUL | 2016-06-06 | | | | | |
| sheet index | revision | K | | | | | | | |
| | sheet | 1 | | | | | | | |