


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description

D

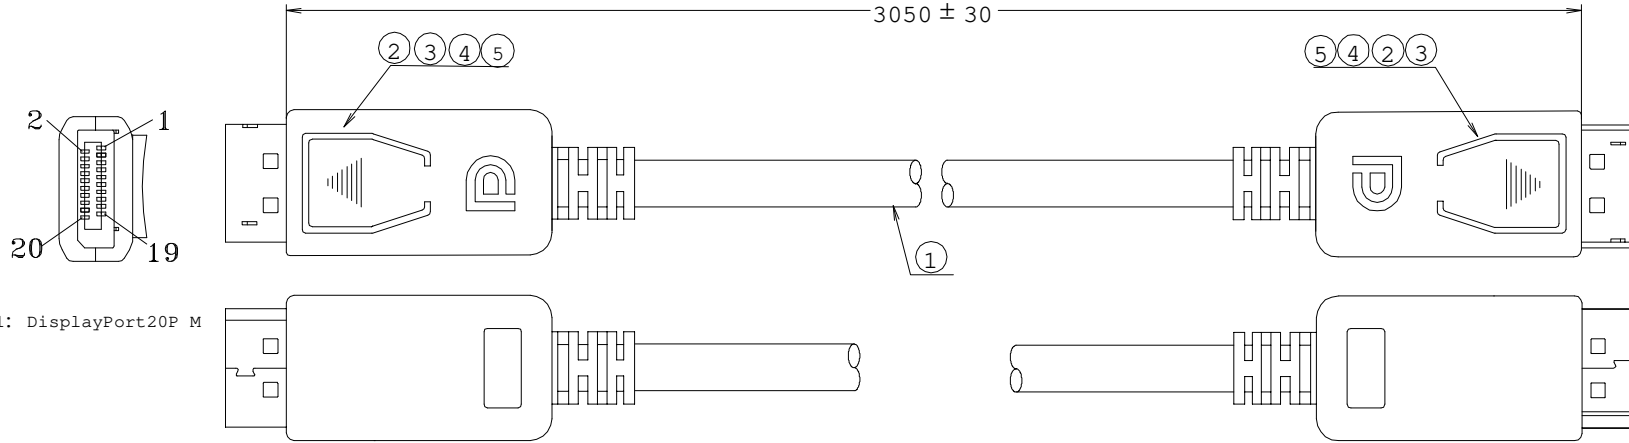


3.Electricity Test:

- A.Voltage: DC 300V/10ms
- B.Insulation Resistance: $\geq 20M\Omega$
- C.Counduct Resistance: $\leq 2\Omega$

2.Pin Assignment:

CONN1	CONN2	CONN1	CONN2
10	12 White	10	3 White
12	10 Red	12	1 Brown
11	11 Ground	11	2 Ground
15	9 White	15	15 White
17	7 Green	17	17 Black
16	8 Ground	16	16 Ground
13	6 White	13	13 White
14	4 Blue	14	14 Red
18	5 Ground	18	18 Yellow
19		19	19 Orange
G		G	G Ground

Sticker:



⑧	0510000434	48×40×20cm(RoHS)	1/60	Box
⑦	0480TQ1512	7"×10"(RoHS)	1	PC
⑥	0480TQ1518	15"×17"(RoHS)	1/10	PC
⑤	0410001002	45P Black	4.5	g
④	0410TQ1001	Transparent PE	3	g
③	0450001052	ABS CASE BLK (RoHS)	2	Set
②	0210000032	Displayport (M) Golden Plated(RoHS)	2	Set
①	0131001039	UL20276{ [30# (7/0.1TA) *1P+D (7/0.1TA)+AL+MY] *5C+30# (7/0.1TA) *4C+Cotton Thread}}+MY+AL+D (7/0.127TA)+B (85% AL B)OD:6.0 Blk L=3050 (RoHS)	1	PC
No.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY	DATE: 2012/7/5	DESCRIPTION: Displayport M/Displayport M
CHECKED BY	SHEET 1 of 1	DP-XXF-MM
APPROVED BY	SCALE 1:1	REv.00 UNIT:mm