

Ratings

Voltage: 300 V

Temperature

Static: -40 to 105 °C

Dynamic: -20 to 105 °C

Flammability: VW-1

Water resistant: 75 °C

Oil resistant: 60 °C (jacket)

≥50% elongation and tensile strength after aging

UV resistance: jacket, 720 hours xenon or carbon arc exposure

≥80% tensile strength and elongation after aging

Conductor

Conductor count: 3

Gauge: 22 AWG 0.34 mm²

Material: tinned copper strands

Strand size: Ø 0.16 mm x 17

Resistance at 20 °C: 59.4 Ω /km Max

Insulator

Material: PVC

Color: red, black, white

Diameter: Ø 1.6 ±0.10 mm

Nominal thickness: 0.39 mm

Resistance at 20 °C: 10 MΩ /km Min

Drain

Stranding: Ø 0.16 mm x 17

Shield

Type: aluminum mylar + tinned copper braid

Coverage: 65% min braid, 100% foil

Braid stranding: Ø0.10 mm

Outer jacket

Material: PVC, 80A

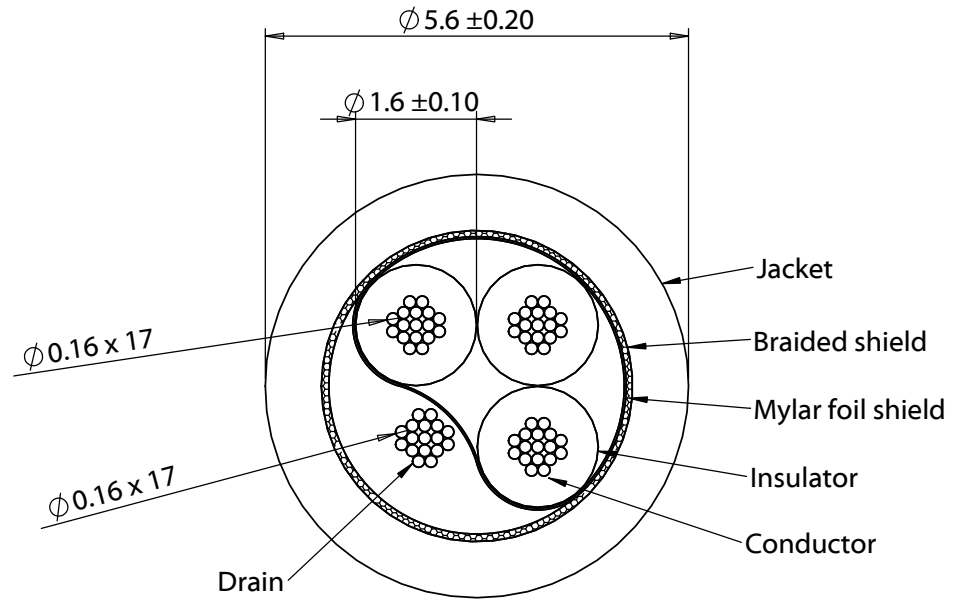
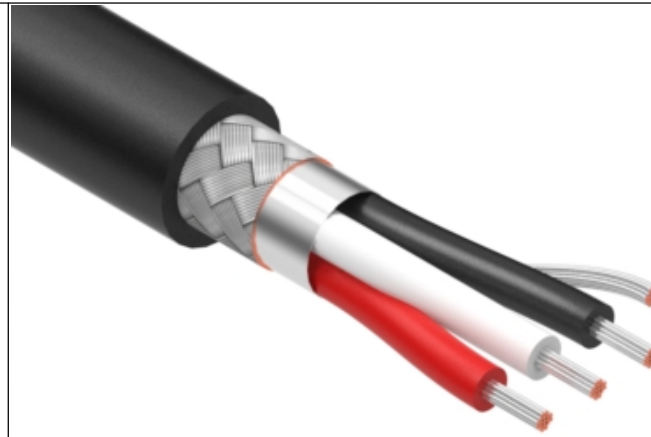
Color: black

Diameter: Ø 5.6 ±0.20 mm

Nominal thickness: 1.0 mm

Wire marking: E339579 UL AWM STYLE 20387 22 AWG 105°C

300V VW-1 60°C OIL RESISTANT UV RESISTANT TENSILITY

Use: External wiring

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY
A	8/26/2020	Initial release	JC Digitally signed by JC Date: 2020.08.26 11:41:56 -07'00'	RoHS compliant	
			Verified:	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 3C TS, 22 AWG, UL20387, 300V, 105C, 60C oil, UV, 5.6 mm, shielded, VW-1, PVC, 80A, black	Size: A Part number: 30-01570
					Scale: 10:1 Sheet 1 of 1

5

4

3

2

1