


т	۵	п –	m	0

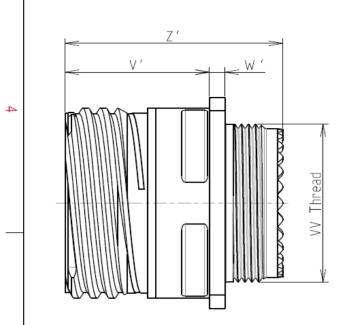

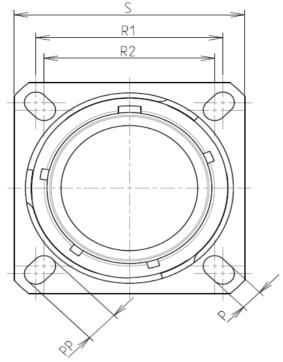



Keying Shown a

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE: 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

1	-Shell Material	: Composite			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +175°C			
	-Salt Spray	: 2000 hours			

: 11.7 g ± 10%

8D 0

G

11

-

J

01

F

S B

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

m		0		σ	>		
S R1 R2 R1 R1 R2 R1 R1 R1 R1 R1 R1 R1 R1 R1 R1 R1 R1 R1							4
		LAY	OUT SHOWN AS EXAI	MPLE			3
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max VV THREAD M15x1-6g	Connector dimensionimNominalP3.25±0.2P4.93±0.21120.621218.26S26.2±0.31'19.5±1.4/-0V'2.1/3.652'32 Max						2
		Р	N: 8D011J0	1SBL			
	A 14-10-2016 ISS DATE Designed By:	First Release Latest modificatio Date:	on - by	CUST	FOMER DRAWING	MOD N°	
	TITLE		Composite F	Receptacle 8D	series		
L Delivered W/O Contacts	SCALE .		General linear Tolerances: ±		PRDS / PROJECT 859		1
ORIENTATION : B CONTACT TYPE : SOCKET(500 Matings)	SOUKIAU	WWW	.Souriau.co	M	This document is the pro SOURIAU it must not be reproduc ommunicated without pe	ced or	
CONTACT LAYOUT : 11-01	FORMAT A3	1	SOURIAU D 8D011J01			SHEET 1/2	
E	D	С		В	Α		-

		۵	ار (m	D	0
		Contact Layout				Panel Cutout
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		* 	
З	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendation)
2						Country FR PN: 8D011J(
					A 14-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
4					SCALE NA	Composite General linear Tolerances: ±
					FORMAT	J WWW.SOURIAU.CO
		1	I		A3	8D011J03
	Н	G	F	E	D	C

