THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-. .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| AD | 39 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | L1 | ECO-05-7481 | 14FEB06 | MB | JO |
| | L2 | REVISED PER ECO-09-020932 | 24AUG09 | KK | AEG |

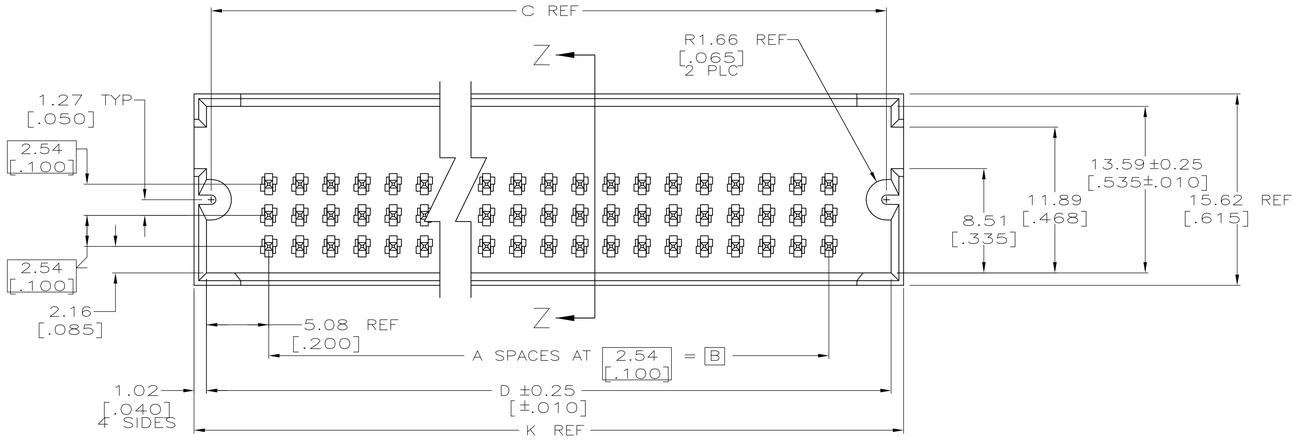


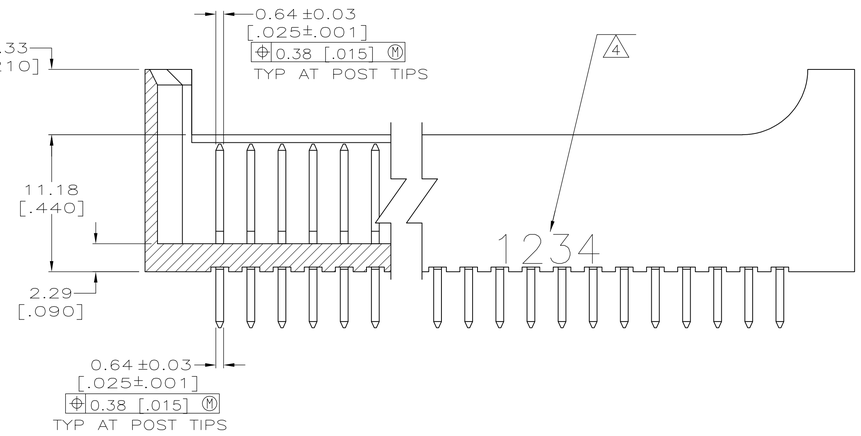


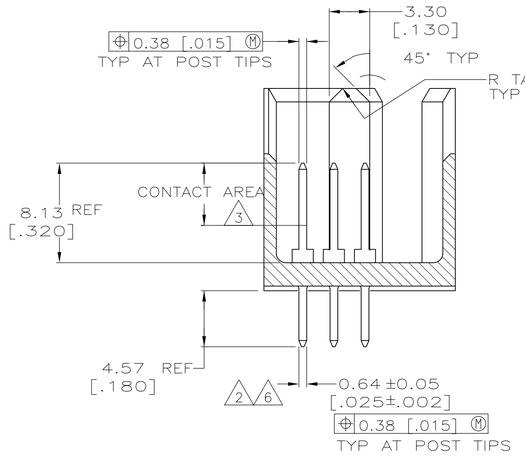


SECTION Z–Z
ROTATED 90° CW

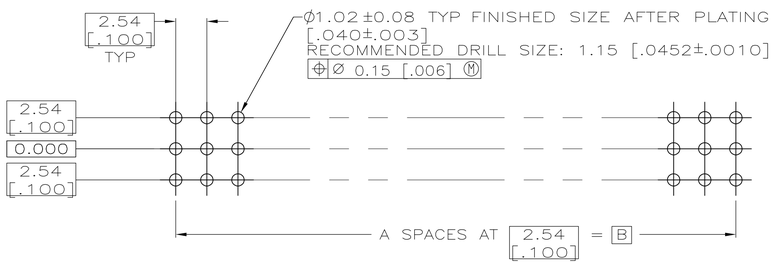


RECOMMENDED MOUNTING HOLE LAYOUT

1. HOUSING: GLASS FILLED NYLON; COLOR: BLACK.
   POST: COPPER ALLOY.
2. FINISH OVER INDICATED AREA:[.000100–.000200] BRIGHT TIN–LEAD OVER 0.00127 [.000050] NICKEL.
3. CONTACT AREA: 0.00076 [.000030] GOLD OVER 0.00127 [.000050] NICKEL.
4. RECESSED DATE CODE AND CSA LOGO
5. PRELIMINARY PART – NOT RELEASED FOR PRODUCTION
6. FINISH OVER INDICATED AREA:[.000100–.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL.
7. ROHS 2002/95/EC COMPLIANT
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | E | D | C | B | A | NO OF POSN | PART NUMBER |
|---|---|---|---|---|---|---|---|---|
| OBSOLETE | 3 6 | 47.75 [1.880] | 45.72 [1.800] | 44.96 [1.770] | 35.56 [1.400] | 14 | 45 | 7 6-103264-0 |
| OBSOLETE | | 45.21 [1.780] | 43.18 [1.700] | 42.42 [1.670] | 33.02 [1.300] | 13 | 42 | 7 5-103264-9 |
| OBSOLETE | | 50.29 [1.980] | 48.26 [1.900] | 47.50 [1.870] | 38.10 [1.500] | 15 | 48 | 7 5-103264-8 |
| OBSOLETE | | 40.12 [1.580] | 38.10 [1.500] | 37.34 [1.470] | 27.94 [1.100] | 11 | 36 | 7 5-103264-7 |
| OBSOLETE | | 174.75 [6.880] | 172.72 [6.800] | 171.96 [6.770] | 162.56 [6.400] | 64 | 195 | 7 5-103264-6 |
| OBSOLETE | | 111.25 [4.380] | 109.22 [4.300] | 108.46 [4.270] | 99.06 [3.900] | 39 | 120 | 7 5-103264-5 |
| OBSOLETE | | 187.45 [7.380] | 185.42 [7.300] | 184.66 [7.270] | 175.26 [6.900] | 69 | 210 | 7 5-103264-4 |
| | | 136.65 [5.380] | 134.62 [5.300] | 133.86 [5.270] | 124.46 [4.900] | 49 | 150 | 7 5-103264-3 |
| OBSOLETE | | 98.55 [3.880] | 96.52 [3.800] | 95.76 [3.770] | 86.36 [3.400] | 34 | 105 | 7 5-103264-2 |
| OBSOLETE | | 70.61 [2.780] | 68.58 [2.700] | 67.82 [2.670] | 58.42 [2.300] | 23 | 72 | 7 5-103264-1 |
| | | 47.75 [1.880] | 45.72 [1.800] | 44.96 [1.770] | 35.56 [1.400] | 14 | 45 | 5 1-103264-0 |
| | | 45.21 [1.780] | 43.18 [1.700] | 42.42 [1.670] | 33.02 [1.300] | 13 | 42 | 5 103264-9 |
| | | 50.29 [1.980] | 48.26 [1.900] | 47.50 [1.870] | 38.10 [1.500] | 15 | 48 | 5 103264-8 |
| OBSOLETE | | 40.12 [1.580] | 38.10 [1.500] | 37.34 [1.470] | 27.94 [1.100] | 11 | 36 | 103264-7 |
| OBSOLETE | | 174.75 [6.880] | 172.72 [6.800] | 171.96 [6.770] | 162.56 [6.400] | 64 | 195 | 103264-6 |
| OBSOLETE | 2 3 | 111.25 [4.380] | 109.22 [4.300] | 108.46 [4.270] | 99.06 [3.900] | 39 | 120 | 103264-5 |
| 8 OBSOLETE | | 187.45 [7.380] | 185.42 [7.300] | 184.66 [7.270] | 175.26 [6.900] | 69 | 210 | 103264-4 |
| | | 136.65 [5.380] | 134.62 [5.300] | 133.86 [5.270] | 124.46 [4.900] | 49 | 150 | 103264-3 |
| OBSOLETE | | 98.55 [3.880] | 96.52 [3.800] | 95.76 [3.770] | 86.36 [3.400] | 34 | 105 | 103264-2 |
| | | 70.61 [2.780] | 68.58 [2.700] | 67.82 [2.670] | 58.42 [2.300] | 23 | 72 | 103264-1 |
| FINISH | | | | | | | | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13 [.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1

FINISH SEE TABLE

DWN K.L.CLOUSER/UTA 2/6/91
CHK D SARVER 6/19/91
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME HEADER ASSY, MOD II, TRIPLE ROW, 2.54 X 2.54 [.100 X .100] 0.64 [.025] SQ SOLDER PIN

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-103264 | – |

CUSTOMER DRAWING

| SCALE | SHEET | REV |
|---|---|---|
| 4:1 | 1 OF 1 | L2 |