


PACKAGE: INDIVIDUAL PE BAG.

500g Weight

注意:

1. L1为我司下料长度;
2. L2为吊重500g所需达到长度;
3. 打曲线时请按我司下料长度L1打曲线.

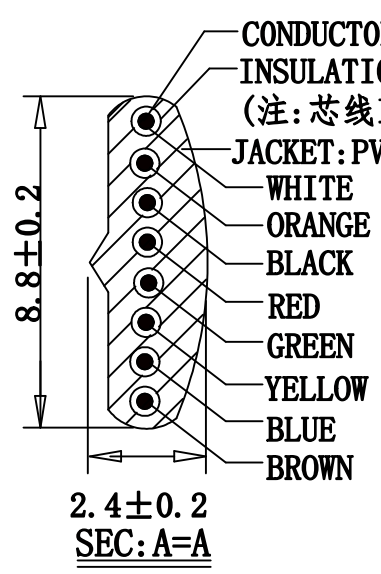

CONDUCTOR: [26AWG (0.12X12) BARE COPPER] X8C  
 INSULATION: (PP6331 ID: 0.95-1.0) X8C  
 (注: 芯线ID为0.95以上但不可超过1.0)  
 JACKET: PVC NOUL 80P (弹性料) TOTM配方

P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

NOTE FOR PLUG:  
 MATERIAL: HOUSING-POLYCARBONATE, CLEAR.  
 TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE.  
 THICK GOLD IN LOCALIZED GOLD PLATE.  
 AREA, GOLD FLASH OVER THE REMAINDER.  
 OVER 2.54um[.000100] THICK NICKEL  
 UNDERPLATE.

PART NO	DRAWING NO	BUYER COLOR	VENDOR COLOR	CUSTOMER Accepted ("L2")	Retracted Length ("L3")	CUT LENGTH "L1"
523-26-8800-WH-0005F	A	White	W-103 LIGHT	5.0FT-5.75FT	700±50	2900-3000
523-26-8800-WH-0007F	B	White	W-103 LIGHT	7.0FT-8.05FT	1000±50	4000-4200
523-26-8800-WH-0010F	C	White	W-103 LIGHT	10.0FT-11.5FT	1500±50	5900-6100
523-26-8800-WH-0012F	D	White	W-103 LIGHT	12.0FT-13.8FT	1650±50	7000-7200
523-26-8800-WH-0014F	E	White	W-103 LIGHT	14.0FT-16.1FT	1900±50	7600-7800
523-26-8800-WH-0025F	F	White	W-103 LIGHT	25.0FT-28.75FT	3200±50	14300-14500

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology	
IDRAWING NO: 671-342	CUSTOMER: L-671
ITEM NO: 8C COILD CORD P+O PLUG	UNIT: mm
DATE: 2012-02-20	ISSUE (A/0)
DRAWN:                      QE:                      QA:	
SALES DEPT:                      SALES MANAGER:	