

This document is the property of Berg Electronics. The design and specifications disclosed hereon are proprietary and shall not be reproduced, copied or used for manufacture or sale of devices without expressed written authorization.

PART NO. 28JR175-1


MATERIAL
 BODY: BERYLLIUM COPPER, QQ-C-530, ALLOY 173, 1/2 HD
 CONTACT: TFE FLUOROCARBON, ASTM-D1710, TYPE 1, GRADE 1
 INSULATOR: TFE FLUOROCARBON, ASTM-D1710, TYPE 1, GRADE 1

FINISH:
 BODY: PROPRIETARY BRIGHT NICKEL (IP23)
 CONTACT: GOLD

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC-4 GHZ
VOLTAGE RATING: 500 VRMS
INSULATION RESISTANCE: 5,000 MEGOHMS
V.S.W.R.: 1.30 MAX. TO 4 GHZ

CONNECTOR MEETS M39012

COVER DRAWING

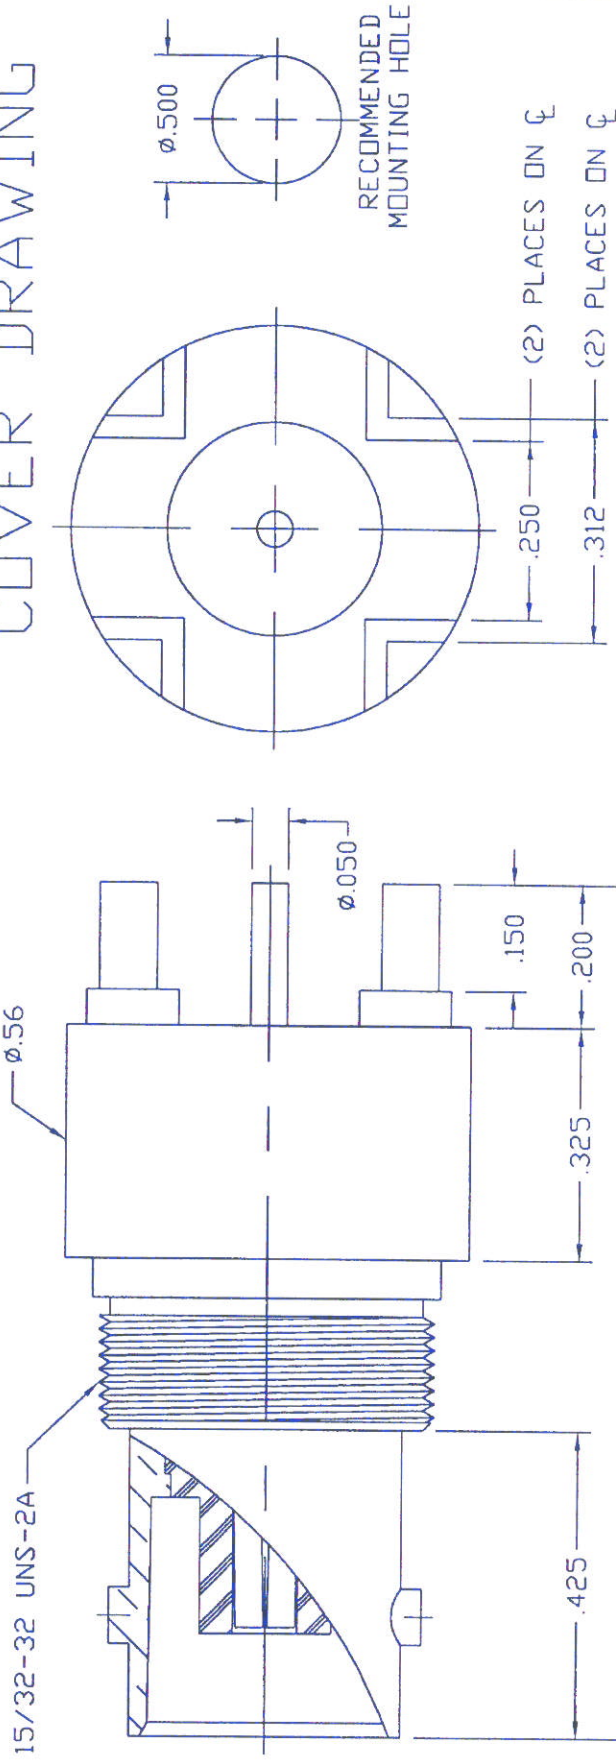

SCALE X 4 (1902)

DRAWN BY: T.L. BROWNING		DATE: 10/2/92	TITLE: BNC JACK
TOLERANCES (EXCEPT AS NOTED)		SCALE:	RECEPTACLE
DIM.	.XX ±.020	CAD FILE:	SINGLE HOLE MT.
.XXX	±.005		P.C.B. MOUNT
ANGLES	±1°		PART NO. 28JR175-1
CONC.	.005 TIR		SHT. 1 OF 1
SURF.	64 ✓		
FSCM NO. 24931			

APPROVED

