
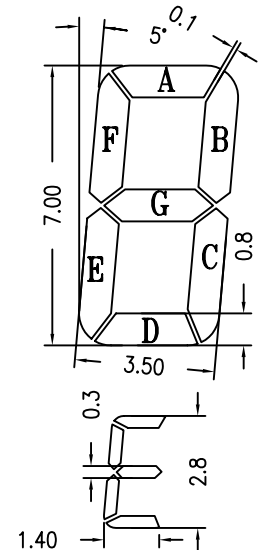


PIN	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19
COM1	/	D1	G1	/	D2	E2	G2	C2	D4	E3	G3	C3	D3	E4	G4	C4	/	D5	COM1
COM2	COM2	E1	A1	B1	C1	F2	A2	B2	COL	F3	A3	B3	P1	F4	A4	B4	⊗AEF5	G5	/

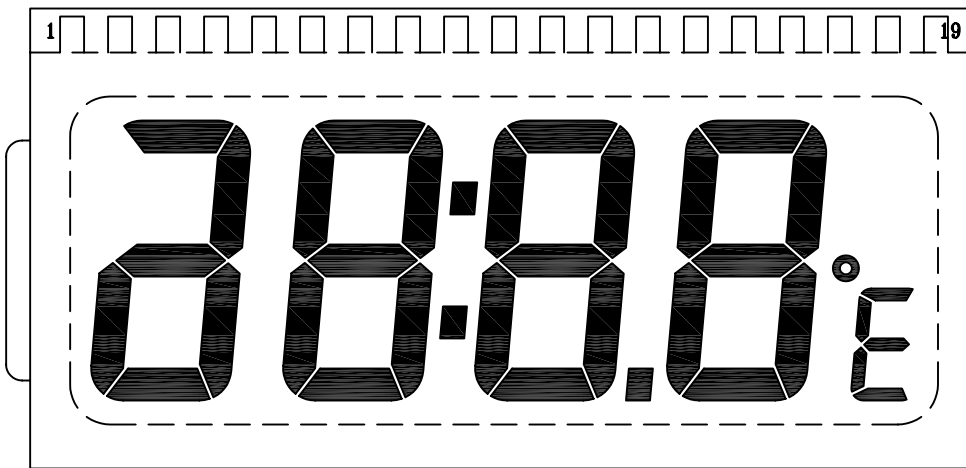

NOTES:

- | | | | |
|-----------------------|---------------------|-----------------------|-------------|
| 1. DISPLAY TYPE: | TN | 5. OPERATING VOLTAGE: | 3.0 V |
| 2. VIEWING DIRECTION: | 6:00 | 6. OPERATING TEMP: | -20~70°C |
| 3. POLARIZER MODE: | POSITIVE/REFLECTIVE | 7. STORAGE TEMP: | -30~80°C |
| 4. DRIVER METHOD: | 1/2 DUTY 1/2 BIAS | 8. CONNECTOR: | WITHOUT PIN |