


**May not be suitable for all medical and aerospace applications.  
Specifications: Contact Mallory Sonalert to discuss your application.**

**NO CIRCUITRY**


|                                  |                                   |
|----------------------------------|-----------------------------------|
| Oscillation Frequency (Hz)       | 2400                              |
| Operating Voltage (Vp-p)         | 1.25 ~ 2.5                        |
| Rated Voltage (Vp-p)             | 1.5                               |
| Current Consumption Max. (mA)    | 32 at Rated Voltage               |
| Sound Pressure Level Min. (dB)   | 85 at 10cm at Rated Voltage       |
| Coil Resistance (Ω)              | 16 ± 2                            |
| Operating Temperature (°C)       | -20 ~ +70                         |
| Storage Temperature (°C)         | -30 ~ +80                         |
| Housing                          | PPO plastic resin (Color: Black)  |
| Leading Pin                      | Tin Plated Brass                  |
| Weight (Grams)                   | 1.4                               |
| Condition by wave soldering (°C) | 260 ±5 / within 5 sec             |
| Condition by hand soldering (°C) | 350 ±20 / within 5 sec            |
| Options                          | For other options contact factory |

**Dimensions:** (units: mm)

**ROHS Compliant**

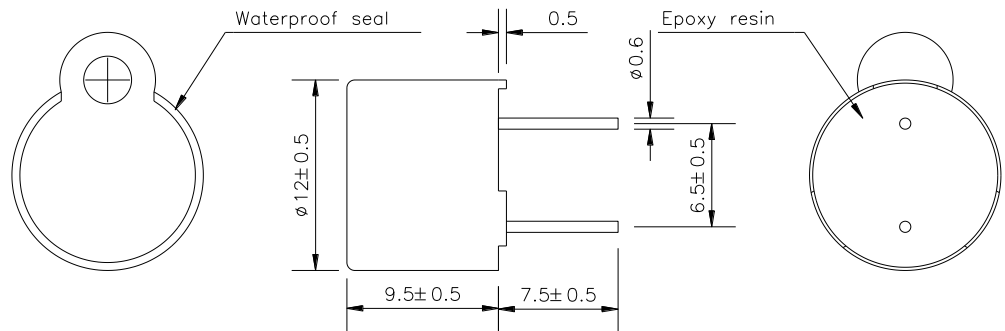

After Code Date 2017/06/13

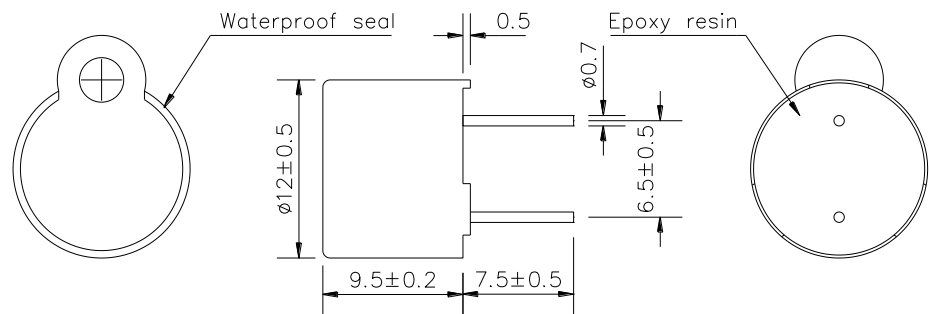

Before Code Date 2017/06/12

**Packaging:** Parts are supplied in tube (40 per tube).