


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

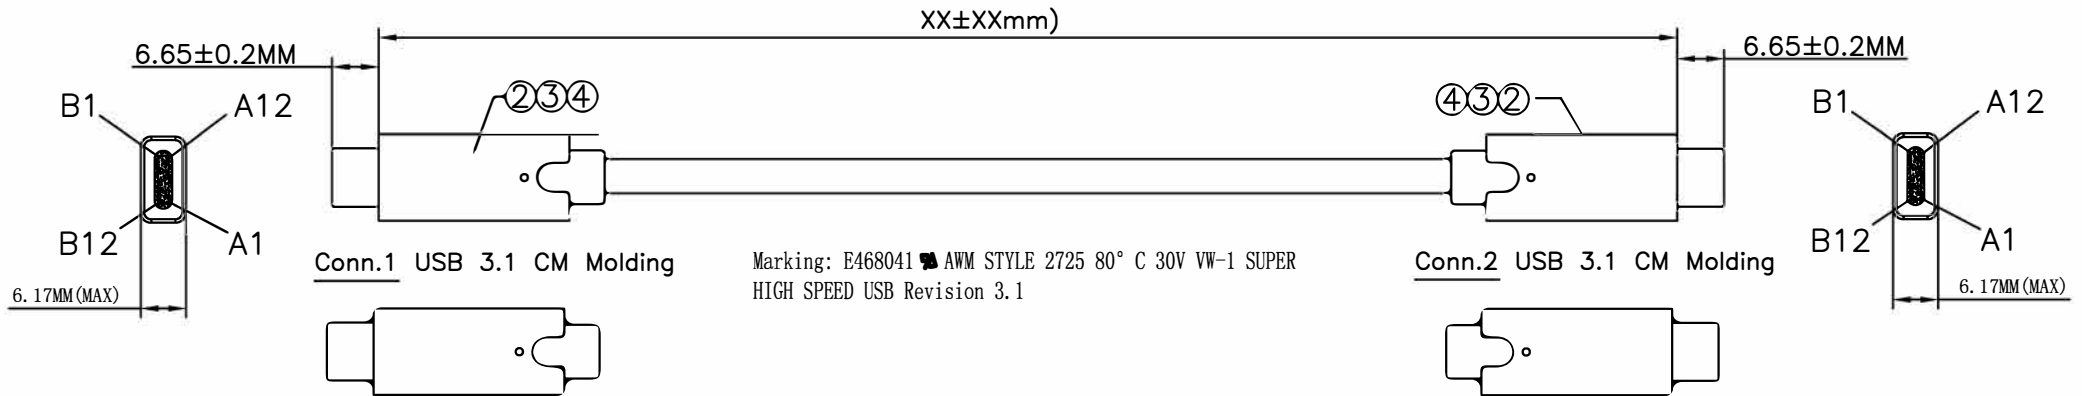

Marking: E468041 AWM STYLE 2725 80° C 30V VW-1 SUPER  
HIGH SPEED USB Revision 3.1

	1FT(305±10MM)
	3FT(915±15MM)
	6FT(1830±30MM)

**Electrical Test:**

- 100%Test(Open, short ,miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 5M ohm min.
- Hi-pot:300V DC/10ms

transmission speed:10GB/S(MAX)

**Pin Assignment**

Conn.1				Conn.2				
A1	B1	A12	B12	DRAIN+DRAIN	A1	B1	A12	B12
A4	B4	A9	B9	POWER-RED	A4	B4	A9	B9
A5				CC-BLUE	A5			
B5				VCONN-YELLOW	B5			
A6				USB2.0 WHITE	A6			
A7				USB2.0 GREEN	A7			
A2				RED	B11			
A3				WHITE	B10			
B11				GREEN	A2			
B10				BLACK	A3			
B2				YELLOW	A11			
B3				BLUE	A10			
A11				ORANGE	B2			
A10				BROWN	B3			
A8				SBU-RED	B8			
B8				SBU-BLACK	A8			
Shell				Drain	Shell			

4	45P PVC BLACK	1	PCS
3	PE	1	PCS
2	USB3.1 (C) M Solder Type Shell Nickel, ecru Insulation	1	PCS
1	UL2725 (32# (7/0.08T)*1P+D(7/0.08T)+AL+MY)*4P+32#(7/0.08T)*1P+32#(7/0.08T)*4C+22#(65/0.08T)*2C+F+AB(16/9/0.08T) OD:4.5MM BLACK	XX	m
NO	DESCRIPTION	Q'TY	UNIT

Unless specified on the drawing, tolerances are per the follows:

.x	+1
.xx	+0.2
	+0.05

**Unirise**  
Your Cabling Solutions Provider

DRAWN BY	DATE: 2017.5.28	DESCRIPTION: USB 3.1 Type C Male TO Type C Male
CHECKED BY	SHEET 1 of 2	ITEM NO. USBC-MM-XXF
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm