

6

5

4




3

2


1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480031	E66A06003M010	3' 3" +2.19"/-0" [ 1M +55.6/-0 mm ]

AUX VIEW  
SCALE 1:4

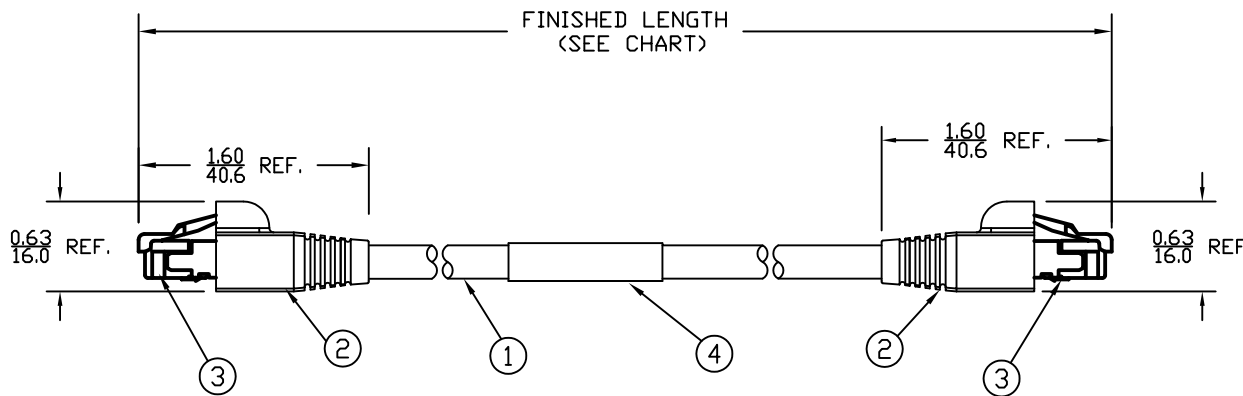


MALE - FACE VIEW



MALE - FACE VIEW

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #24/4 UNSHIELDED PVC
- 4) ELECTRICAL DATA:  
ACCORDING TO CAT5e ETHERNET STANDARD  
MAX. VOLTAGE: 30V  
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -20°C TO 75°C
- 6) WRAP LABEL IS MARKED WITH P/N, DATE CODE,  
VOLTAGE & AMPERAGE.
- 7) ASSEMBLY IS RoHS COMPLIANT.

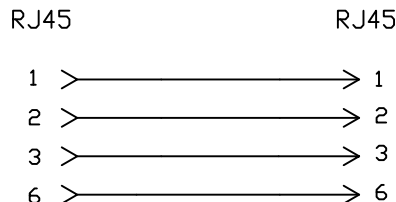

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	LABEL	PLASTIC FILM	BLACK/YELLOW
3	2	RJ45 PLUG	POLYCARBONATE	CLEAR
2	2	BOOT	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PVC JACKET	TEAL

SD RELEASE EC NO: WNA2010-0432 DRWN: TVICKERS 2010/01/14 CHKD: BWOODMA APPR: DTTITUS 2010/01/15	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		▽=0 ∇=0		IN/MM	1:1	INCH	
				DRAWN BY DATE	TITLE		
				CHECKED BY DATE	RJ45/RJ45 CABLE ASSY 10 BASE T #24/4 UNSHIELDED PVC		
			4 PLACES ±---	mm	---		
			3 PLACES ±---	INCH	---		
			2 PLACES ±0.13		2010/01/13		
			1 PLACE ±0.25 ±.020		2010/01/15		
			ANGULAR ±1/2°				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART			
				SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6

5

4

3

2

1