



Electrical specifications

Passband: 1975-2000 MHz
Insertion loss: < 43 dB (3.5 DB typ)
Rejection: 45 dB@1920-1965 MHz
Return loss: 18 dB


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 3.0 x 1.38 x 1.3 in

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

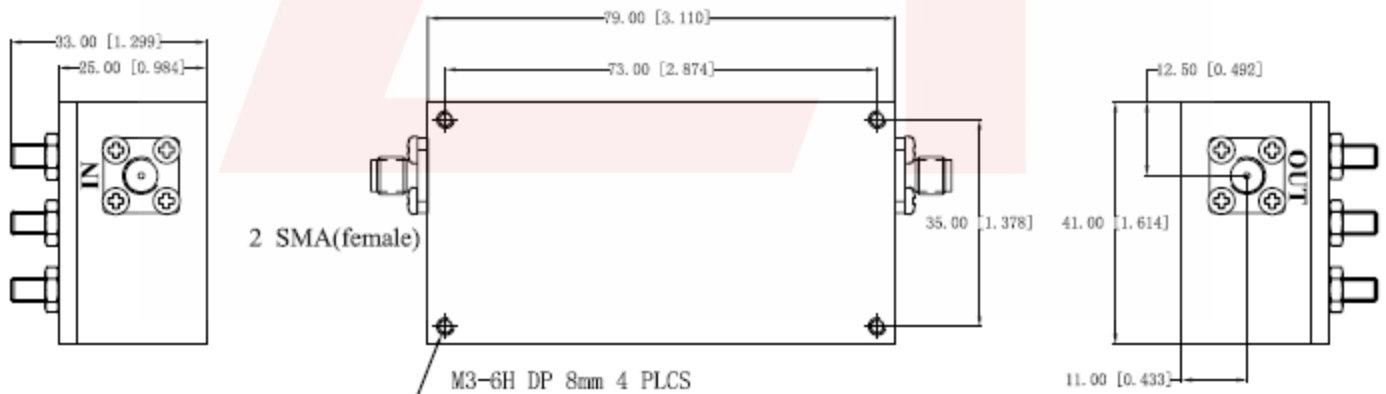



Plot:

