
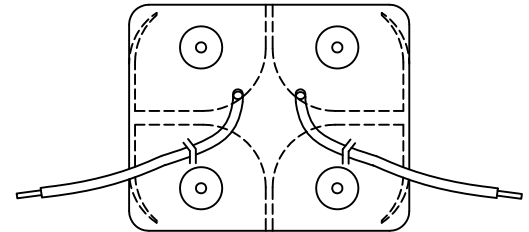
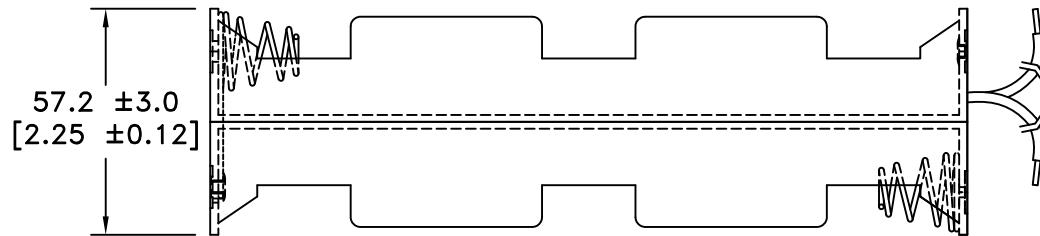


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/08/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/10/17	B	ADDED DIM. Ø3.50 DIM. 4.0 WAS 3.18 DIM. 150.0 WAS 152.4	T.B.	B.S.	
03/31/17	C	MOVED MOUNTING HOLE LOCATION	T.B.	B.S.	
04/07/17	D	ADDED DIM. Ø2.75	T.B.	B.S.	

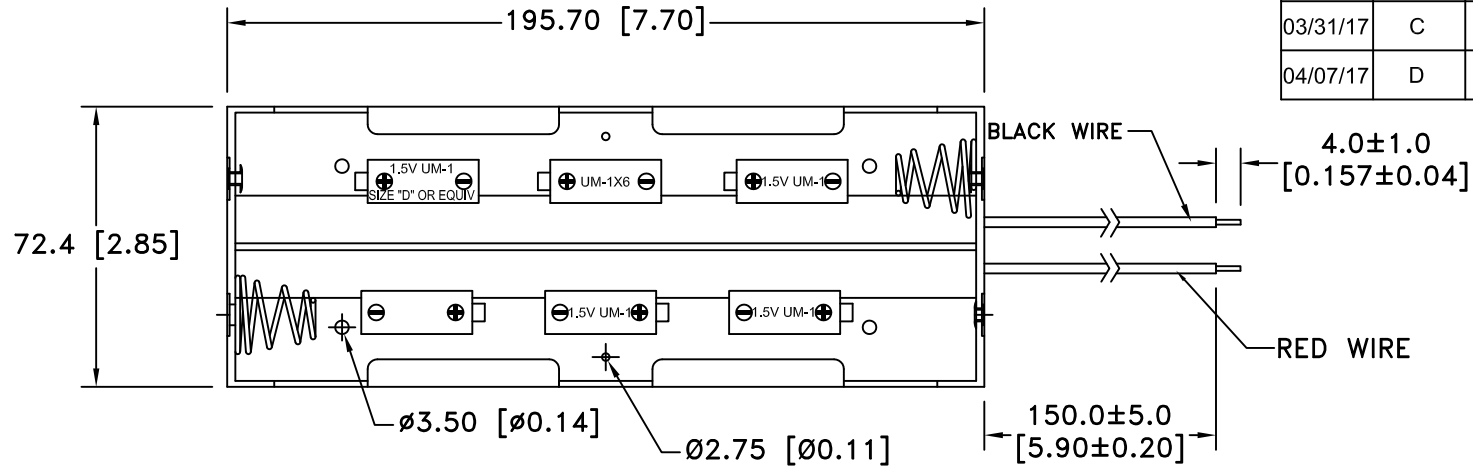


NOTES:

1. MATERIAL:

- HOUSING : BLACK POLYPROPYLENE
- FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
- TEMPERATURE RANGE: -10°C to +100°C
- RIVETS: BRASS, NICKLE PLATED.
- SPRING: SPRING STEEL, NICKLE PLATED.
- WIRES: 22 AWG, UL1007, CSA, TR64, 80°C, 300V
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title 12 "D" CELL HOLDER		
Angular ± 3°	Date 04/07/17	Drawing Number BH212DW	
		Approved By T.B.	