CIOD I CIN, II IO.	Drawing Title: South-African standard SABS 164-4, 53 Degree Right Plug, Blue to IEC320C13 Female for South Africa, GT Cable #428VDE: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500 +/- 50mm, GlobTek Black	
186 Veterans Drive, Model No. Power Cord		
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 208SA53R4282M5701(R)	Rev A
Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<a href="https://en.globtek.com/terms-and-conditions/">https://en.globtek.com/terms-and-conditions/</a>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

#### Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

### Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

## **Customer Approval of Specification:**

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

CIOD I CIX, IIIO.	Drawing Title: South-African standard SABS 164-4, 53 Degree Right Plug, Blue to IEC320C13 Female for South Africa, GT Cable #428VDE: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500 +/- 50mm, GlobTek Black		
•	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 208SA53R4282M5701(R)	Rev A	
Fax (201) 784-0111			

### **REVISION HISTORY**

F	REV	DESCRIPTION	SUB	DATE	APPROVED
	Α	Initial release	bsiep	11/18/2020	вов


Cordset Information:

CordsetColor:GlobTek Black Cord Length (mm):2500 +/- 50

## NOTES:


Cordset and connector are black with blue molded plug.

CIOD I CIX, IIIO.	Drawing Title: South-African standard SABS 164-4, 53 Degree Right Plug, Blue to IEC320C13 Female for South Africa, GT Cable #428VDE: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500 +/- 50mm, GlobTek Black		
•	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 208SA53R4282M5701(R)	Rev A	
Fax (201) 784-0111			

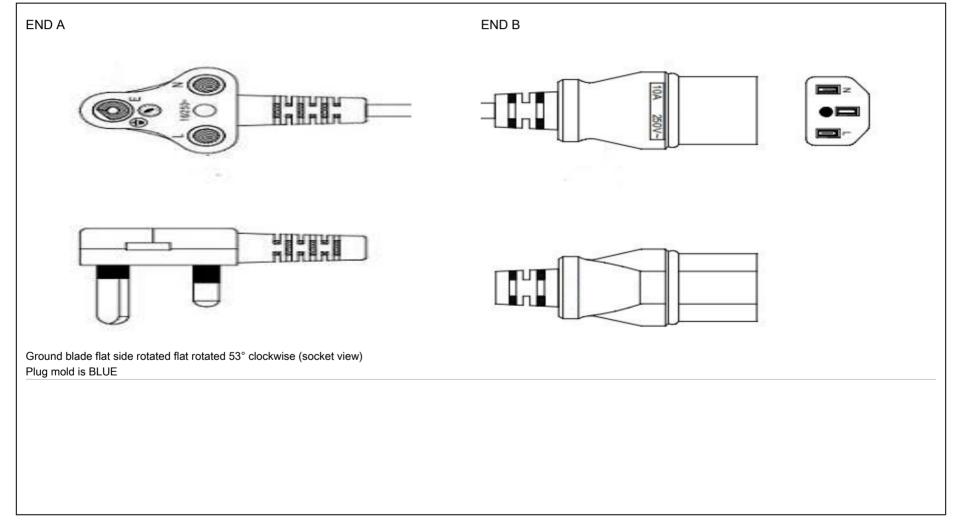

### PROPRIETARY INFORMATION

GlobTek, Inc. www.globtek.com	Drawing Title: South-African standard SABS 164-4, 53 Degree Right Plug, Blue to IEC320C13 Female for South Africa, GT Cable #428VDE: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500 +/- 50mm, GlobTek Black	
186 Veterans Drive, Model No. Power Cord		
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 208SA53R4282M5701(R)	Rev A
Fax (201) 784-0111		

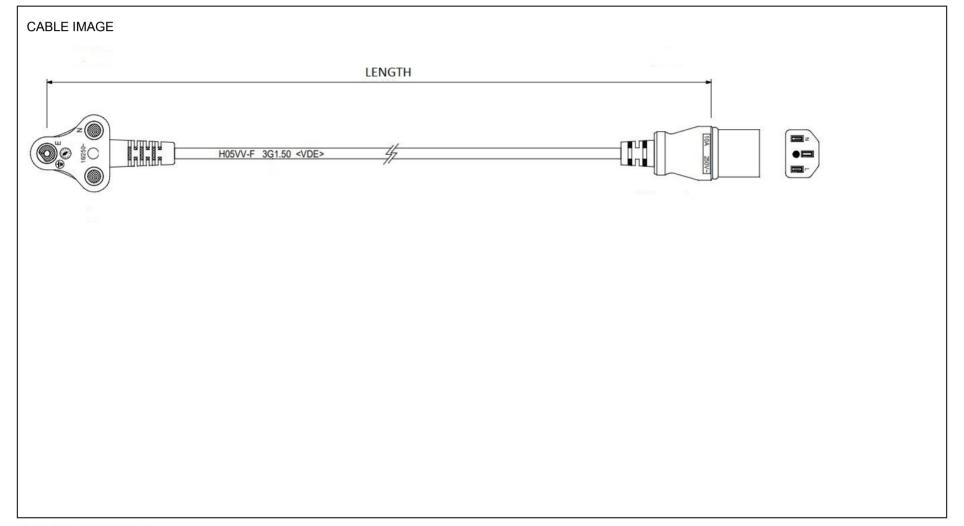

CIOD I CIX, II IC.	ww.globtek.com BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500 +/- 50mm, GlobTek Black		
•			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 208SA53R4282M5701(R)	Rev A	
Fax (201) 784-0111			

End A	Cable	End B
Code:208SA-53R-BLUE	Code:428VDE	Code:701SA
Description:South-African standard SABS 164-4, 53 Degree	Description:GT Cable #428VDE: 1.5 / 3 Conductors, mm OD,	Description:IEC320C13 Female for South Africa
Right Plug, Blue	H05VV-F, 70 Deg.C, 500V, BLU/BRN/GRN-YW, Approvals:	Rating (V):250
Rating (V):250	IEC 60227	Rating (A):10.0
Rating (A):10.0	Color:GlobTek Black	Gender:Male
Gender:Male	Wire Gauge(AWG):1.5	Overmolded:Yes
Overmolded:Yes	Cond:3	
	Type:H05VV-F	
	Temperature:70° C	
	Amps:16	
	Volts:500	
	OD:	
	ConductorsColors:BLU/BRN/GRN-YW	

Overall cable rating: 10A / 125V~

# Plug Approvals

Cable Approvals

**Connector Approvals** 



SABS South Africa (Cordsets)



**VDE** 

AGENCY ONLINE DOCUMENTS

http://en.globtek.com/cordsets/
RoHS/RoHS3 Declaration

https://www.globtek.com/pdf/rohs\_cert/01t3a000005CizaAAC

REACH Declaration

https://www.globtek.com/pdf/iso\_certificates/REACH.pdf

Conflict Minerals Declaration

https://www.globtek.com/pdf/conflict-minerals.pdf

Prop 65 Statement

https://en.globtek.com/prop-65-statement.pdf

CE.UKCA.Cord


https://globtek.secure.force.com/spec/ec\_decl\_product\_model\_family\_incl\_cord?id=01t3a000005Ciza

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

#### PROPRIETARY INFORMATION

GlobTek, Inc.  www.globtek.com  Drawing Title: South-African standard SABS 164-4, 53 Degree Right Plug, Blue to IEC320C13 Female for South Africa, GT Cable #428VDE: 1.5 / 3 Conductors, mm OD, H05VV-F, 70 Deg.C, 500' BLU/BRN/GRN-YW, Approvals: IEC 60227, 2500 +/- 50mm, GlobTek Black		
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 208SA53R4282M5701(R)	Rev A
Fax (201) 784-0111		

Hanking:200 Description:200 +/- 20mm Image:



Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):