

RAST | RAST 5 IDC Connectors

TE Internal #: 1971846-4 PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: Wire-to-Board

Number of Positions: 4

Number of Rows: 1

Centerline (Pitch): 5 mm [.197 in]

PCB Mount Orientation: Vertical

Features

Connectivity

Product Type Features

Connector System	Wire-to-Board			
Header Type	Fully Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Keying & Polarized Position Locations	3C, 4D			
Number of Positions	4			
Number of Rows	1			
PCB Mount Orientation	Vertical			
Electrical Characteristics				
Operating Voltage	250 VAC			
Body Features				
Primary Product Color	Natural			

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Contact Features

PCB Contact Termination Area Plating Material Thickness	3.8 μm[149.6 μin]
Mating Tab Width	6.3 mm[.248 in]
Mating Tab Thickness	.8 mm[.032 in]
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Silver
Cantact Daga Material	
Contact Base Material	Copper Alloy
Contact Base Material Contact Mating Area Plating Material	Silver
Contact Mating Area Plating Material	Silver
Contact Mating Area Plating Material Contact Type	Silver Tab
Contact Mating Area Plating Material Contact Type Contact Current Rating (Max)	Silver Tab
Contact Mating Area Plating Material Contact Type Contact Current Rating (Max) Termination Features	Silver Tab 16 A
 Contact Mating Area Plating Material Contact Type Contact Current Rating (Max) Termination Features Square Termination Post & Tail Dimension	Silver Tab 16 A .8 mm[.032 in]

Mechanical Attachment

PCB Mount Alignment Type	Polarizing Pegs
Mating Alignment Type	Keyed
Mating Retention	With
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without
Housing Features	
Housing Material	Nylon
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Length	27.3 mm[1.07 in]
Connector Height	12.8 mm[.5 in]

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Row-to-Row Spacing	2.5 mm
Usage Conditions	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	81
Packaging Type	Box, Tube
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)

Halogen Content

Solder Process Capability

(235)

Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



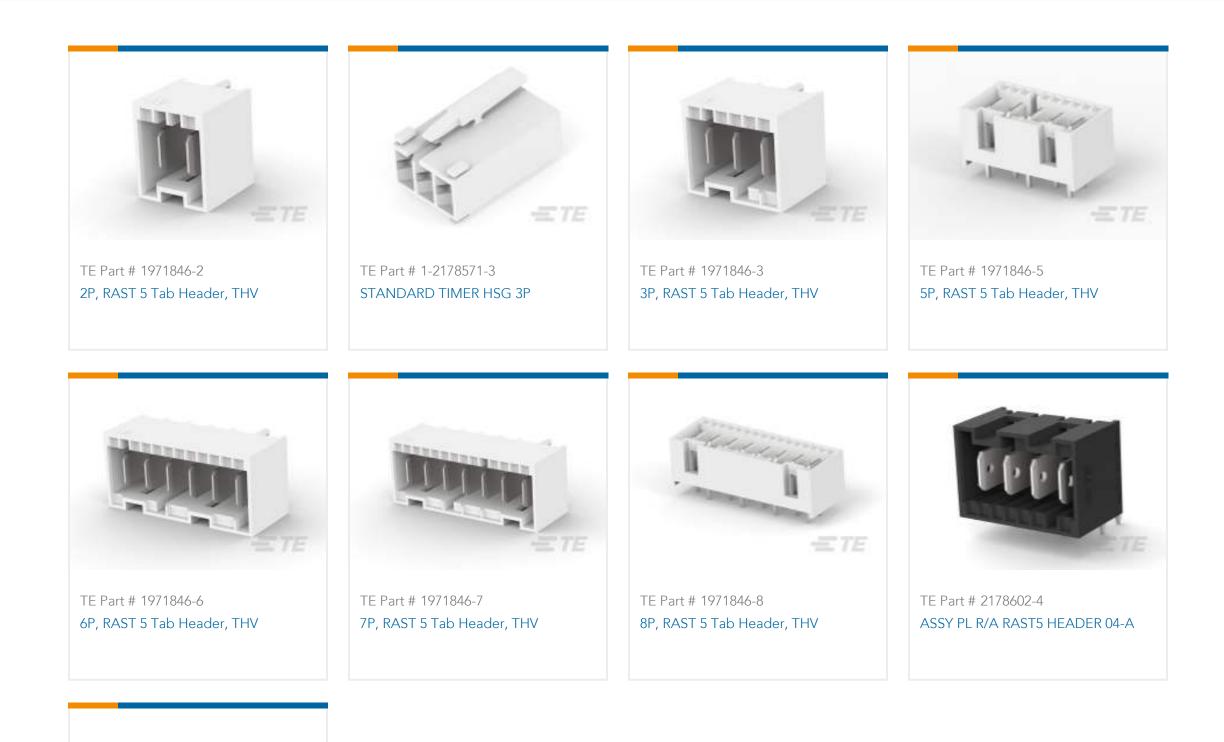


TE Part # 2-2178571-3 STANDARD TIMER HSG 3P

Also in the Series | RAST 5 IDC Connectors

And a set of the set o	A CARACTER OF A		
Automotive Terminals(8)	Connector Contacts(12)	Crimp Terminal Housings(41)	Insertion & Extraction Tools(1)
		Contraction of the second seco	
PCB Headers & Receptacles(417)	Rectangular Connector Housings(1)	Standard Edge Connectors(34)	Standard Rectangular Connectors(68)

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



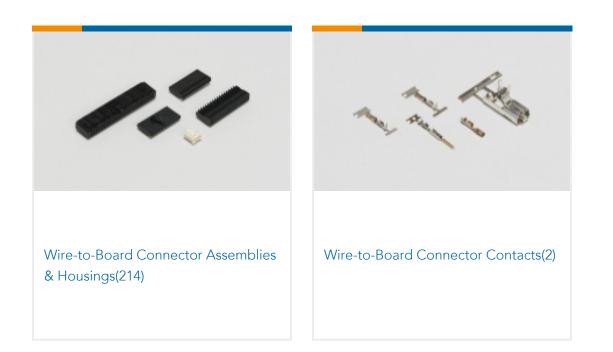

Customers Also Bought



SGI2.0 HEADER ASSEMBLY SMT 4P,	EP 06P HEADER ASY NO 4 PIN	EP 11P HEADER ASY NO 2,6 PINS	250 FASTON TAB TPBR	
KEY A,NTL				

Documents

Product Drawings

4P, RAST 5 Tab Header, THV

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1971846-4_B_c-1971846-4-b.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_1971846-4_B_c-1971846-4-b.3d_igs.zip English

Customer View Model

ENG_CVM_CVM_1971846-4_B_c-1971846-4-b.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Datasheets & Catalog Pages 7-1773465-5 RAST5.0 Flyer

English

Product Specifications

Product Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals VDE Certificate

English