

NOTES:


- ① MAT'L: COPPER
- PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FERRULE

STUD SIZES: (+.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING #E32244
 "CSA" LISTING #18689

WIRE SIZE: 22-18 AWG
 :25-15 MM²

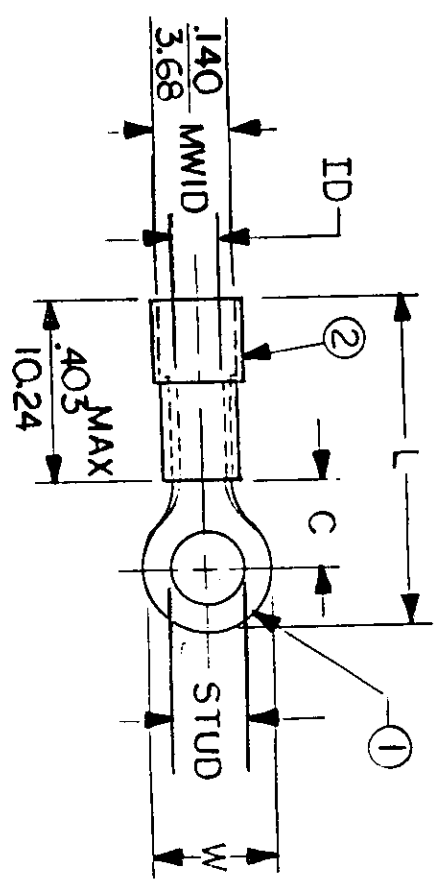

ALL DIMENSIONS = INCHES (M.M.) DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS
A-420-	.225	.157	.707	.062	02, 04, 06	.028 ^{±.001} .71
A-421-	.312 7.92	.270 6.86	.864 21.95	.062 1.57	06, 08, 10	.028 ^{±.001} .71
A-422-	.467 11.86	.386 9.80	1.058 26.87	.062 1.57	10, 14, 56	.028 ^{±.001} .71
A-426-	.534 13.56	.552 14.02	1.257 31.93	.054 1.37	10, 14, 56, 38	.031 ^{±.001} .79
A-432-	.254 6.45	.240 6.10	.805 20.45	.062 1.57	04, 06, 08	.028 ^{±.001} .71

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED

REFERENCE

SCALE: NTS

DATE

TITLE:

RING TONGUE TERMINAL VIBRAKRIMP 400 SERIES



DWG. NO. A CUSTOMER DWG

FILE NO. A-CD-401-01

SCALE: NTS
 DRAWN. BY: JJ
 CHKD. BY: GZ
 APPRD. BY:

DATE
 11-15-84
 12-5-84

RING TONGUE TERMINAL VIBRAKRIMP 400 SERIES