
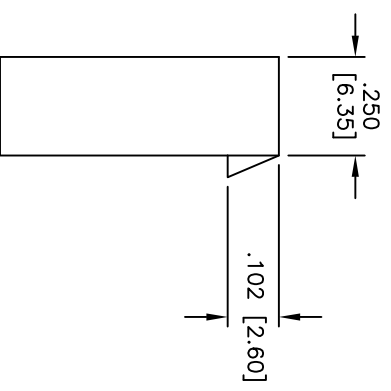
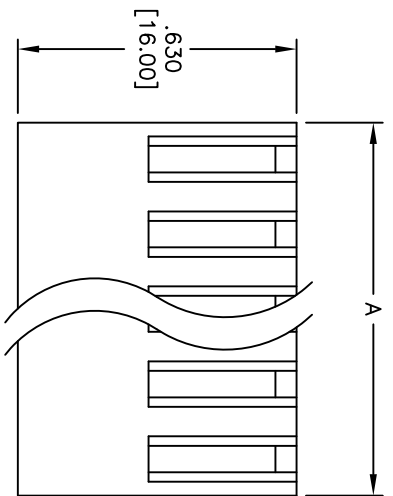


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

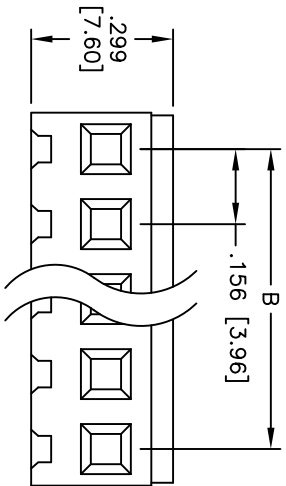

Positions: 2 thru 20  
 A = .156 [3.96] x No. of Positions + .016 [0.40]  
 B = .156 [3.96] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

.156 [3.96] WIRE HOUSING

**SPECIFICATIONS:**  
 Material: Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	4/12/05
CHECKED	
APPROVED	

TITLE		PART NO.		REV.
.156 [3.96] WIRE HOUSING		MTB-XX		-
SIZE	REF:	SCALE:	SHEET	1 OF 1
X		NTS	1	

6 5 4 3 2 1