


AMP	MATERIAL	PKG TYPE	QTY
8-36927-3	M/F 8-36927-0	BOX	25

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

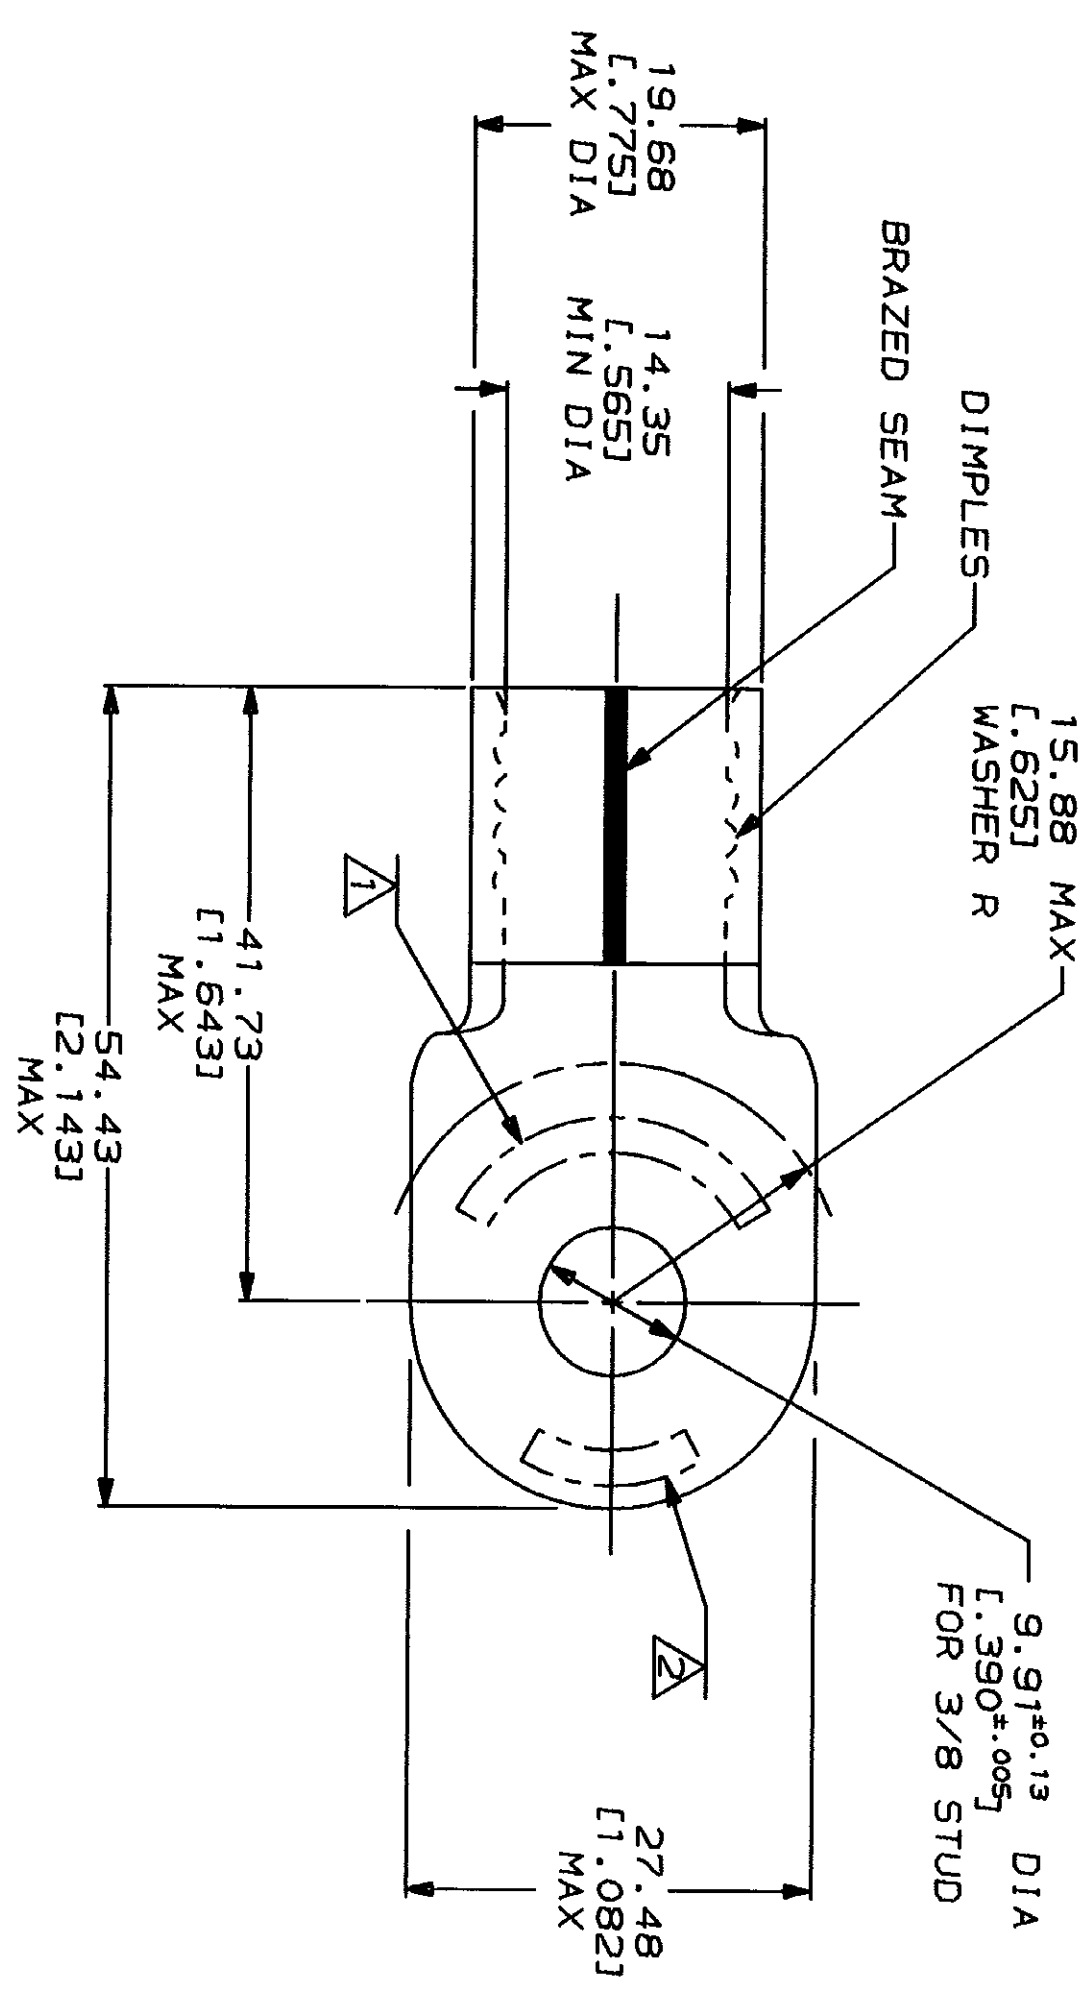

WESTROR
DIMENSIONS LISTED IN mm [INCHES]

LOC	DIST	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
G	14			REVISED & REDRAWN PER 0720-0037-93		5/20/93	PER

AMP	UL E13288 Listed
WIRE RANGE	
3/0 AWG SOLID OR STRANDED	3/0 AWG SOLID OR STRANDED
UL LR7189 Certified	MILITARY P/N AND CLASS
3/0 AWG SOLID OR STRANDED	NOT APPLICABLE

- 1 STAMP AMP 3/0W* APPROX AS SHOWN
- 2 STAMP 150 APPROX AS SHOWN
- 3 TONGUE MATERIAL THK: 2.31±0.08 [L.091 ±.003]

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
1-800-522-6752

FOR APPLICATION TOOLS INFORMATION
1-800-722-1111

FOR ORDER ENTRY
1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

CIRCULAR MIL AREA:
76.3-96.3mm² [150,000-190,000] CIR MILS
SOLID OR STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 1. 2 PLG DEC ± 0.201 (0081) 3 PLG DEC ± . . . ANGLES . . . MATERIAL COPPER ASTM B-152 ANNEALED

FINISH TIN PLATE
0.00254 [L.000100] MIN THK PER MIL-T-10727

DR 5/20/93	DK SCHRUM
CHK 1/27/94	RD HEIM
APPD 1/27/94	RE ROSER
APPD 1/27/94	JL HECKLEY
APPLICATION SPEC	
WEIGHT	

AMP AMP Incorporated Harrisburg, PA 17105-3608

TERMINAL, RING TONGUE, SOLID STRAND™

SIZE CAGE CODE DRAWING NO
SCALE 2:1 00779 G-36927

PART NO 36927

SHEET 1 OF 1