


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

E
D
C
B
A

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING

Dwg. No.
GRS-4121-0001

PANEL PIERCING

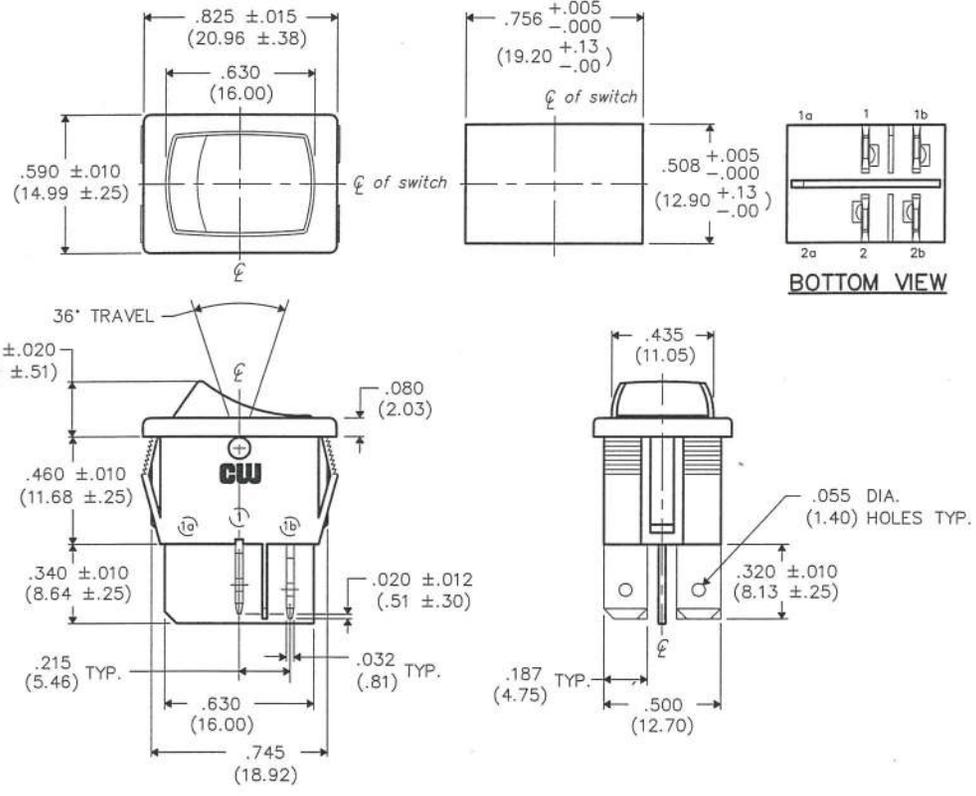

MATERIAL:

- ROCKER KNOB- Nylon - Red
- HOUSING- Nylon - Black
- TERMINAL/STATIONARY/MOVING CONTACT- Copper alloy.
- SPRING- music wire
- PLUNGER- plated steel

PERFORMANCE STANDARDS-

- Endurance- 25,000 cycles, at rated load.
- Contact Resistance- less than .01 Ohm at 10 mA (initial)
- Operating Temperature- 85° C
- High Voltage Dielectric Withstanding Voltage- 2,500 V, 60 Hz for 1 minute between mounting surface and circuit connections.
- HUMIDITY- Insulation resistance > 10³ MOhms after 100 hours at 95% R.H. and 50° C followed by 1 hour dry at ambient room conditions

ELECTRICAL RATING/AGENCY LISTING

- 8(8) 250 ~ 3mm Contact Gap
- 8A. 125VAC
6A. 250VAC

B-FORMAT 2002	REVISIONS	0	1	2	3	4	5	6	7	8	9	10
		NEW RELEASE DGW 4-19-2011	ADDED TO AND REVISED ELECTRICAL RATINGS/ AGENCY LISTING DGW 9-14-2012									

PDF FILE	CW INDUSTRIES Southampton, Pa. 18966	Title: MINI ROCKER SWITCH ASSEMBLY D.P.- S.T.
	TOLERANCES UNLESS OTHERWISE SPECIFIED	
	2 Place Decimal ±.010 METRIC 3 Place Decimal ±.005 1 Place Dec. ±.25mm Angles ±1° 2 Place Dec. ±.13mm	
	Made for: CW IND.	Division: SWITCH
Drawn by: DGW 4-19-2011		Dwg. No. GRS-4121-0001
Checked by: <i>GW 4/15/2-11</i>		
Approval: <i>C. Hanson 4/19/2-11</i>		

MASTER