

Ratings

Voltage: 30 V
 Temperature: -10° to 80° C
 Flammability: VW-1, FT1

Conductor

Conductor count: 4 (1 twisted pair, 2 single conductors)
 Gauge: 28 AWG (1P), 26 AWG (2C)
 Material: tinned copper strands
 Strand size: $\varnothing 0.13 \times 7$ (1P), $\varnothing 0.16 \times 7$ (2C)
 Max resistance at 20 °C: 239 Ω /km (1P), 150 Ω /km (2C)

Insulator

Material: HD-PE (1P), SR-PVC/35P (2C)
 Color: white, green (1P), black, red (2C)
 Diameter: $\varnothing 0.85 \pm 0.10$ mm (1P), $\varnothing 1 \pm 0.10$ mm (2C)
 Nominal thickness: 0.22 mm (1P), 0.24 mm (2C)
 Resistance at 20 °C: 100 M Ω /km (1P), 10 M Ω /km (2C)

Shield

Type: foil + braided
 Material: aluminum mylar, tinned copper strands
 Stranding: 16/5/ $\varnothing 0.10$ mm
 Coverage: 100% (foil), 65% minimum (braid)

Drain

Material: tinned copper strands
 Stranding: $\varnothing 0.16 \times 7$

Outer jacket



Material: PVC/79A
 Color: black
 Diameter: $\varnothing 4.3 \pm 0.20$ mm
 Nominal thickness: 0.90 mm

Wire marking: E339579 UL AWM STYLE 2725

28AWG/1P+26AWG/2C 80°C 30V VW-1 --- cUL AWM
 28AWG/1P+26AWG/2C I/II A 80°C 30V FT1 HIGH SPEED
 USB 2.0 TENSILITY

Tests


Jacket tensile strength: 1.05 kgf/mm²
 HD-PE Insulator tensile strength: 1.69 kgf/mm²
 SR-PVC Insulator tensile strength: 2.11 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum jacket tensile strength 70 % original
 Minimum jacket elongation 65 % original
 Minimum HD-PE insulator tensile strength 75 % original
 Minimum HD-PE insulator elongation 75 % original
 Minimum SR-PVC insulator tensile strength 70 % original
 Minimum SR-PVC insulator elongation 70 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /4 hour, no observed cracking
 Dielectric test: 1500 Vac for 1 minute without breakdown

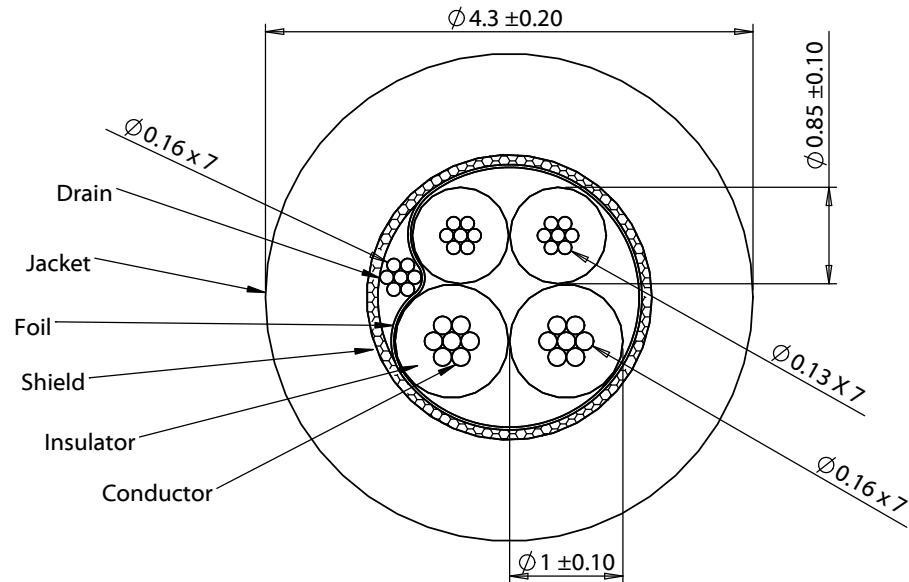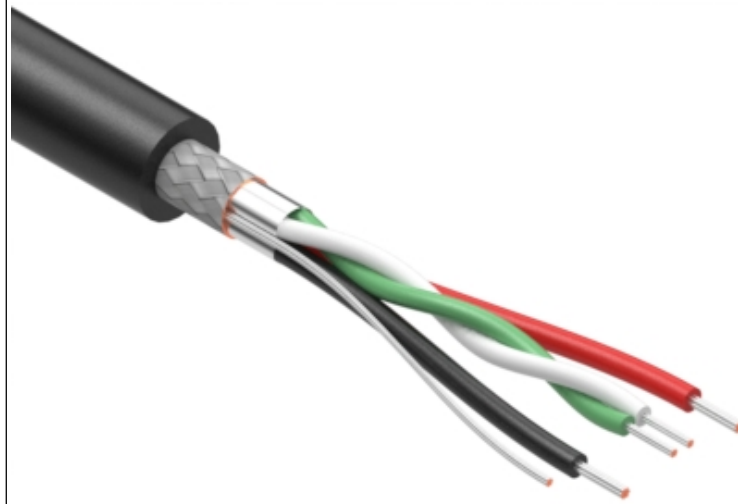

Revision:	Date:	Description:
A	12/22/2016	Initial release

Prepared: AG <small>Digitally signed by AG Date: 2019.03.19 15:43:21 -07'00'</small>
Verified: JP <small>Digitally signed by JP Date: 2019.03.19 15:54:30 -07'00'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 4C, 1PR 28 AWG, 2C 26 AWG, UL2725, 30V, 80C, 4.3 mm, shielded, VW-1, PVC, 79A, USB 2.0

TENSILITY	
<small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>	
Size: A	Part number: 30-00872
Scale: 15:1	
Sheet 1 of 1	