

# PTC-101 Series

## IEC 61850-3 Ethernet-to-fiber media converters



### Features and Benefits

- 10/100BaseT(X) auto-negotiation and auto-MDI/MDI-X
- Link Fault Pass-Through (LFPT)
- Power failure alarm by relay output (LV model only)
- -40 to 85°C operating temperature range
- Redundant dual DC power inputs (LV model only)
- Integrated high-reliability power supply eliminates the need for external power transformer

### Certifications



## Introduction

The PTC-101 Ethernet-to-fiber media converters convert from 10/100BaseT(X) to 100BaseFX. Models are available with either SC, ST, or LC connectors. The PTC-101 converters eliminate the need for additional wiring, and support IEEE 802.3 and IEEE 802.3u/x protocols with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing to provide a total solution for your industrial Ethernet networks. The PTC-101 is compliant with mandatory sections of IEC 61850-3, covering operating temperature, power input voltage, surge, ESD, and vibration, as well as conformal coating and power insulation, making the media converters suitable for a variety of industrial applications.

## Specifications

### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	1
100BaseFX Ports (multi-mode SC connector)	PTC-101-M-SC-HV/M-SC-LV: 1
100BaseFX Ports (multi-mode ST connector)	PTC-101-M-ST-HV/M-ST-LV: 1
100BaseFX Ports (single-mode SC connector)	PTC-101-S-SC-HV/S-SC-LV: 1
100BaseFX Ports (single-mode ST connector)	PTC-101-S-ST-HV/S-ST-LV: 1
100BaseFX Ports (multi-mode LC connector)	PTC-101-M-LC-HV/M-LC-LV: 1
100BaseFX Ports (single-mode LC connector)	PTC-101-S-LC-HV/S-LC-LV: 1

Magnetic Isolation Protection	1.5 kV (built-in)		
Optical Fiber		100BaseFX	
		Multi-Mode	Single-Mode
	Wavelength	1300 nm	1310 nm
	Max. TX	-10 dBm	0 dBm
	Min. TX	-20 dBm	-5 dBm
	RX Sensitivity	-32 dBm	-34 dBm
	Link Budget	12 dB	29 dB
	Typical Distance	5 km <sup>a</sup> 4 km <sup>b</sup>	40 km <sup>c</sup>
	Saturation	-6 dBm	-3 dBm
<p>a. 50/125 μm, 800 MHz x km fiber optic cable  b. 62.5/125 μm, 500 MHz x km fiber optic cable  c. 9/125 μm single-mode fiber optic cable  d. 9/125 μm single-mode fiber optic cable (80 km)</p>			

### Power Parameters

Input Voltage	LV-DC models: 20 to 72 VDC HV-AC models: 100 to 240 VAC HV-DC models: 88 to 300 VDC
Input Current	LV-DC models: 150 mA @ 20 to 72 VDC HV-AC models: 200 to 350 mA @ 100 to 240 VAC HV-DC models: 47 mA @ 88 VDC
Overload Current Protection	Supported
Power Consumption	LV-DC models: 150 mA @ 20 to 72 VDC HV-AC models: 200 to 350 mA @ 100 to 240 VAC HV-DC models: 47 mA @ 88 VDC

### Physical Characteristics

Housing	Metal
Dimensions	152.15 x 126.46 x 66.65 mm (5.99 x 4.86 x 2.62 in)
Weight	Packaged: 875 g (1.92 lb) Product only: 690 g (1.52 lb)
Installation	DIN-rail mounting

### Environmental Limits

Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

### Standards and Certifications


EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV

	IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
Environmental Testing	IEC 60068-2-1 IEC 60068-2-14 IEC 60068-2-2 IEC 60068-2-3
Safety	EN 60950-1, UL 60950-1
Vibration	IEC 60068-2-6
Power Substation	IEC 61850-3
<b>MTBF</b>	
Time	1,211,613 hrs
Standards	MIL-HDBK-217F
<b>Warranty</b>	
Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>
<b>Package Contents</b>	
Device	1 x PTC-101 Series media converter
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions

### PTC-101-M-ST-HV (other models available by request)

Unit: mm (inch)

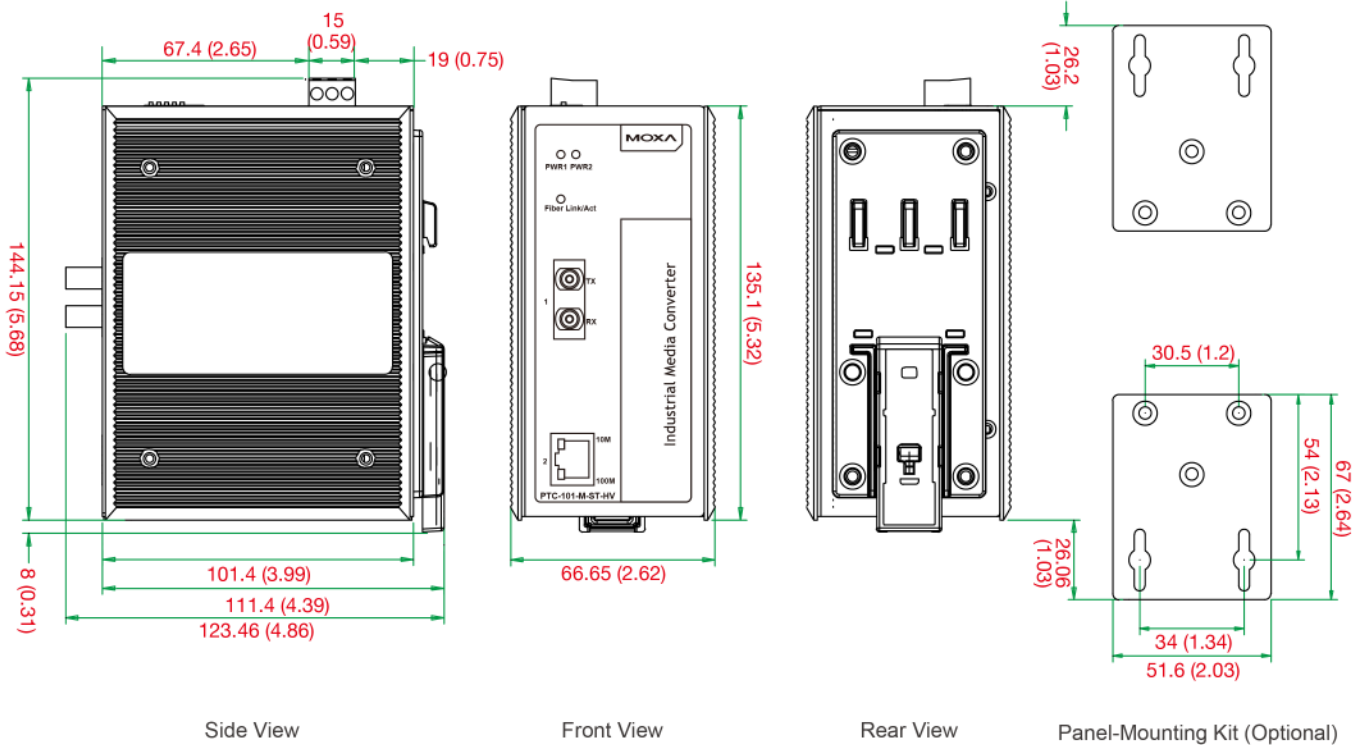

## Ordering Information

Model Name	Fiber Module Type	Input Voltage
PTC-101-M-SC-LV	Multi-mode SC	20-72 VDC
PTC-101-M-ST-LV	Multi-mode ST	20-72 VDC
PTC-101-M-LC-LV	Multi-mode LC	20-72 VDC
PTC-101-S-SC-LV	Single-mode SC	20-72 VDC
PTC-101-S-ST-LV	Single-mode ST	20-72 VDC
PTC-101-S-LC-LV	Single-mode LC	20-72 VDC
PTC-101-M-SC-HV	Multi-mode SC	85-264 VAC1088-300 VDC
PTC-101-M-ST-HV	Multi-mode ST	85-264 VAC1088-300 VDC
PTC-101-M-LC-HV	Multi-mode LC	85-264 VAC1088-300 VDC
PTC-101-S-SC-HV	Single-mode SC	85-264 VAC1088-300 VDC
PTC-101-S-ST-HV	Single-mode ST	85-264 VAC1088-300 VDC
PTC-101-S-LC-HV	Single-mode LC	85-264 VAC1088-300 VDC

## Accessories (sold separately)

### DIN-Rail Mounting Kits

DK-DC50131-01	DIN-rail mounting kit, 6 screws
---------------	---------------------------------

### Wireless AP Mounting Kits

DK-DC50131	DIN-rail mounting kit
------------	-----------------------

### Wall-Mounting Kits

WK-51-01	Wall mounting kit with 2 plates (51.6 x 67 x 2 mm) and 6 screws
----------	---

© Moxa Inc. All rights reserved. Updated Dec 22, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.