

REV	ECN	APP'D
-	5536	

SHELL
(GOLD PLATED)

HOUSING

SEALING
GROMMET


M81714/
63-12F
58982 XXXX
SJG012270
APCD

WHITE MARKING
.062 HT
SIDE OPTIONAL

DATE CODE

.075

1.125 MAX

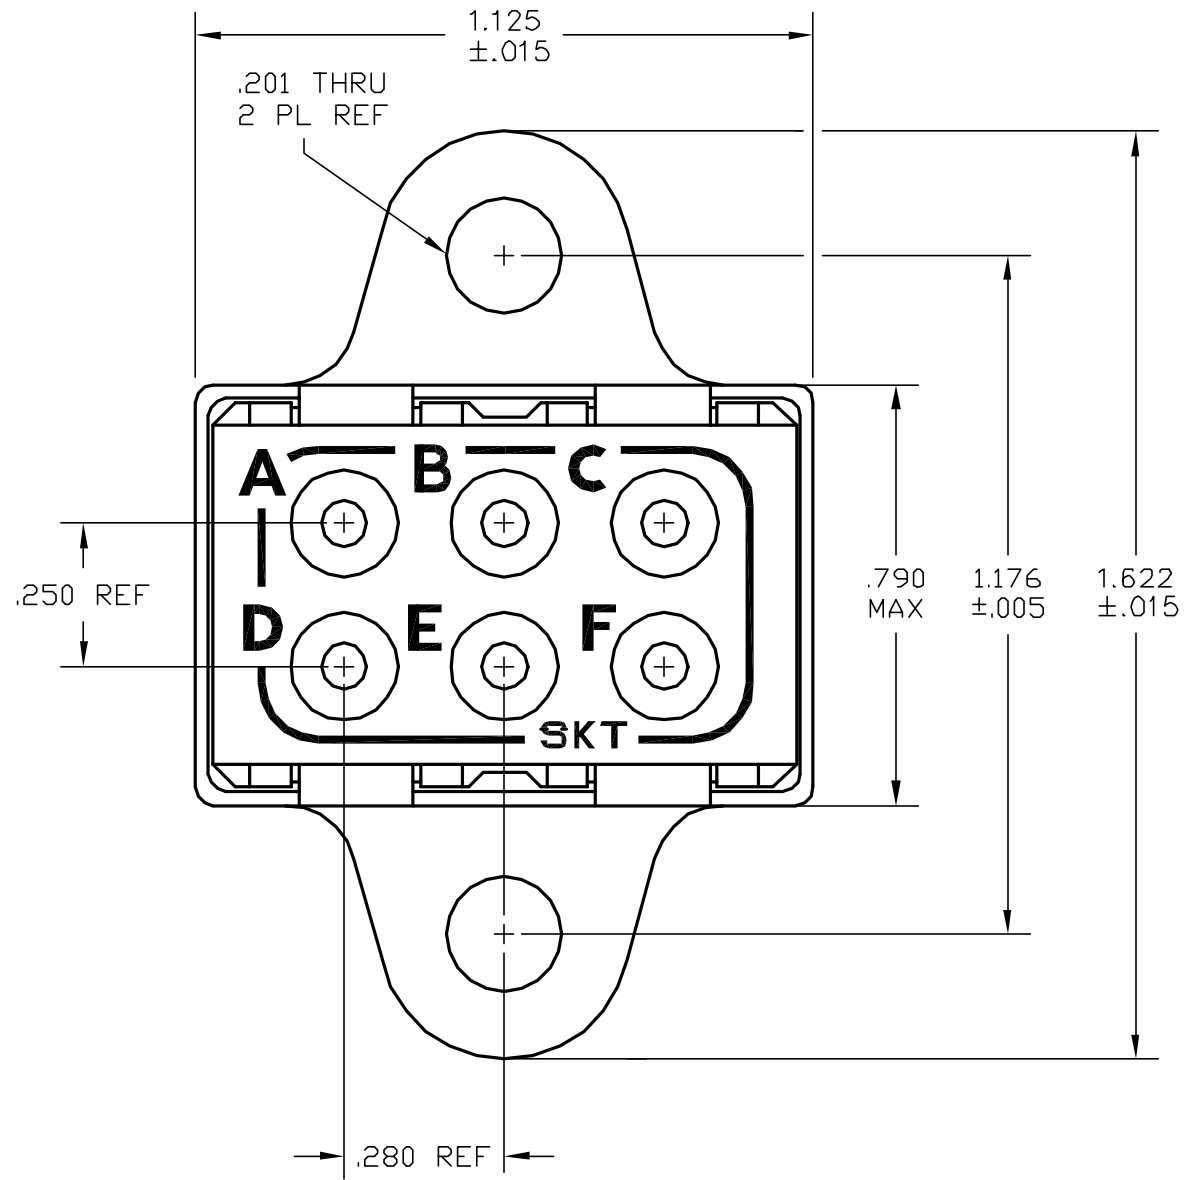

NOTES:

- MATERIALS:
 BODY: POLYETHERIMIDE PER MIL-P-46184.
 GROMMET: SILICONE BLEND ELASTOMER.
 CONTACT RETAINERS: BERYLLIUM COPPER.
 SHELL: COPPER ALLOY, GOLD PLATE PER MIL-G-45204
- PERFORMANCE SPECIFICATIONS:
 OPERATING TEMP: -65° TO 200°C
 CURRENT RATING: 23 AMPS
 VIBRATION AND SHOCK: PER MIL-T-81714,
 PARAGRAPH 3.5.5 AND 3.5.8.
- MODULE SUPPLIED WITH SEVEN (7) M39029/22-605
 SOCKET CONTACTS AND TWO (2) MS27488-12 SEALING
 PLUGS.

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.015 ANGLES ±2'	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE SOCKET GROUND MODULE SIZE 12 - FLANGE MOUNT M81714/63-12F		
			ENGR R. SWAINE 10/15/04	CHKD	SIZE B	DWG NO. SJG012270	REV -
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA			APPD	CODE: 58982	SCALE: 3X	SHEET 1 OF 1

SJG012270

SJG012270