


Mechanical Specifications

D	20.0±1.0 mm
T	6.0mm Max
Lead Diameter	1.0±0.1mm
S	9.5±1.0mm
L	45.0mm Nom
B	9.2 ±0.5mm
C	2.7±0.5mm

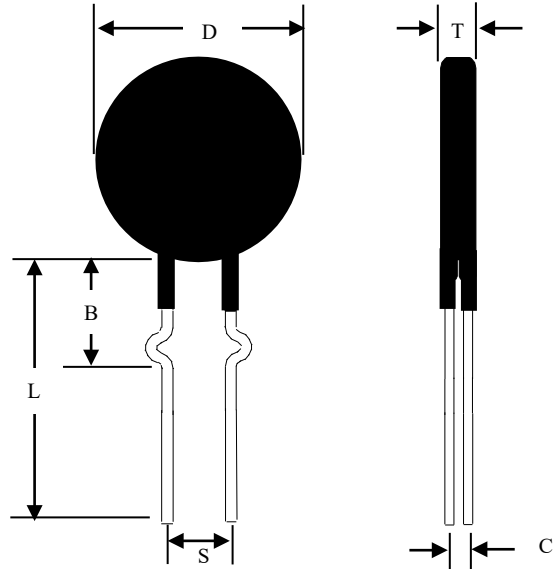

Electrical Specifications

Resistance @ 25°C	10.0Ω ±20%
Max Steady State Current Up to 65°C	8.0 A
Max recommended energy rating (Joules)	90.0 J
Resistance @ 100% of Max Current	0.145 Ω
Resistance @ 50% of Max Current	0.300 Ω
Body Temperature @ 100% Current rating	187°C
Dissipation Constant	32.4mW/°C
Thermal Time Constant	94 seconds
Material Type	“H”
Max Recommended Capacitance @ 120/240 VAC	6000µF / 1400µF

REV	DATE	CHANGE
0	11/11/08	Issue
1	9/22/20	Revise Mechanical Dimensions

Ametherm, Inc
961 Fairview Drive
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com

Reliability Delivered On Time