


**D-SUBMINIATURE CONNECTORS:**  
**K22X Series**  
 Right Angle PCB Mount 0.318" Footprint

**K22X Series Dimensions**  
 Dimensions in mm

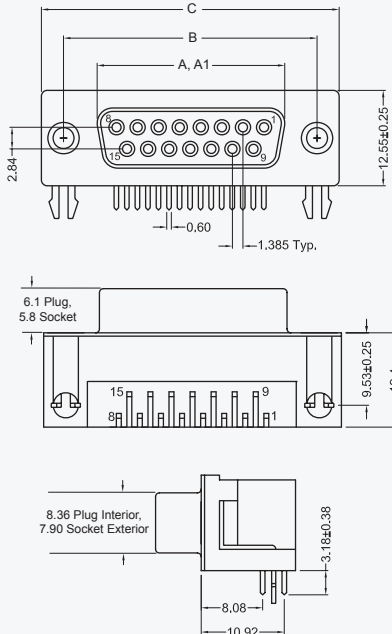

| Shell Size | In mm          |                |                |                |
|------------|----------------|----------------|----------------|----------------|
|            | A              | A1             | B              | C              |
| 9<br>(E)   | ±.010<br>±0.25 | ±.010<br>±0.25 | ±.005<br>±0.13 | ±.015<br>±0.38 |
| 15<br>(A)  | .643<br>16.33  | .666<br>16.92  | .984<br>24.99  | 1.213<br>30.81 |
| 25<br>(B)  | 1.511<br>38.38 | 1.534<br>38.96 | 1.852<br>47.04 | 2.088<br>53.04 |
| 37<br>(C)  | 2.159<br>54.84 | 2.182<br>55.42 | 2.500<br>63.50 | 2.729<br>69.32 |

A = Exterior of Female Shell (S)  
 A1 = Interior of Male Shell (P)

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

Generated Part Number

**K22X-E9P-N**

Part Number Builder

|             |   |                    |              |                 |                |
|-------------|---|--------------------|--------------|-----------------|----------------|
| <b>K22X</b> | - | <b>E9</b>          | <b>P</b>     | <b>N</b>        |                |
| Series      |   | Shell Size Contact | Contact Type | Mounting Option | Plating Option |

**Series**

**K22X** - D-Subminiature Connector, Right Angle

**Shell Size-Contact Option**

- 9 Contacts
- 15 Contacts
- 25 Contacts
- 37 Contacts

**Contact Type**

- P** - Pin Contact (Plug)
- S** - Socket Contact (Receptacle)

**Mounting Option**

- N** - With Boardlocks and #4-40 UNC Threaded Inserts
- NJ** - With Boardlocks and # 4-40 Jackscrews Installed

**Plating Option**

- Blank** - Gold Flash
- 30** - 30µ" Gold

Contact Kycon for Other Options